

## **MICROCON®**

MICROCON je výrobcem kompletních programovatelných pohonů s krokovými motory i dodavatelem jednotlivých komponentů.

Firma vznikla v roce 1991, od roku 1995 funguje jako společnost s ručením omezeným. V počátcích byly prioritní činnosti spojené s vývojem a výrobou programovatelného řízení krokových motorů. Sortiment byl brzo rozšířen o nabídku krokových motorů a později i dalších komponentů jako jsou pružné spojky, posuvové šrouby, lineární vedení, šnekové převodovky, kuličkové šrouby a napájecí zdroje.

V České a Slovenské republice Microcon zastupuje níže jmenované firmy jako autorizovaný distributor:

PACIFIC SCIENTIFIC (USA) - pohony s krokovými motory

HUCO ENGINEERING (GB) - pružné spojky

KERK MOTION PRODUCTS (USA) - posuvové šrouby a lineární vedení

Dále firma Microcon dodává produkty firem:


KURODA (Japonsko) - lineární vedení a kuličkové šrouby

TOS Znojmo - šnekové převodovky

**KOMPLETNÍ DODÁVKY POHONŮ OD JEDNOHO DODAVATELE**



# flexible couplings



---

## The Company & Its Products

Huco products are manufactured in Hertford, England, in a modern plant equipped with all necessary design, development, toolroom and production facilities. The plant operates a total quality assurance system assessed to ISO 9001-2000.

Huco products are available through distribution or Huco warehouses in most of the industrialised nations of the world. Recognised as one of the leading manufacturers of small flexible couplings, Huco has been responsible for several 'firsts' since its inception in 1965

Huco was first to use thermoplastics as active transmission elements and was demonstrating plastic universal joints as far back as 1962. Other 'moving parts' couplings followed, notably the Uni-Lat and Oldham concepts. In the early 1990's Huco launched the Flex-M high integrity membrane coupling and this was followed by the Flex-B series of bellows couplings, another new and innovative design.

With the recent addition of the Multi-Beam and Single-Beam range of helical beam couplings, Huco can offer solutions that address specific issues in most coupling applications.

Whether the accent is on high torsional stiffness, generous misalignment capability, high speed operation recyclable hubs, or a capacity for operating in push/pull mode, Huco can help. If your needs should fall outside our standard range, we offer a customised service to meet your low-cost, high volume requirements.

# Contents













|  |         |
|--|---------|
| PRODUCT OVERVIEW   | 4 - 5   |
| SELECTING FLEXIBLE COUPLINGS   | 6       |
| HOW TO ORDER   | 7       |
| INSTALLING COUPLINGS   | 8 - 10  |
| HIGH PERFORMANCE COUPLINGS<br><i>Huco-Flex B, Huco-Flex Ni &amp; Huco-Flex M</i>         | 11 - 20 |
| GENERAL PURPOSE MOTION CONTROL COUPLINGS<br><i>Huco-Oldham &amp; Uni-Lat</i>             | 21 - 26 |
| BEAM COUPLINGS<br><i>Single Beam, Multi-Beam, Step Beam</i>                              | 27 - 36 |
| LIGHT POWER DRIVE COUPLINGS<br><i>Jaw (Spider), Double Loop &amp; Magnetic Couplings</i> | 37 - 42 |
| PLASTIC UNIVERSAL JOINTS & TELESHAFTS<br><i>Huco-Pol &amp; Huco Teleshfts</i>            | 43 - 48 |
| ADJUSTABLE FRICTION CLUTCHES<br><i>Huco Vari-Tork</i>                                    | 49 - 52 |
| BEVEL GEARBOXES<br><i>Huco L-Box &amp; Huco T-Box</i>                                    | 53 - 54 |
| BORE ADAPTORS<br><i>Huco-Lok</i>   | 55 - 56 |
| FORMULAE & CONVERSION FACTORS<br><i>For Motion Transfer</i>                              | 57 - 59 |




















Certificate No. GB00304

# Product Overview

## Product Overview

| Stainless Steel Bellows type  | Nickel Bellows type   | Membrane type  | Multi-Beam type  | Single-Beam type   | Step-Beam type  |
|---|---|--|--|--|---|
| Flex B<br>Short 3-convolution<br><br>Stretched<br>2-convolution<br><br>Long<br>9-convolution<br> | Flex Ni<br><br> | Flex M<br>Single-stage<br><br>Short two-stage<br><br>Long two-stage<br> | Multi-Beam<br>6-Beam<br><br><br><b>Material Options:</b><br>Aluminium<br>Stainless Steel<br>Acetal | Single-Beam<br><br><b>Material Options:</b><br>Aluminium<br>Stainless Steel | Step-Beam<br><br><b>Material Options:</b><br>Nylon |
| General description   |   |  |  |  |   |
| Precision couplings with excellent kinematic properties. The 3 types offer differing combinations of stiffness, radial compensation and axial motion.   | Precision couplings with excellent kinematic properties. The 3 types offer differing combinations of stiffness, radial compensation and axial motion.                             | Precision couplings with excellent kinematic properties. Dynamically balanced construction. Single-stage versions make up into 'whirl' free Cardans. The 2-stage versions offer short envelopes and low bearing loads respectively.  | General purpose single piece couplings<br>Single stage (3-beam)<br>Two stage (6-beam)<br>Material options for moisture and corrosion resistance.   | More flexible than Multi-Beam but less torsional rigidity.   | Unique coupling design gives excellent combination of radial flexibility with torsional stiffness.                                    |
| Where to use  |   |  |  |  |   |
| High-end servo drives, pulse generators, scanners, positioning slides, metering valves, etc.  | High-end servo drives, pulse generators, scanners, positioning slides, metering valves, etc.  | High-end servo drives, pulse generators, scanners, positioning slides, high speed dynamometers, unsupported drive shafts, etc.   | Stepper and servo drives, encoders, general purpose light duty power transmission applications.  | Stepper drives, encoders, general purpose light duty power transmission applications.  | Encoders, tachogenerators, small pumps, motors and drives   |
| Speeds  |   |  |  |  |   |
| Up to 5000 rpm in standard form.  | Up to 5000 rpm in standard form.  | Up to 5000 rpm in standard form.<br>Up to 30000 rpm in balanced form.  | Up to 5000 rpm in standard form.<br>Up to 30000 rpm in balanced form.  | Up to 5000 rpm in standard form.<br>Up to 30000 rpm in balanced form.  | Up to 10000 rpm   |
| Peak torque largest size  |   |  |  |  |   |
| 12.5 Nm   | 12.5 Nm   | 60 Nm  | 140 Nm   | 30 Nm  | 25 Nm   |
| Standard bores  |   |  |  |  |   |
| 3 to 20   | 3 to 20   | 3 to 28  | 1 to 38  | 3 to 26  | 3 to 12.7   |
| Temperature range   |   |  |  |  |   |
| -40° to +120°C  | -40° to +120°C  | -40° to +120°C   | -40° to +140°C   | -40° to +140°C   | -20 to +150°C   |
| Electrically isolating  |   |  |  |  |   |
| No, unless used with insulating bore adaptors   | No, unless used with insulating bore adaptors   | No, unless used with insulating bore adaptors  | Aluminium } No<br>Stainless Steel }<br>Acetal } Yes  | Aluminium } No<br>Stainless Steel }  | Yes   |
| Connection  |   |  |  |  |   |
| Clamp or Set Screw  | Clamp or Set Screw  | Clamp or Set Screw   | Clamp or set screw   | Clamp or Set Screw   | Clamp or Set Screw  |
| Page 12 - 13  | Page 14 - 15  | Page 16 - 19   | Page 28 - 33   | Page 34 - 35   | Page 36   |

# Product Overview

| Sliding Disc type   | Universal / Lateral type  | Double Loop type  | Jaw Coupling  | Universal Joints & Teleshfts   | Friction Clutches  | Bevel Gearboxes  |
|---|---|---|---|--|--|--|
| <p>Oldham<br/>Blind bored</p>  <p>Thru' bored</p>  <p>Thru' bored</p>  <p><b>Material Options:</b><br/>Aluminium<br/>Stainless Steel</p> | <p>Uni-Lat</p>                        | <p>Flex-P</p>    | <p>Jaw coupling</p>  | <p>Huco-Pol<br/>Single joints</p>  <p>Double joints</p>  <p>Teleshfts</p>  | <p>Vari-Tork<br/>Basic clutch</p>  <p>Basic clutch + sleeve adaptor</p>  <p>Basic clutch + Oldham coupling</p>  | <p>L-Box</p>  <p>T-Box</p>   |
| General description   |   |   |   |  |  |  |
| <p>General purpose, robust, easy to use 3-part couplings with replaceable wear elements. Generous radial compensation and pull-apart / re-engage facility for blind assemblies.</p>   | <p>Unique, general purpose light duty couplings with generous angular and radial misalignment compensation. Resist axial motion, can anchor unrestricted shafts and perform light push/pull duties.</p> | <p>Exceptional flexibility in all three directions, radial, angular and axial</p>   | <p>High torque capacity and high speed are available from this naturally balanced coupling</p>        | <p>Light duty plastic universal joints and extensible drive shafts (teleshfts). Low mass, corrosion resistant, ideal where conventional steel joints would be under-utilised.</p>  | <p>Small, user-adjustable torque limiters for concentric or in-line mounting. Operate by friction using interleaved clutch plates.</p>   | <p>Small 90° drives encased in molded housings providing electrical isolation between shafts and mounting surface. The L-Box is rated for intermittent use, the T box for continuous. 1:1 &amp; 2:1 ratios are available with the T-Box.</p> |
| Where to use  |   |   |   |  |  |  |
| <p>Stepper drives for most applications including positioning slides, pumps, actuators, etc.</p>  | <p>Encoder, resolver, tacho, potentiometer drives. Small positioning slides, dosing pumps, &amp; light drives generally.</p>  | <p>Light power drives, pumps and small generators</p>   | <p>Light power drives where misalignment is small</p>   | <p>Intermittent applications in business machines, instrumentation, lab equipment, analytical apparatus, etc., where steel joints would be under-utilised.</p>   | <p>Friction clutches interrupt rotation when the load being transmitted reaches a pre-determined threshold. Used in all kinds of small drives to help protect personnel and equipment.</p>   | <p>L-box offers a compact means to route drives thru' 90°. T-box offers 2 &amp; 3 shaft configurations for multiple power offtake.</p>   |
| Speeds  |   |   |   |  |  |  |
| Up to 3000 rpm.   | Up to 3000 rpm.   | Up to 3000 rpm.   | Up to 40,000 rpm.   | Up to 1000 rpm   | Up to 1000 rpm slipping speed  | Up to 1500 rpm for T-box   |
| Peak torque largest size  |   |   |   |  |  |  |
| 44 Nm   | 12 Nm   | 18 Nm   | 133 Nm  | 10.7 Nm  | 3 Nm   | 0.68 Nm  |
| Standard bores  |   |   |   |  |  |  |
| 2 to 30   | 3 to 22   | 3 to 16   | 3 to 16   | 3 to 20  | 6 to 20  | 4 & 5 (shafts)   |
| Temperature range   |   |   |   |  |  |  |
| -20 to +60°C  | -20 to +60°C  | -40 to +100°C   | -40 to +80°C  | -20 to +60°C   | -10 to +80°C (when operating)  | -20 to +60°C   |
| Electrically isolating  |   |   |   |  |  |  |
| Yes   | Yes   | Yes   | Yes   | Yes  | No   | See General Description above  |
| Connection  |   |   |   |  |  |  |
| Clamp or Set Screw  | Clamp or Set Screw  | Set Screw   | Clamp or Set Screw  | Set Screw, Bonding, or Cross-Pinning   | Clamp or Set Screw   | N/A  |
| Page 24 - 26  | Page 22 - 23  | Page 40   | Page 38 - 39  | Page 44 - 48   | Page 50 - 52   | Page 54  |

# Selecting Flexible Couplings

## Introduction to couplings

In the simplest of terms a coupling's purpose is to transfer rotational movement from one shaft to another. Reality is somewhat more complicated, though, as flexible shaft couplings have also to compensate for misalignment between two shafts. This ability must be balanced with the need to be pliable in the planes of misalignment while still having the torsional strength to carry out the coupling's main function. This is known as the Compliance mechanism where compliance is the capacity for allowing relative displacement.

Several factors should always be taken into consideration when looking to specify flexible shaft couplings. These are torsional stiffness, backlash, torque, life and attachment system. All of these have bearing on coupling selection.

## Selecting the ideal coupling

The choice of couplings available to today's engineers can be daunting, but follow our guidelines and you will arrive at the optimum coupling for your particular application.

- Does the coupling provide adequate misalignment protection?
- Can it transmit the required torque?
- Do I need axial motion or axial stiffness?
- Can it sustain the required speed of rotation?
- Will it fit within the available space envelope?
- Can it operate at the designated ambient temperature?
- Does it provide torsional stiffness required for positional accuracy?
- Does it provide electrical isolation between the shafts?
- Will it have the required life expectancy?



## 6 Service Factors

- Peak torque values quoted in the coupling performance tables apply to uniform load conditions at constant speed where there is no misalignment or axial displacement.
- The torque capacity of flexible couplings will reduce when acceleration is present, for example, in stop/start or reversing conditions.
- The more severe the acceleration, the greater reduction in torque capacity.
- Sliding couplings (Oldham and UniLat) are subject to a wear rate dependent on the number of cycles completed.

Peak torque must be greater than application torque x service factor

|                | Load         |            |           |          |                   | Duty (Hours/Day) |       |       |        |     |
|----------------|--------------|------------|-----------|----------|-------------------|------------------|-------|-------|--------|-----|
|                | Steady State | Stop/Start | Reversing | Shock    | Shock & Reversing | <1               | 1 - 2 | 3 - 5 | 6 - 12 | >12 |
| Huco Flex B    | 1.5          | 2.0        | 2.0       | 3.0      | 4.0               | -                | -     | -     | -      | -   |
| Huco Flex M    | 1.5          | 2.0        | 2.0       | 3.0      | 4.0               | -                | -     | -     | -      | -   |
| Huco Flex Ni   | 1.0          | 2.0        | 2.0       | 3.0      | 4.0               | -                | -     | -     | -      | -   |
| Huco Flex P    | 1.0          | 1.5        | 1.5       | 3.0      | 4.0               | -                | -     | -     | -      | -   |
| Huco Flex G    | 1.0          | 2.0        | 4.0       | 4.0      | 4.0               | -                | -     | -     | -      | -   |
| Huco MultiBeam | 1.0          | 1.5        | 2.0       | (Note 1) | (Note 1)          | -                | -     | -     | -      | -   |
| Huco S-Beam    | 1.0          | 1.5        | 2.0       | (Note 1) | (Note 1)          | -                | -     | -     | -      | -   |
| Huco TorqLink  | 1.0          | 1.5        | 2.0       | (Note 1) | (Note 1)          | -                | -     | -     | -      | -   |
| Huco Oldham    | -            | -          | -         | -        | -                 | 1.0              | 2.0   | 4.0   | 6.0    | 8.0 |
| Huco Flex - B  | -            | -          | -         | -        | -                 | 1.0              | 1.5   | 2.0   | 3.0    | 4.0 |
| Uni-Lat        | -            | -          | -         | -        | -                 | 1.0              | 1.5   | 2.0   | 3.0    | 4.0 |

Note 1: Not recommended in these conditions

# How to Order

All shaft mounted products in this catalogue can be specified with inch and/or metric bore diameters. A standard range of sizes is listed for each product. Where physical dimensions permit, keyways may be specified at extra cost.

For the sake of uniformity and avoidance of errors when ordering, bore diameters are designated with a 2-digit number which forms part of the order code.

Please note that only the bore diameters listed for each

product in the product pages are standard.

The table below lists the 2-digit designations for bore diameters spanning 1mm to 38mm and includes the metric equivalents for bores conforming to inch sizes. The columns at the right of the table show the key dimensions for the related bores. Designations for keywayed bores are shown in the last column.

To specify a **keywayed** bore, prefix the 2-digit

number with a 'P' for metric keyways or an 'R' for an inch keyway.

Standard keyways are machined to 2 specifications:

Bore codes prefixed 'P' denote a metric keyway conforming to ISO 773/774 (BS 4235 Pt. 1).

Bore codes prefixed 'R' denote an inch keyway conforming to BS 46 Pt. 1.

In most cases, keyways prefixed 'R' are compatible with AGMA 9002-A86 but can differ in the depth of the key seat. Shafts fitted with AGMA keys should be measured to determine dimension K and the key width. If these do not conform to the values shown in the table, please photocopy this page and enter the required dimensions on the drawing below. Please enter all three dimensions, key width, shaft diameter and dimension K.

## Round & Keywayed Bore Details & Codes

| Metric mm | Inch fraction | Inch decimal | Round bore code | Metric keys    |       | Inch keys      |        | Keywayed bore code |
|-----------|---------------|--------------|-----------------|----------------|-------|----------------|--------|--------------------|
|           |               |              |                 | Key size w x h | K     | Key size w x h | K      |                    |
| 1         | –             | 0.0394       | 08              | –              | –     | –              | –      | –                  |
| 1.588     | 1/16          | 0.0625       | 10              | –              | –     | –              | –      | –                  |
| 2         | –             | 0.0787       | 11              | –              | –     | –              | –      | –                  |
| 2.286     | –             | 0.0900       | 12              | –              | –     | –              | –      | –                  |
| 2.382     | 3/32          | 0.0938       | 13              | –              | –     | –              | –      | –                  |
| 3         | –             | 0.1181       | 14              | –              | –     | –              | –      | –                  |
| 3.048     | –             | 0.1200       | 15              | –              | –     | –              | –      | –                  |
| 3.175     | 1/8           | 0.1250       | 16              | –              | –     | –              | –      | –                  |
| *3.969    | 5/32          | 0.1563       | –               | –              | –     | –              | –      | –                  |
| 4         | –             | 0.1575       | 18              | –              | –     | –              | –      | –                  |
| 4.763     | 3/16          | 0.1875       | 19              | –              | –     | –              | –      | –                  |
| 5         | –             | 0.1969       | 20              | –              | –     | –              | –      | –                  |
| 5.556     | 7/32          | 0.2188       | 21              | –              | –     | –              | –      | –                  |
| 6         | –             | 0.2362       | 22              | –              | –     | –              | –      | –                  |
| 6.096     | –             | 0.2400       | 23              | –              | –     | –              | –      | –                  |
| 6.350     | 1/4           | 0.2500       | 24              | –              | –     | –              | –      | –                  |
| 7         | –             | 0.2756       | 25              | 2 x 2          | 8.00  | –              | –      | P25                |
| 7.144     | 9/32          | 0.2813       | 26              | –              | –     | –              | –      | –                  |
| 7.938     | 5/16          | 0.3125       | 27              | –              | –     | 1/8 x 1/8      | 0.3755 | R27                |
| 8         | –             | 0.3150       | 28              | 2 x 2          | 9.00  | –              | –      | P28                |
| 8.731     | 11/32         | 0.3438       | 29              | –              | –     | 1/8 x 1/8      | 0.4068 | R29                |
| 9         | –             | 0.3543       | 30              | 3 x 3          | 10.40 | –              | –      | P30                |
| 9.525     | 3/8           | 0.3750       | 31              | –              | –     | 1/8 x 1/8      | 0.4380 | R31                |
| 10        | –             | 0.3937       | 32              | 3 x 3          | 11.40 | –              | –      | P32                |
| 11        | –             | 0.4331       | 33              | 4 x 4          | 12.80 | –              | –      | P33                |
| 11.113    | 7/16          | 0.4375       | 34              | –              | –     | 1/8 x 1/8      | 0.5005 | R34                |
| 12        | –             | 0.4724       | 35              | 4 x 4          | 13.80 | –              | –      | P35                |
| 12.700    | 1/2           | 0.5000       | 36              | –              | –     | 1/8 x 1/8      | 0.5630 | R36                |
| 13        | –             | 0.5118       | 37              | 5 x 5          | 15.30 | –              | –      | P37                |
| 14        | –             | 0.5512       | 38              | 5 x 5          | 16.30 | –              | –      | P38                |
| 14.288    | 9/16          | 0.5625       | 39              | –              | –     | 3/16 x 3/16    | 0.6535 | R39                |
| 15        | –             | 0.5906       | 40              | 5 x 5          | 17.30 | –              | –      | P40                |
| 15.875    | 5/8           | 0.6250       | 41              | –              | –     | 3/16 x 3/16    | 0.7160 | R41                |
| 16        | –             | 0.6299       | 42              | 5 x 5          | 18.30 | –              | –      | P42                |
| 17        | –             | 0.6693       | 43              | 5 x 5          | 19.30 | –              | –      | P43                |
| 17.463    | 11/16         | 0.6875       | 44              | –              | –     | 3/16 x 3/16    | 0.7785 | R44                |
| 18        | –             | 0.7087       | 45              | 6 x 6          | 20.80 | –              | –      | P45                |
| 19        | –             | 0.7480       | 46              | 6 x 6          | 21.80 | –              | –      | P46                |
| 19.050    | 3/4           | 0.7500       | 47              | –              | –     | 3/16 x 3/16    | 0.8410 | R47                |
| 20        | –             | 0.7874       | 48              | 6 x 6          | 22.80 | –              | –      | P48                |
| 22        | –             | 0.8661       | 49              | 6 x 6          | 24.80 | –              | –      | P49                |
| 22.225    | 7/8           | 0.8750       | 50              | –              | –     | 1/4 x 1/4      | 0.9930 | R50                |
| 24        | –             | 0.9449       | 51              | 8 x 7          | 27.30 | –              | –      | P51                |
| 25        | –             | 0.9843       | 52              | 8 x 7          | 28.30 | –              | –      | P52                |
| 25.400    | 1             | 1.0000       | 53              | –              | –     | 1/4 x 1/4      | 1.1180 | R53                |
| 28        | –             | 1.1024       | 54              | 8 x 7          | 31.30 | –              | –      | P54                |
| 28.575    | 1-1/8         | 1.1250       | 55              | –              | –     | 5/16 x 1/4     | 1.2400 | R55                |
| 30        | –             | 1.1811       | 56              | 8 x 7          | 33.30 | –              | –      | P56                |
| 31.750    | 1-1/4         | 1.2500       | 57              | –              | –     | 5/16 x 1/4     | 1.3580 | R57                |
| 32        | –             | 1.2598       | 58              | 10 x 8         | 35.30 | –              | –      | P58                |
| 34.925    | 1-3/8         | 1.3750       | 59              | –              | –     | 3/8 x 1/4      | 1.4830 | R59                |
| 35        | –             | 1.3780       | 60              | 10 x 8         | 38.30 | –              | –      | P60                |
| 38        | –             | 1.4961       | 61              | 10 x 8         | 41.30 | –              | –      | P61                |

\*Not manufactured. Nearest alternative 4mm.

## Order Codes

Combine the COUPLING REF in Main Product Tables with BORE REFS in Standard Bores Table.

Please identify both bores e.g.

**706.19.1924**

Coupling ref.

Ø B1 ref.

Ø B2 ref.


# Installing Couplings

## Flexible Coupling Types


### General instructions

1. Ensure that shafts are free of burrs, damage, or foreign matter, and can penetrate the bores.
2. Install the coupling by holding the shaft and the related hub, rotating it back and forth as you progress it along the shaft.
3. Do not apply any forces that cause extension, compression or lateral displacement of the coupling beyond its permissible offsets.


### Normal installation



- a) Position and secure the larger of the 2 shafts (if different) and progress the coupling onto it.

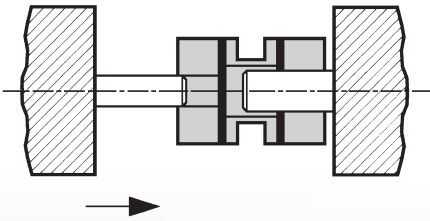


- b) Progress the second shaft into the bore, taking care not to lever either shaft against the inner wall of the spacer.

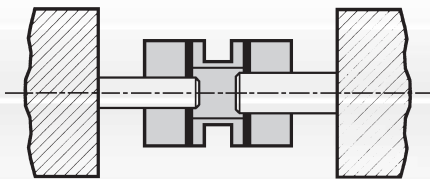


- c) Progress the coupling along the shafts to a position midway between the shaft terminations. Rotate the coupling to ensure it is not binding and is in its natural state, ie., neither extended nor compressed.
- d) Align the second shaft with the first using a straight edge and feeler gauges or a dial indicator.
- e) Secure the second shaft and re-check alignment. Final alignment must be within the permissible offsets.
- f) Secure one hub, tightening each screw alternately. Repeat for the second hub.

### When to use single & two-stage couplings

#### Single-stage



Example 1. With partially supported (1 bearing) shafts.



Example 2. With unsupported intermediate shafts.

Single-stage couplings are radially supportive and function as supplementary bearings. They are used when the connected shaft lacks a full complement of bearings.

#### Two-stage



Two-stage couplings are radially compliant and are used when both shafts are fully supported by bearings.

### CAUTION

These are precision high couplings that have a limited range of permissible flexure. They can be damaged through careless handling. Avoid gratuitous flexure in any direction.

No axial forces are permitted across the membranes when fitting Huco-Flex M couplings. Keyways with interference fits are not recommended.


Bellows couplings are more tolerant of axial motion, but flexure beyond the permissible limits should be avoided.

Note: Bellows couplings do not provide the same level of radial support as Flex M when used with partially or wholly unsupported shafts. When essential for reasons of greater axial motion, use the 3-convolution type for these purposes.


# Installing Couplings

## Sliding Disc type (Oldham)


### Blind hub

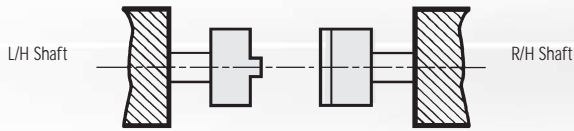

- Slide hubs on to both shafts until fully seated and tighten screws.
- Position and secure R/H shaft.

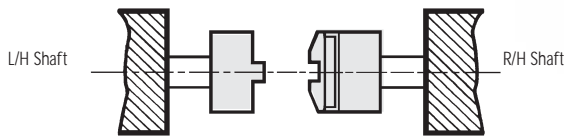

- Seat disc fully on R/H hub.

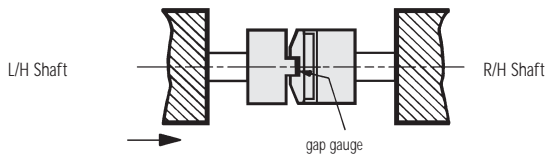

- Place a gap gauge flat against the bottom of the exposed slot in the disc and push the L/H hub into full engagement by manipulating the L/H shaft.
  - Align shafts within the permissible offsets and secure L/H shaft.
  - Check alignment and correct if necessary.
  - Remove gap gauge.
- To fit a new disc, withdraw L/H shaft complete with hub and remove old disc. Repeat steps c) to g).


### Gap gauges for all hub types

| Coupling size | Gap gauge |
|---------------|-----------|
| 06, 09 & 13   | 0.05mm    |
| 19 & 25       | 0.10mm    |
| 33 & 41       | 0.15mm    |
| 50 & 57       | 0.20mm    |

Clearances are set to allow for thermal shaft growth and / or end-float. Gaps may be increased, but total shaft movement should not exceed the values shown under *Axial Compensation* in the Performance Table.


### Radial support

Shafts must be fully supported by 2 bearings and have minimal overhang. Oldham couplings cannot be used in pairs.




Note: It is important that installed couplings are not end-loaded. To help avoid this, thro' bored hubs are recommended for shafts which have fixed axial locations such as face-mounted motors.


### Thro' hub

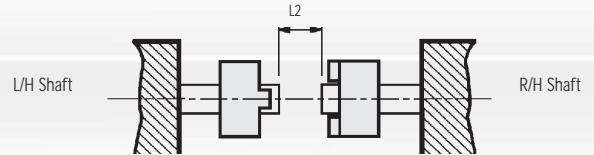

- Slide hubs on to both shafts.
- Align shafts to within the permissible offsets and position to leave *minimum* gap  $L_2$  between terminations. Secure both shafts, check alignment and correct if necessary.

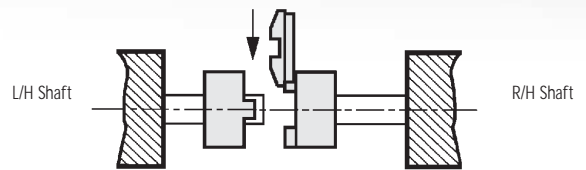

- Position R/H hub with inboard face flush with shaft termination and tighten screws.
- Slide disc radially on to the tenons of the R/H hub. Ensure the disc is fully seated.

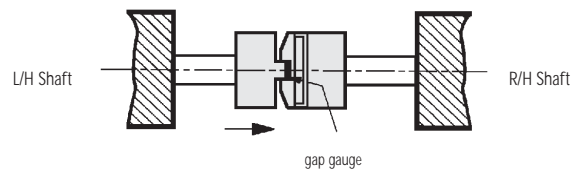

- Place a gap gauge flat against the bottom of the exposed slot in the disc and push the L/H hub into full engagement.
- Tighten fastening screws and remove gap gauge.

To fit a new disc, slacken the fastening screws on one hub and retract it along the shaft. Slide the old disc out radially and replace with the new. Repeat steps d) to f).

To retain shaft phasing, withdraw L/H shaft and repeat steps c) to g) as for Blind hub couplings.

Over-penetration of shafts can impair function of coupling with solid disc. Min shaft gap  $L_2$  must be observed. Specify thro' bored disc for near-butted shafts.

| Coupling size | 19  | 25  | 33    | 41   | 50   | 57   |
|---------------|-----|-----|-------|------|------|------|
| $L_2$ min     | 7.2 | 9.2 | 12.0* | 15.3 | 18.4 | 21.2 |

\*types 243, 245, 454 and 456 = 18.0

### Clamp hubs

To improve clamp action, apply a little grease under the head of the clamp screw.

# Installing Couplings

## Beam Type




### Relief Under The Beams

Most Multi-Beam couplings can be supplied with or without relief under the beams as shown in the diagrams below. When the drive or driven shafts extend under the beams relief is essential to ensure that the coupling remains flexible. Where non-relieved versions are used, shafts must not be allowed to penetrate under the beamed section of the coupling. Unless otherwise specified, relieved versions will be supplied.


### Pilot Bores

Couplings can be supplied 'pilot bored' for opening out by the customer. Pilot bores are plain drilled holes, which are not produced with the same accuracy as finished machined bores. The largest bore provided in a pilot bored product is that needed to make the coupling flexible and this will always be larger than the minimum possible bore size 'B1' shown in the bore tables. For sizes 13 to 25, the pilot bore is also larger than the 'B2' minimum shown in the bore tables. Further details are available on request.

### Non-Relieved



### Relieved



# high performance couplings


- Stainless Steel Bellows
- Nickel Bellows
- Flexible Membrane (Disc)

- Torsionally rigid design
- No moving parts
- All-metal construction
- Low inertia

The operating principles of Flex B, Flex Ni and Flex M offer the highest performance available with flexible couplings.


With excellent kinematic properties and torsional stiffness of a very high order, they are suitable for servo drives and satisfy the criteria for highly dynamic position and velocity control systems.

Bellows couplings have the greater torsional stiffness while Flex M have the more tolerant flexural system and feature dynamically balanced construction.







## Set screw hubs




Ref. 530  
Short type  
for precisely aligned shafts



Ref. 532  
Long type  
for greater angular offsets  
or axial motion




Ref. 534  
Stretched type  
for greater radial misalignment  
and lower bearing loads




Typical


## Clamp hubs




Ref. 536 & 537  
Short type  
for precisely aligned shafts



Ref. 538 & 539  
Long type  
for greater angular offsets  
or axial motion

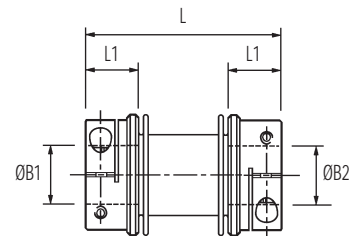

Ref. 540 & 541  
Stretched type  
for greater radial misalignment  
and lower bearing loads






Typical

12

## Comparative properties

The properties of the 3 types compared on a scale of 1 to 3. 3 = best.

| Parameter            | Short   | Long  | Stretched   |
|----------------------|---|---|---|
|                      |  |  |  |
| Peak Torque          | 2   | 1   | 3   |
| Torsional Stiffness  | 3   | 1   | 2   |
| Angular Compensation | 2   | 3   | 1   |
| Axial Compensation   | 2   | 3   | 1   |
| Radial Compensation  | 1   | 3   | 2   |

## Materials & Finishes

Hubs: Al. Alloy 2014T6 and AlEco 62sn T9 Clear anodised finish

Bellows: Spring quality stainless steel

Joint assembly: Copper C106, heat treated Zinc plate, clear passivate

Fasteners: Alloy steel, black oiled

## Temperature Range

-40°C to +120°C

# Flex - B Stainless Steel Bellows Couplings



## DIMENSIONS & ORDER CODES

| Coupling Size | Set Screw Hubs | Clamp Hubs | ØD   | L    | <sup>1</sup> L1 | ØB1, ØB2 max | Fasteners |                        |           | <sup>3</sup> Moment of inertia kgm <sup>2</sup> x 10 <sup>-8</sup> | <sup>3</sup> Mass kg x 10 <sup>-3</sup> |
|---------------|----------------|------------|------|------|-----------------|--------------|-----------|------------------------|-----------|--|---|
|               |                |            |      |      |                 |              | Screw     | <sup>2</sup> Torque Nm | Wrench mm |  |   |
| COUPLING REF  |                |            |      | ±1.0 |                 |              |           |                        |           |  |   |
| 20            | 530.20         | -          | 20.0 | 31.0 | 11.0            | 8            | M4        | 2.27                   | 2         | 90   | 18                                      |
|               | 532.20         | -          |      | 45.2 |                 |              |           |                        |           | 100  | 19                                      |
|               | 534.20         | -          |      | 43.6 |                 |              |           |                        |           | 90   | 18                                      |
|               | -              | 537.20     |      | 31.0 |                 |              |           |                        |           | 90   | 16                                      |
|               | -              | 539.20     |      | 45.2 |                 |              |           |                        |           | 100  | 18                                      |
|               | -              | 541.20     |      | 43.6 |                 |              |           |                        |           | 90   | 17                                      |
| 26            | 530.26         | -          | 26.0 | 37.5 | 14.0            | 12           | M5        | 4.62                   | 2.5       | 350  | 35                                      |
|               | 532.26         | -          |      | 54.3 |                 |              |           |                        |           | 400  | 39                                      |
|               | 534.26         | -          |      | 53.2 |                 |              |           |                        |           | 370  | 34                                      |
|               | -              | 536.26     |      | 37.5 |                 |              |           |                        |           | 330  | 34                                      |
|               | -              | 538.26     |      | 54.3 |                 |              |           |                        |           | 380  | 38                                      |
|               | -              | 540.26     |      | 53.2 |                 |              |           |                        |           | 350  | 33                                      |
| 34            | 530.34         | -          | 34.0 | 40.0 | 14.0            | 16           | M5        | 4.62                   | 2.5       | 975  | 58                                      |
|               | 532.34         | -          |      | 57.0 |                 |              |           |                        |           | 1128   | 65                                      |
|               | 534.34         | -          |      | 56.6 |                 |              |           |                        |           | 988  | 59                                      |
|               | -              | 536.34     |      | 40.0 |                 |              |           |                        |           | 925  | 56                                      |
|               | -              | 538.34     |      | 57.0 |                 |              |           |                        |           | 1078   | 63                                      |
|               | -              | 540.34     |      | 56.6 |                 |              |           |                        |           | 938  | 57                                      |
| 41            | 530.41         | -          | 41.0 | 49.7 | 18.0            | 20           | M6        | 7.61                   | 3         | 2490   | 102                                     |
|               | 532.41         | -          |      | 71.4 |                 |              |           |                        |           | 2740   | 110                                     |
|               | 534.41         | -          |      | 70.7 |                 |              |           |                        |           | 2477   | 102                                     |
|               | -              | 536.41     |      | 49.7 |                 |              |           |                        |           | 2390   | 99                                      |
|               | -              | 538.41     |      | 71.4 |                 |              |           |                        |           | 2660   | 107                                     |
|               | -              | 540.41     |      | 70.7 |                 |              |           |                        |           | 2377   | 99                                      |

### IMPORTANT

Load capacity depends on application conditions: see page 6 for details

## PERFORMANCE

| Coupling Size | Ref.      | <sup>4</sup> Peak torque Nm | <sup>5</sup> Max compensation |           |            | <sup>6</sup> Flexural stiffness |                 |               |              |
|---------------|-----------|-----------------------------|-------------------------------|-----------|------------|---------------------------------|-----------------|---------------|--------------|
|               |           |                             | Angular deg                   | Radial mm | Axial ± mm | Torsional Nm / rad              | Angular N / deg | Radial N / mm | Axial N / mm |
| 20            | 530 & 537 | 2.0                         | 2                             | 0.06      | 0.35       | 315                             | 1.03            | 115           | 17.7         |
|               | 532 & 539 | 1.0                         | 6                             | 0.50      | 1.00       | 170                             | 0.33            | 6.7           | 7.8          |
|               | 534 & 541 | 2.5                         | 1.3                           | 0.20      | 0.20       | 225                             | 0.33            | 8.2           | 7.1          |
| 26            | 530 & 536 | 3.2                         | 2                             | 0.06      | 0.36       | 755                             | 1.27            | 238           | 5.7          |
|               | 532 & 538 | 1.6                         | 6                             | 0.50      | 1.00       | 380                             | 0.39            | 8.2           | 3.3          |
|               | 534 & 540 | 4.0                         | 1.3                           | 0.20      | 0.20       | 615                             | 1.52            | 14.6          | 6.4          |
| 34            | 530 & 536 | 7.5                         | 2.5                           | 0.10      | 0.60       | 1740                            | 1.34            | 227           | 6.6          |
|               | 532 & 538 | 3.8                         | 8                             | 1.00      | 1.90       | 915                             | 0.62            | 12.7          | 3.8          |
|               | 534 & 540 | 9.4                         | 1.5                           | 0.30      | 0.30       | 1455                            | 1.98            | 23.2          | 27.9         |
| 41            | 530 & 536 | 10.0                        | 2.5                           | 0.15      | 0.80       | 2880                            | 1.58            | 144           | 13.1         |
|               | 532 & 538 | 5.0                         | 8                             | 1.20      | 2.50       | 1310                            | 0.52            | 9.3           | 3.8          |
|               | 534 & 540 | 12.5                        | 1.8                           | 0.40      | 0.50       | 2245                            | 2.30            | 19.2          | 7.2          |

- Length of supported thro' bore. Shafts can near-butt.
- Maximum recommended tightening torque.
- Values apply with max bores.
- Peak torque. Select a size where Peak Torque exceeds the application torque x service factor. (see page 6)
- Max. compensation values are mutually exclusive.
- Torsional stiffness values apply at 50% peak torque with no misalignment, measured shaft-to-shaft with largest standard bores. Note that in some vendors' catalogues the given torsional stiffness applied to the un-mounted bellows element only, an unrepresentative calculated value.




## STANDARD BORES

| Coupling Size              | ØB1, ØB2 +0.03/-0mm |       |    |       |     |    |       |     |    |       |     |    |    |        |    |    |        |     |    |    |        |     |
|----------------------------|---------------------|-------|----|-------|-----|----|-------|-----|----|-------|-----|----|----|--------|----|----|--------|-----|----|----|--------|-----|
|                            | 3                   | 3.175 | 4  | 4.763 | 5   | 6  | 6.350 | 8   | 9  | 9.525 | 10  | 11 | 12 | 12.700 | 14 | 15 | 15.875 | 16  | 18 | 19 | 19.050 | 20  |
| 20                         | ●                   | ●     | ●  | ●     | ●   | ●  | ●     |     |    |       |     |    |    |        |    |    |        |     |    |    |        |     |
| 26                         |                     |       | ●  | ●     | ●   | ●  | ●     | ●   | ●  | ●     | ●   | ●  | ●  |        |    |    |        |     |    |    |        |     |
| 34                         |                     |       |    |       |     | ●  | ●     | ●   | ●  | ●     | ●   | ●  | ●  | ●      | ●  | ●  | ●      | ●   | ●  |    |        |     |
| 41                         |                     |       |    |       |     |    | ●     | ●   | ●  | ●     | ●   | ●  | ●  | ●      | ●  | ●  | ●      | ●   | ●  | ●  | ●      | ●   |
| Bore ref.                  | 14                  | 16    | 18 | 19    | 20  | 22 | 24    | 28  | 30 | 31    | 32  | 33 | 35 | 36     | 38 | 40 | 41     | 42  | 45 | 46 | 47     | 48  |
| Corresponding bore adaptor |                     |       |    |       | 251 |    | 253   | 255 |    |       | 257 |    |    | 259    |    |    |        | 260 |    |    |        | 261 |



Diameters for which a bore adaptor is shown can be adapted to smaller shaft sizes. See page 56 for details of metallic and electrically insulating adaptors.



## Set Screw Hubs

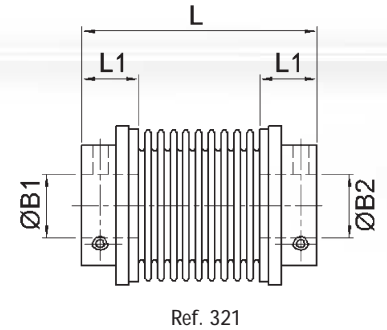

## Clamp Hubs

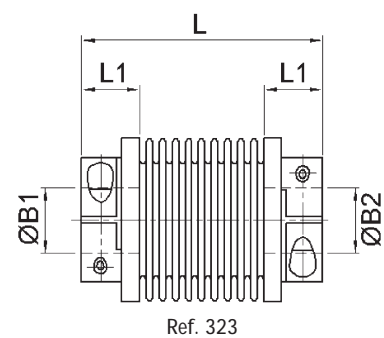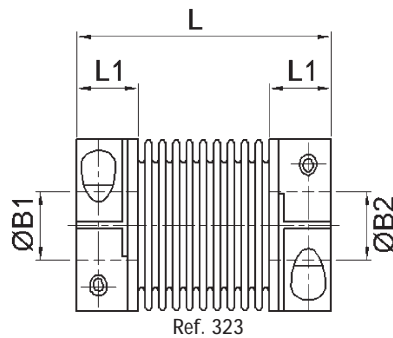

The convolutions of Flex-Ni Couplings are formed by the electrolytic deposition of nickel. This produces stress-free convolutions with closely controlled wall thickness.

Nickel bellows couplings are characterised by their exceptional quality of rotational positional integrity. This is achieved through high torsional stiffness in a coupling that is still able to accommodate large amounts of lateral and angular misalignment due to low spring rates in these directions. These couplings are used primarily in instrumentation and similar sensitive applications.

## Materials & Finishes

Hubs: Aluminium Alloy

Bellows: Electrodeposited nickel

Fasteners: Alloy steel

## Temperature Range

-50°C to +120°C



## DIMENSIONS & ORDER CODES

| Size | Number of convolutions | Order Code    |           | Dimensions |              |                    |           |   |                            | Fasteners |              |          |
|------|------------------------|---------------|-----------|------------|--------------|--------------------|-----------|---|----------------------------|-----------|--------------|----------|
|      |                        | Set Screw Hub | Clamp Hub | O.D        | O/A Length L | Max Shaft Depth L1 | Max Bores | Moment of Inertia kgm <sup>2</sup> x 10 <sup>-8</sup> | Mass kg x 10 <sup>-3</sup> | Size      | Torque (Ncm) | A/F (mm) |
| 7    | 8                      | 321.07        | -         | 6.35       | 14           | 4                  | 3.175     | 1.3   | 1.5                        | M2        | 41           | 0.9      |
| 12   | 14                     | 321.12        | -         | 12         | 23           | 6                  | 6.35      | 18.5  | 10                         | M2.5      | 79           | 1.3      |
| 17   | 14                     | 321.17        | -         | 17         | 27           | 7                  | 10        | 36.2  | 8.5                        | M3        | 132          | 1.5      |
|      |                        | -             | 323.17    | 16.3       | 29           | 8                  | 6.35      | 46.6  | 11.0                       | M2        | 35           | 1.5      |
| 25   | 10                     | 321.25        | -         | 25         | 33           | 7                  | 12.7      | 161.0   | 19.5                       | M3        | 132          | 1.5      |
|      |                        | -             | 323.25    | 25         | 37           | 9                  | 12.7      | 245.0   | 28.5                       | M2.5      | 66           | 2.0      |
| 36   | 7                      | 321.36        | -         | 36.3       | 42.3         | 9.5                | 19.05     | 601.0   | 39.0                       | M6        | 510          | 3.0      |
|      |                        | -             | 323.36    | 36.3       | 46.9         | 11.8               | 19.05     | 2960.0  | 85.0                       | M4        | 262          | 3.0      |
| 50   | 11                     | 321.50        | -         | 51         | 59.3         | 10.5               | 20        | 952.0   | 52.0                       | M6        | 860          | 3.0      |
|      |                        | -             | 323.50    | 51         | 61.9         | 11.8               | 20        | 3560.0  | 105.0                      | M4        | 262          | 3.0      |

## PERFORMANCE

| Size | Peak Torque (Ncm) | Wind up Arcs/Ncm | Max misalignment compensation |           |          | Nominal Spring Rates |                 |               |              |
|------|-------------------|------------------|-------------------------------|-----------|----------|----------------------|-----------------|---------------|--------------|
|      |                   |                  | Angular Deg                   | Radial mm | Axial mm | Torsional (Nm/rad)   | Angular (N/deg) | Radial (N/mm) | Axial (N/mm) |
| 7    | 4.9               | 285              | 10                            | 0.19      | 0.65     | 7                    | <0.15           | 6.9           | 3.5          |
| 12   | 13                | 75               | 15                            | 0.54      | 1.72     | 27                   | <0.15           | 4.2           | 2.2          |
| 17   | 50                | 20               | 10                            | 0.43      | 1.78     | 103                  | 0.15            | 12.3          | 4.0          |
| 25   | 328               | 4.0              | 8                             | 0.46      | 2.07     | 515                  | 0.41            | 38.1          | 11.2         |
| 36   | 918               | 1.2              | 6                             | 0.46      | 3.28     | 1719                 | 0.32            | 87.8          | 20.2         |
| 50   | 1624              | 0.6              | 9                             | 1.12      | 6.1      | 3438                 | <0.15           | 57.8          | 17.6         |

## AVAILABLE BORES

| Size      | Ø B1, B2 H8 |       |    |       |    |    |       |    |       |    |    |        |    |        |    |  |
|-----------|-------------|-------|----|-------|----|----|-------|----|-------|----|----|--------|----|--------|----|--|
|           | 3           | 3.175 | 4  | 4.763 | 5  | 6  | 6.350 | 8  | 9.525 | 10 | 12 | 12.700 | 16 | 19.050 | 20 |  |
| 7         | •           | •     | •  |       |    |    |       |    |       |    |    |        |    |        |    |  |
| 12        | •           | •     | •  | •     | •  | •  | •     |    |       |    |    |        |    |        |    |  |
| 17        | •           | •     | •  | •     | •  | •  | •     | S  | S     | S  |    |        |    |        |    |  |
| 25        |             |       |    |       |    | •  | •     | •  | •     | •  | •  | •      |    |        |    |  |
| 36        |             |       |    |       |    |    |       |    |       | •  | •  | •      | •  |        |    |  |
| 50        |             |       |    |       |    |    |       |    |       |    | •  | •      | •  | •      | •  |  |
| Bore Ref. | 14          | 16    | 18 | 19    | 20 | 22 | 24    | 28 | 31    | 32 | 35 | 36     | 42 | 47     | 48 |  |


S = Setscrew only

### IMPORTANT


Load capacity depends on application conditions: see page 6 for details




## Set screw hubs




**Ref. 460**  
for use in pairs or with floating shafts



**Ref. 464**  
for precisely aligned shafts




**Ref. 468**  
for greater radial misalignment and lower bearing loads




Typical


## Clamp hubs




**Ref. 462**  
for use in pairs or with floating shafts



**Ref. 466**  
for precisely aligned shafts




**Ref. 470**  
for greater radial misalignment and lower bearing loads



Typical

16

## Drive shafts

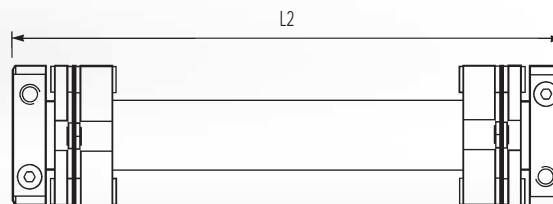

Unless specified otherwise, drive shafts are supplied with set screw hubs inboard.

Drive shafts are supplied to order.

Please specify:

- Coupling size
- Hub style and bore diameter at each end
- Keyway details
- Overall length L2
- Minimum torsional stiffness, if critical
- Quantity

## Materials & Finishes

Hubs & spacer: Al. Alloy 7020T6  
Clear anodised finish

Membranes: Spring quality stainless steel  
Heat treated

Rivet assembly: Brass rivets flanked by formed steel washers  
Steel, zinc plate & colour passivate

Fasteners: Alloy steel, black oiled

## Temperature Range

-40°C to +120°C

# Flex - M Flexible Membrane Couplings - Rivetted Series



## DIMENSIONS & ORDER CODES

| Coupling Size | Set Screw Hubs | Clamp Hubs | ØD   | L    | ① L1 | ØB1, ØB2 max | ØB3  | Fasteners |             |           | ④ Moment of inertia kgm <sup>2</sup> x 10 <sup>-8</sup> | ④ Mass kg x 10 <sup>-3</sup> |
|---------------|----------------|------------|------|------|------|--------------|------|-----------|-------------|-----------|---|------------------------------|
|               |                |            |      |      |      |              |      | Screw     | ③ Torque Nm | Wrench mm |   |                              |
| COUPLING REF  |                |            |      |      |      |              |      |           |             |           |   |                              |
| 19            | 460.19         | -          | 19.2 | 13.0 | 5.6  | 6.35         | N/A  | M3        | 0.94        | 1.5       | 30  | 7                            |
|               | 464.19         | -          |      | 19.6 |      |              | 7.3  |           |             |           | 50  | 10                           |
|               | 468.19         | -          |      | 27.3 |      |              | N/A  |           |             |           | 60  | 12                           |
|               | -              | 462.19     |      | 20.2 | 7.3  |              | 40   | 9         |             |           |   |                              |
|               | -              | 466.19     |      | 26.8 | M2.5 |              | 1.32 | 2         | 60          | 13        |   |                              |
|               | -              | 470.19     |      | 34.5 | N/A  |              | 60   | 14        |             |           |   |                              |
| 26            | 460.26         | -          | 25.6 | 15.8 | 6.9  | 10           | N/A  | M4        | 2.27        | 2         | 120   | 15                           |
|               | 464.26         | -          |      | 22.4 |      |              | 11.0 |           |             |           | 160   | 18                           |
|               | 468.26         | -          |      | 30.1 |      |              | N/A  |           |             |           | 200   | 23                           |
|               | -              | 462.26     |      | 21.8 | 11.0 |              | 130  | 16        |             |           |   |                              |
|               | -              | 466.26     |      | 28.4 | M2.5 |              | 1.32 | 2         | 160         | 20        |   |                              |
|               | -              | 470.26     |      | 36.1 | N/A  |              | 210  | 25        |             |           |   |                              |
| 33            | 460.33         | -          | 33.5 | 22.5 | 10.0 | 12.7         | N/A  | M5        | 4.62        | 2.5       | 560   | 37                           |
|               | 464.33         | -          |      | 32.1 |      |              | 14.1 |           |             |           | 800   | 52                           |
|               | 468.33         | -          |      | 42.8 |      |              | N/A  |           |             |           | 830   | 55                           |
|               | -              | 462.33     |      | 30.5 | 14.1 |              | 520  | 37        |             |           |   |                              |
|               | -              | 466.33     |      | 40.1 | M3   |              | 2.43 | 2.5       | 730         | 51        |   |                              |
|               | -              | 470.33     |      | 50.8 | N/A  |              | 760  | 55        |             |           |   |                              |
| 41            | 460.41         | -          | 41.5 | 27.1 | 12.0 | 16           | N/A  | M6        | 7.61        | 3         | 1540  | 69                           |
|               | 464.41         | -          |      | 38.5 |      |              | 17.5 |           |             |           | 2250  | 97                           |
|               | 468.41         | -          |      | 50.1 |      |              | N/A  |           |             |           | 2450  | 107                          |
|               | -              | 462.41     |      | 37.1 | 17.5 |              | 1530 | 72        |             |           |   |                              |
|               | -              | 466.41     |      | 48.5 | M4   |              | 5.66 | 3         | 2220        | 100       |   |                              |
|               | -              | 470.41     |      | 60.1 | N/A  |              | 2370 | 109       |             |           |   |                              |

### IMPORTANT

Load capacity depends on application conditions: see page 6 for details

## PERFORMANCE

| Coupling Size | Ref.      | ⑤ Peak torque Nm | ⑦ Max compensation |           |            | ⑦ Flexural stiffness |                 |               |              |
|---------------|-----------|------------------|--------------------|-----------|------------|----------------------|-----------------|---------------|--------------|
|               |           |                  | Angular deg        | Radial mm | Axial ± mm | Torsional Nm / rad   | Angular N / deg | Radial N / mm | Axial N / mm |
| 19            | 460 & 462 | 0.9              | 2                  | 0         | 0.1        | 220                  | 0.4             | -             | -            |
|               | 464 & 466 |                  | 4                  | 0.2       | 0.2        | 150                  | 0.25            | 14            | < 7          |
|               | 468 & 470 |                  | 4                  | 0.4       | 0.2        | 145                  | 0.3             | 4             | -            |
| 26            | 460 & 462 | 2.3              | 2                  | 0         | 0.1        | 585                  | 0.75            | -             | -            |
|               | 464 & 466 |                  | 4                  | 0.2       | 0.2        | 385                  | 0.5             | 37            | < 7          |
|               | 468 & 470 |                  | 4                  | 0.4       | 0.2        | 400                  | 0.4             | 7             | -            |
| 33            | 460 & 462 | 5.6              | 1.5                | 0         | 0.1        | 1560                 | 2               | -             | -            |
|               | 464 & 466 |                  | 3                  | 0.2       | 0.2        | 935                  | 1               | 48            | < 8          |
|               | 468 & 470 |                  | 3                  | 0.4       | 0.2        | 980                  | 1.2             | 13            | -            |
| 41            | 460 & 462 | 11.3             | 1                  | 0         | 0.1        | 2710                 | 4               | -             | -            |
|               | 464 & 466 |                  | 2                  | 0.2       | 0.2        | 1980                 | 2               | 100           | < 8          |
|               | 468 & 470 |                  | 2                  | 0.4       | 0.2        | 2020                 | 2               | 25            | -            |

- ① Length of supported thro' bore.
- ② Clearance bore thro' spacer.
- ③ Maximum recommended tightening torque.
- ④ Values apply with max bores.
- ⑤ Peak torque. Select a size where Peak Torque exceeds the application torque x service factor. (see page 6)
- ⑥ Max. compensation values are mutually exclusive.
- ⑦ Torsional stiffness values apply at 50% peak torque with no misalignment, measured shaft-to-shaft with largest standard bores.  
Note that in some vendors' catalogues the given torsional stiffness applies to the membrane stack only, giving rise to a greater value.


## STANDARD BORES

| Coupling Size              | ØB1, ØB2 +0.03/-0mm |       |    |       |     |    |       |     |    |       |     |    |    |        |    |    |        |    |     |
|----------------------------|---------------------|-------|----|-------|-----|----|-------|-----|----|-------|-----|----|----|--------|----|----|--------|----|-----|
|                            | 3                   | 3.175 | 4  | 4.763 | 5   | 6  | 6.350 | 8   | 9  | 9.525 | 10  | 11 | 12 | 12.700 | 14 | 15 | 15.875 | 16 |     |
| 19                         | ●                   | ●     | ●  | ●     | ●   | ●  | ●     |     |    |       |     |    |    |        |    |    |        |    |     |
| 26                         |                     |       | ●  | ●     | ●   | ●  | ●     | ●   | ●  | ●     | ●   |    |    |        |    |    |        |    |     |
| 33                         |                     |       |    |       |     | ●  | ●     | ●   | ●  | ●     | ●   | ●  | ●  | ●      |    |    |        |    |     |
| 41                         |                     |       |    |       |     |    | ●     | ●   | ●  | ●     | ●   | ●  | ●  | ●      | ●  | ●  | ●      | ●  | ●   |
| Bore ref.                  | 14                  | 16    | 18 | 19    | 20  | 22 | 24    | 28  | 30 | 31    | 32  | 33 | 35 | 36     | 38 | 40 | 41     | 42 |     |
| Corresponding bore adaptor |                     |       |    |       | 251 |    | 253   | 255 |    |       | 257 |    |    | 259    |    |    |        |    | 260 |


Diameters for which a bore adaptor is shown can be adapted to smaller shaft sizes. See page 56 for details of metallic and electrically insulating adaptors.



## Set screw hubs

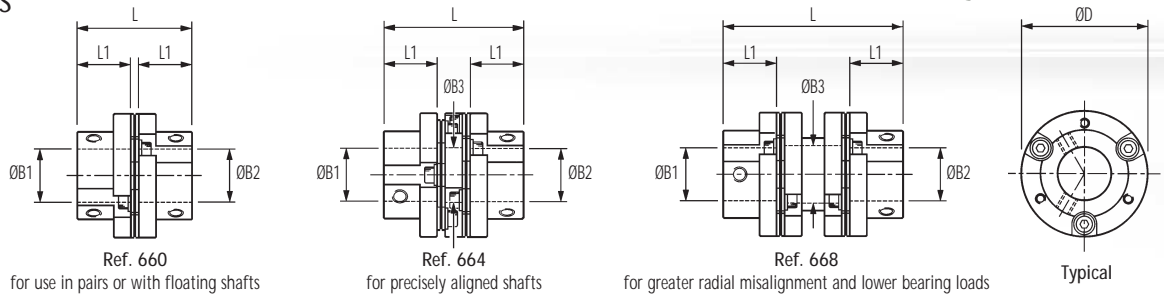


## Clamp hubs

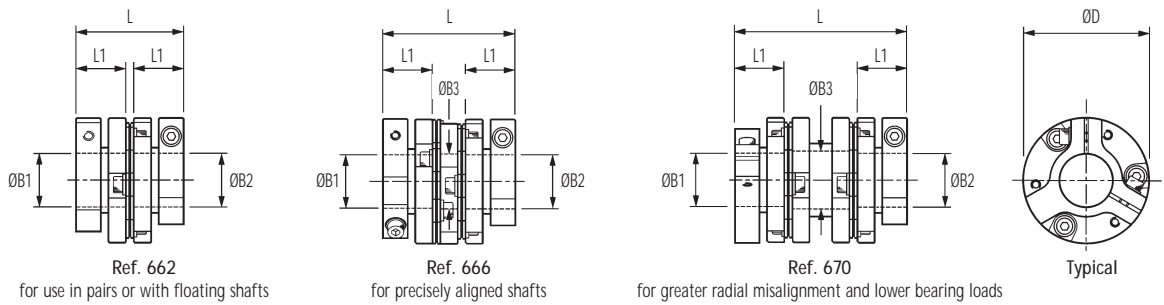

## Drive shafts

Unless specified otherwise, drive shafts are supplied with set screw hubs inboard and/or bonded to link shaft.

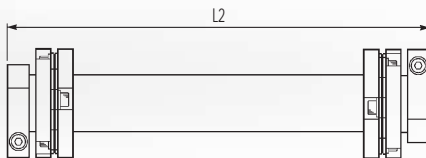

Drive shafts are supplied to order.

Please specify: • Coupling size • Hub style and bore diameter at each end • Keyway details • Overall length L2 • Minimum torsional stiffness, if critical • Quantity

## Materials & Finishes

Hubs & spacer: Al. Alloy 2014A T6 or AIECO 62 Sn T9  
BS 4300/5 FC1  
Clear anodised finish

Membranes: Spring quality stainless steel  
Heat treated

Bolt assembly: Bolt, alloy steel, black oiled finish  
Bush assembly, steel, zinc plate & black chromate  
Safety washer, carbon steel, black/brown oiled finish

Fasteners: Alloy steel, black oiled

## Temperature Range

-40°C to +120°C

# Flex - M Flexible Membrane Couplings - Bolted Series



## DIMENSIONS & ORDER CODES

| Coupling Size | Set Screw Hubs | Clamp Hubs | ØD   | L    | L1   | ØB1, ØB2 max | ØB3  | Fasteners |           |           | Moment of inertia kgm <sup>2</sup> x 10 <sup>-8</sup> | Mass kg x 10 <sup>-3</sup> |      |     |
|---------------|----------------|------------|------|------|------|--------------|------|-----------|-----------|-----------|---|----------------------------|------|-----|
|               |                |            |      |      |      |              |      | Screw     | Torque Nm | Wrench mm |   |                            |      |     |
| COUPLING REF  |                |            |      |      |      |              |      |           |           |           |   |                            |      |     |
| 41            | 660.41         | =          | 41.5 | 36.9 | 17.1 | 16           | N/A  | M6        | 7.60      | 3         | 1160  | 63                         |      |     |
|               | 664.41         | -          |      | 47.9 |      |              | 16.8 |           |           |           | 1680  | 90                         |      |     |
|               | 668.41         | -          |      | 59.7 |      |              | 17.5 |           |           |           | 1790  | 101                        |      |     |
|               | -              | 662.41     |      | 36.9 |      |              | N/A  |           |           |           | 1400  | 74                         |      |     |
|               | -              | 666.41     |      | 47.9 |      |              | 16.8 |           |           |           | 2010  | 101                        |      |     |
|               | -              | 670.41     |      | 59.7 |      |              | 17.5 |           |           |           | 2250  | 112                        |      |     |
| 52            | 660.52         | -          | 52.0 | 44.2 | 20.0 | 20           | N/A  | M6        | 7.60      | 3         | 3740  | 124                        |      |     |
|               | 664.52         | -          |      | 55.0 |      |              | 22.0 |           |           |           | 5490  | 168                        |      |     |
|               | 668.52         | -          |      | 72.4 |      |              | N/A  |           |           |           | 6840  | 208                        |      |     |
|               | -              | 662.52     |      | 50.0 |      |              | 22.0 |           |           |           | 5660  | 164                        |      |     |
|               | -              | 666.52     |      | 60.8 |      |              | M5   |           |           |           | 11.4  | 4                          | 7470 | 208 |
|               | -              | 670.52     |      | 78.1 |      |              | 22.0 |           |           |           | 8870  | 247                        |      |     |
| 66            | 660.66         | -          | 66.0 | 60.4 | 28.0 | 28           | N/A  | M8        | 18.3      | 4         | 13370   | 272                        |      |     |
|               | 664.66         | -          |      | 73.6 |      |              | 28.7 |           |           |           | 18040   | 360                        |      |     |
|               | 668.66         | -          |      | 94.7 |      |              | 30.2 |           |           |           | 23400   | 447                        |      |     |
|               | -              | 662.66     |      | 56.4 |      |              | N/A  |           |           |           | 14200   | 269                        |      |     |
|               | -              | 666.66     |      | 69.6 |      |              | 28.7 |           |           |           | 19300   | 357                        |      |     |
|               | -              | 670.66     |      | 90.7 |      |              | 30.2 |           |           |           | 24320   | 444                        |      |     |

### IMPORTANT

Load capacity depends on application conditions: see page 6 for details

## PERFORMANCE

| Coupling Size | Ref.      | Peak torque Nm | Max compensation |           |            | Flexural stiffness                   |                 |               |              |
|---------------|-----------|----------------|------------------|-----------|------------|--------------------------------------|-----------------|---------------|--------------|
|               |           |                | Angular deg      | Radial mm | Axial ± mm | Torsional Nm / rad x 10 <sup>3</sup> | Angular N / deg | Radial N / mm | Axial N / mm |
| 41            | 660 & 662 | 11.3           | 1                | 0         | 0.1        | 4.0                                  | 3.7             | -             |              |
|               | 664 & 666 |                | 2                | 0.2       | 0.2        | 2.8                                  | 1.6             | 97            | < 8          |
|               | 668 & 670 |                | 2                | 0.4       | 0.2        | 2.6                                  | 1.6             | 23            |              |
| 52            | 660 & 662 | 30             | 1                | 0         | 0.1        | 7.5                                  | 10.0            | -             |              |
|               | 664 & 666 |                | 2                | 0.2       | 0.2        | 4.8                                  | 5.0             | 313           | < 9          |
|               | 668 & 670 |                | 2                | 0.4       | 0.2        | 4.8                                  | 5.0             | 57            |              |
| 66            | 660 & 662 | 60             | 1                | 0         | 0.1        | 19.0                                 | 84.0            | -             |              |
|               | 664 & 666 |                | 2                | 0.2       | 0.2        | 12.0                                 | 23.0            | 379           | < 9          |
|               | 668 & 670 |                | 2                | 0.4       | 0.2        | 12.0                                 | 23.0            | 93            |              |

- ① Length of supported thro' bore.
- ② Clearance bore thro' spacer.
- ③ Maximum recommended tightening torque.
- ④ Values apply with max bores.
- ⑤ Peak torque. Select a size where Peak Torque exceeds the application torque x service factor. (see page 6)
- ⑥ Max. compensation values are mutually exclusive.
- ⑦ Torsional stiffness values apply at 50% peak torque with no misalignment, measured shaft-to-shaft with largest standard bores. Note that in some vendors' catalogues the given torsional stiffness applies to the membrane stack only, giving rise to a greater value.

Note that the drawings on the facing page represent Size 66 which employ 6-bolt membrane attachment and have 3-lobed clamp hubs. Sizes 41 & 52 employ 4-bolts and have clamp hubs similar to those of the rivetted series

## STANDARD BORES<sup>8</sup>

| Coupling Size              | ØB1, ØB2 +0.03/-0mm |     |    |       |     |    |    |        |    |    |        |     |    |    |        |     |    |    |        |     |
|----------------------------|---------------------|-----|----|-------|-----|----|----|--------|----|----|--------|-----|----|----|--------|-----|----|----|--------|-----|
|                            | 6.350               | 8   | 9  | 9.525 | 10  | 11 | 12 | 12.700 | 14 | 15 | 15.875 | 16  | 18 | 19 | 19.050 | 20  | 24 | 25 | 25.400 | 28  |
| 41                         | ●                   | ●   | ●  | ●     | ●   | ●  | ●  | ●      | ●  | ●  | ●      | ●   |    |    |        |     |    |    |        |     |
| 52                         |                     | ●   | ●  | ●     | ●   | ●  | ●  | ●      | ●  | ●  | ●      | ●   | ●  | ●  | ●      | ●   |    |    |        |     |
| 66                         |                     |     |    |       |     |    | ●  | ●      | ●  | ●  | ●      | ●   | ●  | ●  | ●      | ●   | ●  | ●  | ●      | ●   |
| Bore ref.                  | 24                  | 28  | 30 | 31    | 32  | 33 | 35 | 36     | 38 | 40 | 41     | 42  | 45 | 46 | 47     | 48  | 51 | 52 | 53     | 54  |
| Corresponding bore adaptor | 253                 | 255 |    |       | 257 |    |    | 259    |    |    |        | 260 |    |    |        | 261 |    |    | 262    | 263 |

Diameters for which a bore adaptor is shown can be adapted to smaller shaft sizes. See page 56 for details of metallic and electrically insulating adaptors.

---

## You can now...

Download or order catalogues

•  
Download our *Designer's Guide to Precision Shaft Couplings*

•  
Find a distributor in your area

•  
Read the latest product news

•  
Browse detailed information on all Huco products

•  
Search for products by order code or keyword



@

[www.huco.com](http://www.huco.com)

# general purpose motion control couplings

- Universal Lateral (Uni-Lat)
- Sliding Disc (Oldham)

- Backlash-free up to  $10^8$  turns
- Can tolerate large misalignments
- Slight damping characteristics
- Flex-free mechanical action
  - non-progressive bearing loads
- Non-magnetic (with special screws)
- Electrically isolating
- Low inertia

Uni-Lats are widely used for pulse generator drives while Oldhams are very popular for stepper driven positioning stages.

A unique property of Uni-Lats is resistance to axial motion. This makes them suitable for light push/pull duties and for anchoring axially unrestricted shafts.

Oldhams are 3-part couplings consisting of 2 hubs + 1 torque disc. The hubs determine the method of installation and shaft attachment, the discs determine the quality of motion.


The 4 hub styles and 2 disc materials that comprise the range are fully interchangeable within each of the 9 sizes available. To take advantage of this flexibility, hubs and discs are specified and supplied separately.

The discs are the sacrificial elements and are replaceable at low cost in the event of wear or breakage.







## Set screw hubs



Ref. 201  
Small bores




Ref. 203  
Large bores




Ref. 221 (not listed in main table).  
Combines large & small bores.  
See explanatory note on facing page

| Coupling ref. 221 |      |
|-------------------|------|
| Size              | L    |
| 18                | 16.7 |
| 27                | 22.3 |
| 34                | 28.0 |
| 41                | 33.3 |


## Clamp hubs



Ref. 207  
Collet hub & ring clamp




Ref. 205, 206  
Integral leaf clamp



Typical


22

## Installation




right

Up to 10° angular offset,  
depending on type



right

Up to 1mm radial offset for  
extreme misalignments



wrong

Standard Uni-Lats cannot be used in pairs.  
Special versions are available for use in this mode.  
Please enquire.

## Materials & Finishes

Hub sizes 18 & 27: Brass BS 2874 CZ121

Hub sizes 34 & 41: Al. Alloy AIECO 62Sn T9  
Irridite NCP

Fasteners: Alloy steel, black oiled

Clamp rings (sizes 18 & 27):  
Al. Alloy AIECO 62Sn T9  
Irridite NCP

Torque rings, all sizes: Acetal (black)

## Temperature Range

-20°C to +60°C

# Uni-Lat Universal / Lateral Offset Couplings



## DIMENSIONS & ORDER CODES

| Coupling Size | Set Screw Hubs | Clamp Hubs   | ØD   | L    | L1   | L2   | ØB1, ØB2 max | Fasteners |           |           | Moment of inertia kgm <sup>2</sup> x 10 <sup>-8</sup> | Mass kg x 10 <sup>-3</sup> |
|---------------|----------------|--------------|------|------|------|------|--------------|-----------|-----------|-----------|---|----------------------------|
|               |                |              |      |      |      |      |              | Screw     | Torque Nm | Wrench mm |   |                            |
| COUPLING REF  |                |              |      |      |      |      |              |           |           |           |   |                            |
| 18            | 201.18         | -            | 18.0 | 14.2 | 4.6  |      | 5            | M3        | 0.94      | 1.5       | 20  | 7                          |
|               | 203.18         | -            | 19.1 | 19.1 | 7.0  | 5.1  | 6.35         | 4-40      | 2.33      | 2.0       | 55  | 11                         |
|               | -              | 207.18 ‡ 219 | 19.1 | 19.1 | 6.1  |      |              | 8         | M3        | 0.94      | 1.5   | 91                         |
| 27            | 201.27         | -            | 28.0 | 25.4 | 9.3  | 6.9  | 10           | M3        | 2.43      | 2.5       | 220   | 26                         |
|               | 203.27         | -            | 28.0 | 25.4 | 9.3  | 6.9  | 10           | M3        | 2.43      | 2.5       | 220   | 26                         |
|               | -              | 207.27 ‡ 218 | 28.0 | 25.4 | 9.3  | 6.9  | 10           | M3        | 2.43      | 2.5       | 220   | 26                         |
| 34            | 201.34         | -            | 33.7 | 30.7 | 10.9 | 8.9  | 12.7         | M4        | 2.27      | 2.0       | 165   | 17                         |
|               | 203.34         | -            | 33.7 | 30.7 | 10.9 | 8.9  | 12.7         | M4        | 2.27      | 2.0       | 165   | 17                         |
|               | -              | 206.34       | 33.7 | 30.7 | 10.9 | 8.9  | 10           | 4-40      | 2.33      | 2.0       | 183   | 20                         |
| 41            | 201.41         | -            | 41.4 | 38.1 | 13.5 | 11.2 | 12.7         | M4        | 5.66      | 3.0       | 550   | 40                         |
|               | 203.41         | -            | 41.4 | 38.1 | 13.5 | 11.2 | 16           | M5        | 4.62      | 2.5       | 476   | 30                         |
|               | -              | 205.41       | 41.4 | 38.1 | 13.5 | 11.2 | 12.7         | M4        | 5.66      | 3.0       | 550   | 40                         |
| 70            | 203.70         | -            | 69.0 | 74.0 | 28.5 | 17.0 | 22           | M6        | 7.60      | 3.0       | 7315  | 189                        |
|               | -              | 205.70       | 69.0 | 74.0 | 28.5 | 17.0 | 22           | M6        | 19.3      | 5.0       | 7315  | 189                        |

- ① Length of supported thro' bore. Shafts must not penetrate beyond L1 when in operation.
- ② Nominal distance between shafts inserted to L1.
- ③ Maximum recommended tightening torque.
- ④ Values apply with max bores.
- ⑤ *Peak torque.* Select a size where Peak Torque exceeds the application torque x service factor. (see page 6)
- ⑥ Couplings can provide up to 1mm radial and 10° angular compensation (5° for ref. 207) when required. Observe given values for maximum backlash-free life. Electrical isolation between shafts > 3kV for all models when offset ≤5°.
- ⑦ Values apply at 50% peak torque with no misalignment, measured shaft-to-shaft with largest standard bores.
- ⑧ Momentary values.
- ‡ Ref. 207 only. Insert both bore codes in place of ‡.

## PERFORMANCE AT 20°C

| Coupling Size | Peak torque Nm | Max compensation @ 3000 r.p.m. |           | Torsional     |                    |                | Axial            |      | Static break torque Nm |
|---------------|----------------|--------------------------------|-----------|---------------|--------------------|----------------|------------------|------|------------------------|
|               |                | Angular deg                    | Radial mm | Rate deg / Nm | Stiffness Nm / rad | Max loading ±N | Stiffness N / mm |      |                        |
| 18            | 0.3            | 2                              | 0.2       | 2.3           | 25                 | 19             | 155              | 0.9  |                        |
| 27            | 1.7            |                                | 0.2       | 0.6           | 92                 | 31             | 350              | 5.0  |                        |
| 34            | 2.5            |                                | 0.25      | 0.4           | 146                | 34             | 300              | 7.5  |                        |
| 41            | 3.5            |                                | 0.25      | 0.19          | 299                | 39             | 250              | 10.5 |                        |
| 70            | 12.0           |                                | 0.25      | 0.19          | 1300               | 75             | 540              | 68   |                        |

### Coupling ref. 221

By specifying ref. 221 (not listed in tables, see diagram facing page) you can combine the bores coded for ref. 201 with those coded for ref. 203,

eg., 221.27.2432 specifies Size 27 with Ø6.35 x 10 bores.

## IMPORTANT

Load capacity depends on application conditions: see page 6 for details

## STANDARD BORES


| Coupling                   |        | ØB1, ØB2 +0.03/-0mm |       |    |       |     |    |       |       |      |       |     |    |        |    |        |     |    |    |       |    |     |
|----------------------------|--------|---------------------|-------|----|-------|-----|----|-------|-------|------|-------|-----|----|--------|----|--------|-----|----|----|-------|----|-----|
| size                       | ref.   | 3                   | 3.175 | 4  | 4.763 | 5   | 6  | 6.350 | 7.938 | 8    | 9.525 | 10  | 12 | 12.700 | 14 | 15.875 | 16  | 18 | 19 | 19.05 | 20 |     |
| 18                         | 201.18 | ●                   | ●     | ●  | ●     | ●   |    |       |       |      |       |     |    |        |    |        |     |    |    |       |    |     |
|                            | 203.18 |                     |       |    |       |     | ●  | ●     |       |      |       |     |    |        |    |        |     |    |    |       |    |     |
|                            | 207.18 | ●                   | ●     | ●  | ●     | ●   | ●  | ●     |       |      |       |     |    |        |    |        |     |    |    |       |    |     |
| 27                         | 201.27 | ●                   | ●     | ●  | ●     | ●   | ●  | ●     | ●     | *    | ●     |     |    |        |    |        |     |    |    |       |    |     |
|                            | 203.27 |                     |       |    |       |     |    |       |       |      | ●     | ●   |    |        |    |        |     |    |    |       |    |     |
|                            | 207.27 |                     |       |    |       | ●   | ●  | ●     |       | ●    | ●     | ●   |    |        |    |        |     |    |    |       |    |     |
| 34                         | 201.34 |                     |       |    |       |     | ●  | ●     |       | ●    | ●     |     |    |        |    |        |     |    |    |       |    |     |
|                            | 203.34 |                     |       |    |       |     |    |       |       |      |       |     | ●  | ●      |    |        |     |    |    |       |    |     |
|                            | 206.34 |                     |       |    |       |     | ●  | ●     | ●     | ●    | ●     | ●   |    |        |    |        |     |    |    |       |    |     |
| 41                         | 201.41 |                     |       |    |       |     | ●  | ●     |       | ●    | ●     | ●   | ●  | ●      |    |        |     |    |    |       |    |     |
|                            | 203.41 |                     |       |    |       |     |    |       |       |      |       |     |    |        | ●  | ●      | ●   |    |    |       |    |     |
|                            | 205.41 |                     |       |    |       |     | ●  | ●     |       | ●    | ●     | ●   | ●  | ●      |    |        |     |    |    |       |    |     |
| 70                         | 203.70 |                     |       |    |       |     |    |       |       |      |       |     | ●  | ●      | ●  | ●      | ●   | ●  | ●  | ●     | ●  | ●   |
|                            | 205.70 |                     |       |    |       |     |    |       |       |      |       |     | ●  | ●      | ●  | ●      | ●   | ●  | ●  | ●     | ●  | ●   |
| Bore ref.                  |        | 14                  | 16    | 18 | 19    | 20  | 22 | 24    | 27    | 28   | 31    | 32  | 35 | 36     | 38 | 41     | 42  | 45 | 46 | 47    | 48 |     |
| Corresponding bore adaptor |        |                     |       |    |       | 251 |    | 253   |       | 254* |       | 257 |    | 259    |    |        | 260 |    |    |       |    | 261 |

Diameters for which a bore adaptor is shown can be adapted to smaller shaft sizes. See page 56 for details.


\*Note that adaptor 254 is dedicated to coupling ref. 201.27. Use adaptor 255 for all other 8mm diameters.



## Blind hubs




Controlled bore depth L1 provides a register when pre-assembling hubs to shafts




Set screw style



Clamp style




Refs. 232, 243  
Set screw style




Refs. 234, 235, 245  
Clamp style


## Thro' hubs




Thro' bores allow disc replacement without disturbing shaft alignment




Set screw style



Clamp style




Refs. 450, 454  
Set screw style



Refs. 452, 453, 456  
Clamp style

24

## Blank hubs



User-adaptable for special needs, e.g. fitting within tubes. Blank hubs are supplied centred with no provision for fastening. External dimensions identical with blind hubs.

| Coupling size | Complete hub ref. | ØD   | L    |
|---------------|-------------------|------|------|
| 06            | 231.06.00         | 6.4  | 12.7 |
| 09            | 231.09.00         | 9.5  | 12.7 |
| 13            | 231.13.00         | 12.7 | 15.9 |
| 19            | 231.19.00         | 19.1 | 22.0 |
| 25            | 231.25.00         | 25.4 | 28.4 |
| 33            | 230.33.00         | 33.3 | 48.0 |
| 33            | 231.33.00         | 33.3 | 42.0 |
| 41            | 231.41.00         | 41.3 | 50.8 |

## Standard discs (larger sizes are webbed)



- Acetal – High torsional stiffness, good bearing properties, long backlash-free life.
- Nylon 11 – Resilient, isolates noise & vibration. Performance approximately 25% that of acetal disc.

## Thro' bored discs



Thro' bored discs allow shafts to near-butt, standard thro' hole diameter =  $\text{ØD} \times 0.5$ . To order, add suffix 'T' to order code, eg., 236.25T  
Other thro' hole diameters are manufactured to order. Specify the disc ref. and thro' hole diameter. This should equal the larger shaft diameter + 2 x max radial error.

*Note that thro' bored discs reduce torsional stiffness.*

## Materials & Finishes

Hub sizes 06 to 13: Brass BS 2874 CZ121

Hub sizes 19 to 57: Al. Alloy 2014A T6 or AIECO 62 Sn T9

Fasteners: Alloy steel, black oiled

Blind & blank hubs: Irridite NCP finish

Thro' hubs:

Torque discs:

Clear anodised finish

Types 236 - Acetal

(black)

Types 238 - Nylon 11

(natural)

## Temperature Range

-20°C to +60°C



## DIMENSIONS & ORDER CODES

| Coupling Type and Size | Hub Ref         |             | Dimensions |      |      |      |         |  |                             |      | Fasteners     |             |                     | Disc Ref           |        |
|------------------------|-----------------|-------------|------------|------|------|------|---------|--|-----------------------------|------|---------------|-------------|---------------------|--------------------|--------|
|                        | Set Screw Style | Clamp Style | ØD         | L    | ① L1 | ② L2 | ØB1 Max | ④ Moment of Inertia kgm <sup>2</sup> x10 <sup>-3</sup> | ④ Mass kg x10 <sup>-3</sup> | Size | ③ Torque (Nm) | Wrench (mm) | Acetal (black) Std. | Nylon 11 (Natural) |        |
| Blind Hubs             | 06              | 232.06      | -          | 6.4  | 12.7 | 3.8  | 5.1     | 3.18   | 6                           | 2.5  | M3            | 0.94        | 1.5                 | 236.06             | 238.06 |
|                        | 09              | 232.09      | -          | 9.5  | 12.7 | 3.8  | 5.1     | 5  | 18                          | 4    | M3            | 0.94        | 1.5                 | 236.09             | 238.09 |
|                        | 13              | 232.13      | -          | 12.7 | 15.9 | 4.3  | 7.3     | 6.35   | 26                          | 11   | M3            | 0.94        | 1.5                 | 236.13             | 238.13 |
|                        | 19              | 232.19      | -          | 19.1 | 22.0 | 6.3  | 9.4     | 8  | 67                          | 12   | M3            | 0.94        | 1.5                 | 236.19             | 238.19 |
|                        |                 | -           | 235.19     |      |      |      |         |  |                             |      | 4-40          | 2.33        | 2.0                 |                    |        |
|                        | 25              | 232.25      | -          | 25.4 | 28.4 | 8.6  | 11.2    | 12   | 252                         | 31   | M4            | 2.27        | 2.0                 | 236.25             | 238.25 |
|                        |                 | -           | 234.25     |      |      |      |         |  |                             |      | M3            | 2.43        | 2.5                 |                    |        |
|                        | 33              | 243.33      | -          | 33.3 | 48.0 | 13.0 | 22.0    | 16   | 1278                        | 86   | M4            | 2.27        | 2.0                 | 236.33             | 238.33 |
|                        | -               | 245.33      |            |      |      |      |         |  |                             | M4   | 5.66          | 3.0         |                     |                    |        |
| 41                     | 232.41          | -           | 41.3       | 50.8 | 16.7 | 17.4 | 20      | 3327   | 148                         | M5   | 4.62          | 2.5         | 236.41              | 238.41             |        |
|                        | -               | 234.41      |            |      |      |      |         |  |                             | M4   | 5.66          | 3.0         |                     |                    |        |
| Thro' Hubs             | 19              | 450H19      | -          | 19.1 | 26.0 | 9.4  | 7.2     | 8  | 59                          | 13   | M4            | 2.27        | 2.0                 | 236.19             | 238.19 |
|                        |                 | -           | 453H19     |      |      |      |         |  |                             |      | 4-40          | 2.33        | 2.0                 |                    |        |
|                        | 25              | 450H25      | -          | 25.4 | 32.4 | 11.6 | 9.2     | 12   | 252                         | 31   | M5            | 4.62        | 2.5                 | 236.25             | 238.25 |
|                        |                 | -           | 452H25     |      |      |      |         |  |                             |      | M3            | 2.43        | 2.5                 |                    |        |
|                        | 33              | 454H33      | -          | 33.3 | 48.0 | 15.0 | 18.0    | 16   | 1133                        | 74   | M6            | 7.61        | 3.0                 | 236.33             | 238.33 |
|                        |                 | -           | 456H33     |      |      |      |         |  |                             |      | M4            | 5.66        | 3.0                 |                    |        |
|                        | 41              | 450H41      | -          | 41.3 | 50.8 | 17.8 | 15.3    | 20   | 3177                        | 142  | M6            | 7.61        | 3.0                 | 236.41             | 238.41 |
|                        |                 | -           | 452H41     |      |      |      |         |  |                             |      | M4            | 5.66        | 3.0                 |                    |        |
|                        | 50              | 450H50      | -          | 50.0 | 59.6 | 20.6 | 18.4    | 25.4   | 7550                        | 208  | M8            | 18.36       | 4.0                 | 236.50             | -      |
|                        |                 | -           | 452H50     |      |      |      |         |  |                             |      | M5            | 11.40       | 4.0                 |                    |        |
| 57                     | 450H57          | -           | 57.1       | 78.0 | 28.4 | 21.2 | 30      | 12410  | 361                         | M8   | 18.36         | 4.0         | 236.57              | -                  |        |
|                        | -               | 452H57      |            |      |      |      |         |  |                             | M6   | 19.34         | 5.0         |                     |                    |        |

## PERFORMANCE (AT 20°C WITH STANDARD ACETAL DISC)

| Coupling Size | ⑤ Peak torque Nm | ⑥ Max compensation @ 3000 r.p.m. |           |            | ⑦ Torsional   |                    | Static break torque Nm |
|---------------|------------------|----------------------------------|-----------|------------|---------------|--------------------|------------------------|
|               |                  | Angular deg                      | Radial mm | Axial ± mm | Rate deg / Nm | Stiffness Nm / rad |                        |
| 06            | 0.06             | 0.5                              | 0.1       | 0.05       | 5.7           | 10                 | 0.7                    |
| 09            | 0.21             |                                  | 0.1       | 0.05       | 1.9           | 30                 | 2                      |
| 13            | 0.5              |                                  | 0.1       | 0.05       | 0.88          | 65                 | 4                      |
| 19            | 1.7              |                                  | 0.2       | 0.1        | 0.50          | 115                | 8                      |
| 25            | 4                |                                  | 0.2       | 0.1        | 0.28          | 205                | 13                     |
| 33            | 9                |                                  | 0.2       | 0.15       | 0.093         | 615                | 53                     |
| 41            | 17               |                                  | 0.25      | 0.15       | 0.048         | 1200               | 57                     |
| 50            | 30               |                                  | 0.25      | 0.2        | 0.042         | 1375               | 95                     |
| 57            | 44               | 0.25                             | 0.2       | 0.022      | 2610          | 150                |                        |

NB. Size 33 available in both 'standard' and 'long' versions

**IMPORTANT**


Load capacity depends on application conditions: see page 6 for details

- ① **Blind hubs:** Length of parallel bore ±0.2. Bores may terminate in 118° incl. angle.  
**Thro' hubs:** Max permissible hub penetration.
- ② **Blind hubs:** Nominal distance between unchamfered shafts bottomed out to L1.  
**Thro' hubs:** Nominal distance between shafts with standard (unbored) disc.
- ③ Maximum recommended tightening torque (see also next page under 'Clamp hubs')
- ④ Values apply to complete couplings with max bores.
- ⑤ **Peak torque.** Select a size where Peak Torque exceeds the application torque x service factor.
- ⑥ Couplings can provide up to (ØD x 0.1) radial compensation in extreme cases. Observe given values for maximum backlash-free life.  
Axial compensation is set on installation. See next page for details.  
Electrical isolation between shafts > 3kV.
- ⑦ Values apply at 50% peak torque with no misalignment, measured shaft-to-shaft with largest standard bores.
- ⑧ Thro' hubs can be provided with keyways or 'D' bores. See page 56 for details.


For Standard Bores see page 26




## Thro' hubs




Thro' bores allow disc replacement without disturbing shaft alignment




Set screw style



Clamp style



Ref. 850  
Set screw style



Ref. 852  
Clamp style

## DIMENSIONS & ORDER CODES

| Size | Hub Ref         |             | Dimensions |      |      |      |         |  |                           | Fasteners |             |          | Disc Ref            |                |
|------|-----------------|-------------|------------|------|------|------|---------|--|---------------------------|-----------|-------------|----------|---------------------|----------------|
|      | Set Screw Style | Clamp Style | OD         | L    | L1   | L2   | ØB1 Max | Moment of Inertia kgm <sup>2</sup> x10 <sup>-3</sup> | Mass kg x10 <sup>-3</sup> | Size      | Torque (Nm) | A/F (mm) | Acetal (black) Std. | Nylon 11 (Nat) |
| 25   | 850.25          | -           | 25.4       | 32.4 | 11.6 | 9.2  | 12.0    | 587  | 76                        | M5        | 2.1         | 2.5      | 236.25              | 238.25         |
|      | -               | 852.25      |            |      |      |      |         |  |                           | M3        | 1.2         | 2.5      |                     |                |
| 33   | 850.33          | -           | 33.3       | 42.0 | 15.0 | 12.0 | 16.0    | 2091   | 165                       | M6        | 3.8         | 3.0      | 236.33              | 238.33         |
|      | -               | 852.33      |            |      |      |      |         |  |                           | M4        | 2.9         | 3.0      |                     |                |
| 41   | 850.41          | -           | 41.3       | 50.8 | 17.8 | 15.3 | 20.0    | 6822   | 305                       | M6        | 3.8         | 3.0      | 236.41              | 238.41         |
|      | -               | 852.41      |            |      |      |      |         |  |                           | M5        | 5.9         | 4.0      |                     |                |
| 50   | 850.50          | -           | 50.0       | 59.6 | 20.6 | 20.6 | 25.4    | 17368  | 510                       | M8        | 9.0         | 4.0      | 236.50              | N/A            |
|      | -               | 852.50      |            |      |      |      |         |  |                           | M6        | 9.8         | 5.0      |                     |                |

26

## PERFORMANCE

| Size | Peak Torque (Nm) | Max compensation @ 3000 rev/min |           |              | Torsional   |              | Static break torque (Nm) |
|------|------------------|---------------------------------|-----------|--------------|-------------|--------------|--------------------------|
|      |                  | Angular deg                     | Radial mm | Axial +/- mm | Rate deg/Nm | Stiff Nm/Rad |                          |
| 25   | 4                | 0.5                             | 0.2       | 0.1          | 0.28        | 205          | 13                       |
| 33   | 9                |                                 | 0.2       | 0.15         | 0.093       | 615          | 53                       |
| 41   | 17               |                                 | 0.25      | 0.15         | 0.048       | 1200         | 57                       |
| 50   | 30               |                                 | 0.25      | 0.12         | 0.042       | 1375         | 95                       |

## STANDARD BORES<sup>8</sup>

| Coupling Size | ØB +0.03/-0mm |    |       |    |       |    |    |       |    |       |    |    |        |    |    |        |    |    |    |        |    |    |    |    |
|---------------|---------------|----|-------|----|-------|----|----|-------|----|-------|----|----|--------|----|----|--------|----|----|----|--------|----|----|----|----|
|               | 2             | 3  | 3.175 | 4  | 4.763 | 5  | 6  | 6.350 | 8  | 9.525 | 10 | 12 | 12.700 | 14 | 15 | 15.875 | 16 | 18 | 19 | 19.050 | 20 | 24 | 25 | 30 |
| 06            | •             | •  | •     |    |       |    |    |       |    |       |    |    |        |    |    |        |    |    |    |        |    |    |    |    |
| 09            |               | •  | •     | •  | •     | •  |    |       |    |       |    |    |        |    |    |        |    |    |    |        |    |    |    |    |
| 13            |               | •  | •     | •  | •     | •  | •  | •     |    |       |    |    |        |    |    |        |    |    |    |        |    |    |    |    |
| 19            |               |    |       | •  | •     | •  | •  | •     | •  |       |    |    |        |    |    |        |    |    |    |        |    |    |    |    |
| 25            |               |    |       |    |       |    | •  | •     | •  | •     | •  |    |        |    |    |        |    |    |    |        |    |    |    |    |
| 33            |               |    |       |    |       |    |    | •     | •  | •     | •  | •  | •      | •  | •  | •      | •  |    |    |        |    |    |    |    |
| 41            |               |    |       |    |       |    |    |       | •  | •     | •  | •  | •      | •  | •  | •      | •  | •  | •  | •      | •  |    |    |    |
| 50            |               |    |       |    |       |    |    |       |    | •     | •  | •  | •      | •  | •  | •      | •  | •  | •  | •      | •  | •  | •  | •  |
| 57            |               |    |       |    |       |    |    |       |    |       | •  | •  | •      | •  | •  | •      | •  | •  | •  | •      | •  | •  | •  | •  |
| Bore ref.     | 11            | 14 | 16    | 18 | 19    | 20 | 22 | 24    | 28 | 31    | 32 | 35 | 36     | 38 | 40 | 41     | 42 | 45 | 46 | 47     | 48 | 51 | 52 | 56 |

## Materials & Finishes

Hubs : Stainless Steel 303 S31 - Natural Finish  
 Fasteners: Stainless Steel  
 Discs: Torque disc details on page 24

## Temperature Range

-20°C to +60°C

## Maximum Rotational Speed

3000 rev/min

# beam couplings

- Multi-Beam
- Single-Beam
- Step-Beam

- Torsionally rigid design
- Zero backlash
- No moving parts
- Single beam simple coupling compatible with industry standard types
- 3-Beam single stage for increased torsional stiffness
- 6-Beam two stage for torsional stiffness and increased radial compliance
- Step Beam for low inertia, electrical isolation, low cost

Beam couplings will readily accommodate any combination of axial motion, angular and parallel misalignment.

The 3 start helical-cut design provides higher torque capability and reduced wind-up compared with single beam versions.



Multi-Beam is available in three standard materials: stainless steel, aluminium and acetal, for shaft diameters from 1mm to 38mm.




# Multi-Beam Stainless Steel Multi-Helix Flexible Beam Couplings



## Set screw hubs

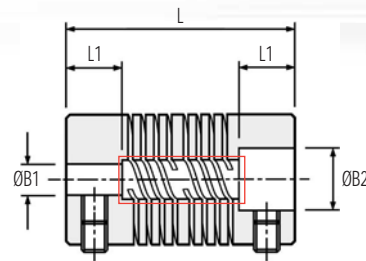


Ref. 702 : 6-Beam Non-Relieved  
Ref. 722 : 6-Beam Relieved




Typical


## Clamp hubs



Ref. 721  
3-Beam Relieved

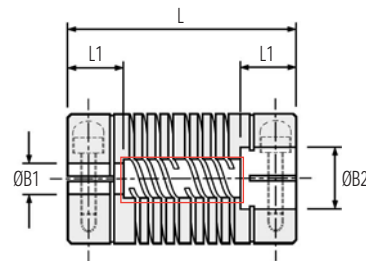

Ref. 703 : 6-Beam Non-Relieved  
Ref. 723 : 6-Beam Relieved



Typical

## 3-BEAM COUPLINGS: DIMENSIONS & ORDER CODES

| Coupling Type & Size | Set Screw Style | Clamp Style | ØD     | L    | ①    | Bore Diameters |        |             | Set Screw | Cap Screw | ② Angular Offset Deg. | ② Parallel Offset mm | ③ Peak Torque Nm |      |
|----------------------|-----------------|-------------|--------|------|------|----------------|--------|-------------|-----------|-----------|-----------------------|----------------------|------------------|------|
|                      |                 |             |        |      |      | Min B1         | Min B2 | Max B1 & B2 |           |           |                       |                      |                  |      |
| Relieved             | 06              | 720.06      | -      | 6.4  | 12.7 | 3.2            | 1.0    | 2.0         | 3.0       | M2        | -                     | 3                    | 0.07             | 0.45 |
|                      | 09              | 720.09      | -      | 9.5  | 14.2 | 4.5            | 2.0    | 3.0         | 3.18      | M2.5      | M1.6                  | 3                    | 0.1              | 0.50 |
|                      |                 | -           | 721.09 |      |      |                |        |             |           |           |                       |                      |                  |      |
|                      | 13              | 720.13      | -      | 12.7 | 19.1 | 6.0            | 3.0    | 4.0         | 5.0       | M3        | M2                    | 5                    | 0.127            | 1.0  |
|                      |                 | -           | 721.13 |      |      |                |        |             |           |           |                       |                      |                  |      |
|                      | 16              | 720.16      | -      | 15.9 | 20.3 | 6.5            | 3.0    | 4.0         | 6.35      | M4        | M2.5                  | 5                    | 0.127            | 1.80 |
|                      |                 | -           | 721.16 |      |      |                |        |             |           |           |                       |                      |                  |      |
|                      | 19              | 720.19      | -      | 19.1 | 22.9 | 6.5            | 4.0    | 4.76        | 8.0       | M4        | M2.5                  | 5                    | 0.127            | 2.70 |
|                      |                 | -           | 721.19 |      |      |                |        |             |           |           |                       |                      |                  |      |
|                      | 25              | 720.25      | -      | 25.4 | 31.8 | 9.0            | 5.0    | 6.0         | 10.0      | M5        | M3                    | 5                    | 0.127            | 6.0  |
| -                    |                 | 721.25      |        |      |      |                |        |             |           |           |                       |                      |                  |      |
| 32                   | 720.32          | -           | 31.8   | 44.5 | 12.0 | 6.0            | 8.0    | 14.0        | M6        | M4        | 5                     | 0.127                | 10.0             |      |
|                      | -               | 721.32      |        |      |      |                |        |             |           |           |                       |                      |                  |      |

All 3-beam couplings are in relieved form as standard. See above drawings.

### Materials & Finishes

Couplings: Stainless Steel 303 S31  
Fasteners: Stainless Steel

### Temperature Range

-40°C to +140°C

BORE SIZES - SEE TABLE ON PAGE 32

# Multi-Beam Stainless Steel Multi-Helix Flexible Beam Couplings



## 6-BEAM COUPLINGS: DIMENSIONS & ORDER CODES

| Coupling Type & Size | Set Screw Style | Clamp Style | ØD     | L    | L1    | Bore Diameters |        |             | Set Screw | Cap Screw | ② Angular Offset Deg. | ② Parallel Offset mm | ③ Peak Torque Nm |       |      |
|----------------------|-----------------|-------------|--------|------|-------|----------------|--------|-------------|-----------|-----------|-----------------------|----------------------|------------------|-------|------|
|                      |                 |             |        |      |       | Min B1         | Min B2 | Max B1 & B2 |           |           |                       |                      |                  |       |      |
| COUPLING REF         |                 |             |        |      |       |                |        |             |           |           |                       |                      |                  |       |      |
| Non-Relieved         | 09              | 702.09<br>- | 703.09 | 9.5  | 19.6  | 5.3            | 2.0    | 4.0         | 4.76      | M2.5      | M1.6                  | 3                    | 0.12             | 1.5   |      |
|                      | 13              | 702.13<br>- | 703.13 | 12.7 | 25.4  | 6.5            | 3.0    | 5.0         | 6.35      | M3        | M2                    | 5                    | 0.17             | 3.0   |      |
|                      |                 | 702.16<br>- | 703.16 |      |       |                |        |             |           |           |                       |                      |                  |       | 6.0  |
|                      | 19              | 702.19<br>- | 703.19 | 19.1 | 28.0  | 6.5            | 4.76   | 6.35        | 10.0      | M4        | M2.5                  | 7                    | 0.25             | 8.0   |      |
|                      |                 | 702.25<br>- | 703.25 |      |       |                |        |             |           |           |                       |                      |                  |       | 5.0  |
|                      | 32              | 702.32<br>- | 703.32 | 31.8 | 57.2  | 16.0           | 8.0    | 10.0        | 19.0      | M6        | M4                    | 7                    | 0.5              | 25.0  |      |
|                      |                 | 702.38<br>- | 703.38 |      |       |                |        |             | 22.0      |           |                       |                      |                  |       | 19.0 |
|                      | 44              | 702.44<br>- | 703.44 | 44.5 | 76.2  | 20.0           | 9.0    | 14.0        | 25.0      | M6        | M5                    | 7                    | 0.8              | 48.0  |      |
|                      |                 | 702.51<br>- | 703.51 |      |       |                |        |             | 28.0      |           |                       |                      |                  |       | 26.0 |
|                      | 57              | 702.57<br>- | 703.57 | 57.2 | 130.0 | 32.0           | 10.0   | 20.0        | 32.0      | M8        | M6                    | 7                    | 0.95             | 102.0 |      |
|                      |                 | 702.64<br>- | 703.64 |      |       |                |        |             | 30.0      |           |                       |                      |                  |       | 38.0 |
|                      |                 |             |        |      |       |                |        |             | 36.0      |           |                       |                      |                  |       |      |

## Materials & Finishes

Couplings: Stainless Steel 303 S31  
Fasteners: Stainless Steel

## Temperature Range

-40°C to +140°C

- ① Length of supported bore.
- ② Max. compensation values are mutually exclusive.
- ③ *Peak torque.* Select a size where Peak Torque exceeds the application torque x service factor. (see page 6)
- ④ *6-beam couplings only.* If either shaft extends beneath the beams, the area shown in blue must be *relieved* to provide clearance under the flexure.

|          |    |             |        |      |       |      |      |      |      |      |      |   |      |      |      |
|----------|----|-------------|--------|------|-------|------|------|------|------|------|------|---|------|------|------|
| Relieved | 09 | 722.09<br>- | 723.09 | 9.5  | 19.6  | 5.3  | 2.0  | 3.0  | 4.76 | M2.5 | M1.6 | 3 | 0.12 | 0.9  |      |
|          | 13 | 722.13<br>- | 723.13 | 12.7 | 25.4  | 6.5  | 3.0  | 4.0  | 6.35 | M3   | M2   | 5 | 0.17 | 1.9  |      |
|          |    | 722.16<br>- | 723.16 |      |       |      |      |      |      |      |      |   |      |      | 3.0  |
|          | 19 | 722.19<br>- | 723.19 | 19.1 | 28.0  | 6.5  | 4.76 | 5.0  | 10.0 | M4   | M2.5 | 7 | 0.25 | 4.8  |      |
|          |    | 722.25<br>- | 723.25 |      |       |      |      |      |      |      |      |   |      |      | 5.0  |
|          | 32 | 722.32<br>- | 723.32 | 31.8 | 57.2  | 16.0 | 8.0  | 9.53 | 19.0 | M6   | M4   | 7 | 0.5  | 13.0 |      |
|          |    | 722.38<br>- | 723.38 |      |       |      |      |      | 22.0 |      |      |   |      |      | 19.0 |
|          | 44 | 722.44<br>- | 723.44 | 44.5 | 76.2  | 20.0 | 9.0  | 14.0 | 25.0 | M6   | M5   | 7 | 0.8  | 27.0 |      |
|          |    | 722.51<br>- | 723.51 |      |       |      |      |      | 28.0 |      |      |   |      |      | 26.0 |
|          | 57 | 722.57<br>- | 723.57 | 57.2 | 130.0 | 32.0 | 10.0 | 20.0 | 32.0 | M8   | M6   | 7 | 0.95 | 50.0 |      |
|          |    | 722.64<br>- | 723.64 |      |       |      |      |      | 30.0 |      |      |   |      |      | 38.0 |
|          |    |             |        |      |       |      |      |      | 36.0 |      |      |   |      |      |      |

Sizes 38 - 64 manufactured to order only


**BORE SIZES - SEE TABLE ON PAGE 33**

If either shaft extends beneath the beams, the area shown outlined in red must be relieved to provide clearance under the flexure.


# Multi-Beam Aluminium Multi-Helix Flexible Beam Couplings




## Set screw hubs



Ref. 724  
3-Beam Relieved

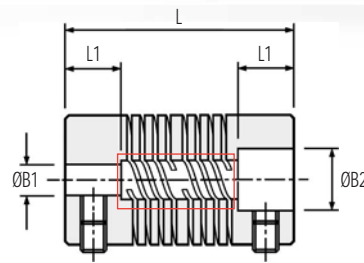


Ref. 706 : 6-Beam Non-Relieved  
Ref. 726 : 6-Beam Relieved




Typical


## Clamp hubs



Ref. 725  
3-Beam Relieved

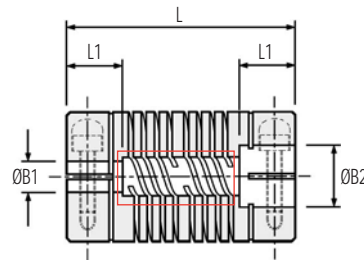

Ref. 707 : 6-Beam Non-Relieved  
Ref. 727 : 6-Beam Relieved



Typical

30

## 3-BEAM COUPLINGS: DIMENSIONS & ORDER CODES

| Coupling Type & Size | Set Screw Style | Clamp Style | ØD     | L    | L1   | Bore Diameters |        |             | Set Screw | Cap Screw | ② Angular Offset Deg. | ② Parallel Offset mm | ③ Peak Torque Nm |      |
|----------------------|-----------------|-------------|--------|------|------|----------------|--------|-------------|-----------|-----------|-----------------------|----------------------|------------------|------|
|                      |                 |             |        |      |      | Min B1         | Min B2 | Max B1 & B2 |           |           |                       |                      |                  |      |
| Relieved             | 06              | 724.06      | -      | 6.4  | 12.7 | 3.2            | 1.0    | 2.0         | 3.0       | M2        | -                     | 3                    | 0.07             | 0.40 |
|                      | 09              | 724.09      | -      | 9.5  | 14.2 | 4.5            | 2.0    | 3.0         | 3.18      | M2.5      | M1.6                  | 3                    | 0.1              | 0.40 |
|                      |                 | -           | 725.09 |      |      |                |        |             |           |           |                       |                      |                  |      |
|                      | 13              | 724.13      | -      | 12.7 | 19.1 | 6.0            | 3.0    | 4.0         | 5.0       | M3        | M2                    | 5                    | 0.127            | 0.90 |
|                      |                 | -           | 725.13 |      |      |                |        |             |           |           |                       |                      |                  |      |
|                      | 16              | 724.16      | -      | 15.9 | 20.3 | 6.5            | 3.0    | 4.0         | 6.35      | M4        | M2.5                  | 5                    | 0.127            | 1.50 |
|                      |                 | -           | 725.16 |      |      |                |        |             |           |           |                       |                      |                  |      |
|                      | 19              | 724.19      | -      | 19.1 | 22.9 | 6.5            | 4.0    | 4.76        | 8.0       | M4        | M2.5                  | 5                    | 0.127            | 2.50 |
|                      |                 | -           | 725.19 |      |      |                |        |             |           |           |                       |                      |                  |      |
|                      | 25              | 724.25      | -      | 25.4 | 31.8 | 9.0            | 5.0    | 6.0         | 10.0      | M5        | M3                    | 5                    | 0.127            | 4.0  |
| -                    |                 | 725.25      | -      |      |      |                |        |             |           |           |                       |                      |                  |      |
| 32                   | 724.32          | -           | 31.8   | 44.5 | 12.0 | 6.0            | 8.0    | 14.0        | M6        | M4        | 5                     | 0.127                | 6.0              |      |
|                      | -               | 725.32      |        |      |      |                |        |             |           |           |                       |                      |                  | -    |

All 3-beam couplings are in relieved form as standard. See above drawings.

## Materials & Finishes

Couplings: Aluminium L168 or better

Fasteners: Alloy steel. black oiled

## Temperature Range

-40°C to +120°C

BORE SIZES - SEE TABLE ON PAGE 32

# Multi-Beam Aluminium Multi-Helix Flexible Beam Couplings



## 6-BEAM COUPLINGS: DIMENSIONS & ORDER CODES

| Coupling Type & Size | Set Screw Style | Clamp Style | ØD     | L    | ① L1  | Bore Diameters |        |             | Set Screw    | Cap Screw | ② Angular Offset Deg. | ② Parallel Offset mm | ③ Peak Torque Nm |      |
|----------------------|-----------------|-------------|--------|------|-------|----------------|--------|-------------|--------------|-----------|-----------------------|----------------------|------------------|------|
|                      |                 |             |        |      |       | Min B1         | Min B2 | Max B1 & B2 |              |           |                       |                      |                  |      |
| Non-Relieved         | 09              | 706.09<br>- | 707.09 | 9.5  | 19.6  | 5.3            | 2.0    | 4.0         | 4.76         | M2.5      | M1.6                  | 3                    | 0.12             | 1.0  |
|                      | 13              | 706.13<br>- | 707.13 | 12.7 | 22.9  | 6.5            | 3.0    | 5.0         | 6.35         | M3        | M2                    | 5                    | 0.17             | 2.0  |
|                      | 16              | 706.16<br>- | 707.16 | 15.9 | 25.4  | 6.5            | 3.0    | 6.0         | 8.0          | M4        | M2.5                  | 5                    | 0.2              | 3.4  |
|                      | 19              | 706.19<br>- | 707.19 | 19.1 | 26.5  | 6.5            | 4.76   | 6.35        | 10.0         | M4        | M2.5                  | 7                    | 0.25             | 5.3  |
|                      | 25              | 706.25<br>- | 707.25 | 25.4 | 38.1  | 11.0           | 5.0    | 8.0         | 12.7         | M5        | M3                    | 7                    | 0.38             | 10.0 |
|                      | 32              | 706.32<br>- | 707.32 | 31.8 | 57.2  | 16.0           | 8.0    | 10.0        | 19.0<br>16.0 | M6        | M4                    | 7                    | 0.5              | 15.0 |
|                      | 38              | 706.38<br>- | 707.38 | 38.1 | 66.7  | 18.0           | 8.0    | 12.0        | 22.0<br>19.0 | M6        | M5                    | 7                    | 0.6              | 22.0 |
|                      | 44              | 706.44<br>- | 707.44 | 44.5 | 76.2  | 20.0           | 9.0    | 14.0        | 25.0<br>22.0 | M6        | M5                    | 7                    | 0.8              | 30.0 |
|                      | 51              | 706.51<br>- | 707.51 | 50.8 | 95.3  | 25.0           | 10.0   | 16.0        | 28.0<br>26.0 | M8        | M6                    | 7                    | 0.9              | 40.0 |
|                      | 57              | 706.57<br>- | 707.57 | 57.2 | 130.0 | 32.0           | 10.0   | 20.0        | 32.0<br>30.0 | M8        | M6                    | 7                    | 0.95             | 55.0 |
|                      | 64              | 706.64<br>- | 707.64 | 63.5 | 150.0 | 38.0           | 12.0   | 25.0        | 38.0<br>36.0 | M8        | M8                    | 7                    | 1.0              | 75.0 |

## Materials & Finishes

Couplings: Aluminium L168 or better

Fasteners: Alloy steel, black oiled

## Temperature Range

-40°C to +120°C

- ① Length of supported bore.
- ② Max. compensation values are mutually exclusive.
- ③ Peak torque. Select a size where Peak Torque exceeds the application torque x service factor. (see page 6)
- ④ 6-beam couplings only. If either shaft extends beneath the beams, the area shown in blue must be relieved to provide clearance under the flexure.

|          |    |             |        |      |       |      |      |      |              |      |      |   |      |      |
|----------|----|-------------|--------|------|-------|------|------|------|--------------|------|------|---|------|------|
| Relieved | 09 | 726.09<br>- | 727.09 | 9.5  | 19.6  | 5.3  | 2.0  | 3.0  | 4.76         | M2.5 | M1.6 | 3 | 0.12 | 0.6  |
|          | 13 | 726.13<br>- | 727.13 | 12.7 | 22.9  | 6.5  | 3.0  | 4.0  | 6.35         | M3   | M2   | 5 | 0.17 | 1.3  |
|          | 16 | 726.16<br>- | 727.16 | 15.9 | 25.4  | 6.5  | 3.0  | 4.0  | 8.0          | M4   | M2.5 | 5 | 0.2  | 2.0  |
|          | 19 | 726.19<br>- | 727.19 | 19.1 | 26.5  | 6.5  | 4.76 | 5.0  | 10.0         | M4   | M2.5 | 7 | 0.25 | 3.0  |
|          | 25 | 726.25<br>- | 727.25 | 25.4 | 38.1  | 11.0 | 5.0  | 6.0  | 12.7         | M5   | M3   | 7 | 0.38 | 5.0  |
|          | 32 | 726.32<br>- | 727.32 | 31.8 | 57.2  | 16.0 | 8.0  | 9.53 | 19.0<br>16.0 | M6   | M4   | 7 | 0.5  | 7.0  |
|          | 38 | 726.38<br>- | 727.38 | 38.1 | 66.7  | 18.0 | 8.0  | 12.0 | 22.0<br>19.0 | M6   | M5   | 7 | 0.6  | 11.0 |
|          | 44 | 726.44<br>- | 727.44 | 44.5 | 76.2  | 20.0 | 9.0  | 14.0 | 25.0<br>22.0 | M6   | M5   | 7 | 0.8  | 15.0 |
|          | 51 | 726.51<br>- | 727.51 | 50.8 | 95.3  | 25.0 | 10.0 | 16.0 | 28.0<br>26.0 | M8   | M6   | 7 | 0.9  | 20.0 |
|          | 57 | 726.57<br>- | 727.57 | 57.2 | 130.0 | 32.0 | 10.0 | 20.0 | 32.0<br>30.0 | M8   | M6   | 7 | 0.95 | 28.0 |
|          | 64 | 726.64<br>- | 727.64 | 63.5 | 150.0 | 38.0 | 12.0 | 25.0 | 38.0<br>36.0 | M8   | M8   | 7 | 1.0  | 38.0 |

Sizes 38 - 64 manufactured to order only


**BORE SIZES - SEE TABLE ON PAGE 33**

If either shaft extends beneath the beams, the area shown outlined in red must be relieved to provide clearance under the flexure.


# Multi-Beam Acetal Multi-Helix Flexible Beam Couplings




## Set screw hubs



Ref. 728  
3-Beam Relieved

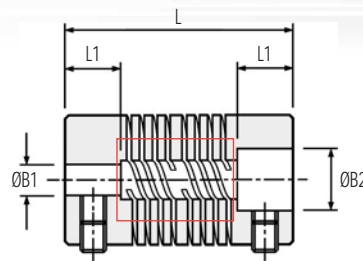


Ref. 710 : 6-Beam Non-Relieved  
Ref. 730 : 6-Beam Relieved




Typical


## Clamp hubs



Ref. 729  
3-Beam Relieved

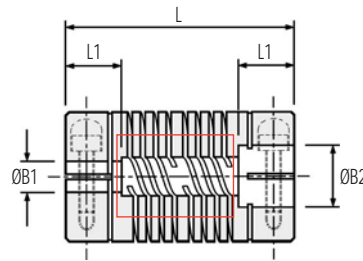

Ref. 711 : 6-Beam Non-Relieved  
Ref. 731 : 6-Beam Relieved



Typical

32

## 3-BEAM COUPLINGS: DIMENSIONS & ORDER CODES

| Coupling Type & Size | Set Screw Style | Clamp Style | ØD   | L    | L1  | Bore Diameters |        |             | Set Screw | Cap Screw | ② Angular Offset Deg. | ② Parallel Offset mm | ③ Peak Torque Nm |
|----------------------|-----------------|-------------|------|------|-----|----------------|--------|-------------|-----------|-----------|-----------------------|----------------------|------------------|
|                      |                 |             |      |      |     | Min B1         | Min B2 | Max B1 & B2 |           |           |                       |                      |                  |
| Relieved             | 728.13          | -           | 12.7 | 19.1 | 6.0 | 3.0            | 4.0    | 5.0         | M3        | M2        | 5                     | 0.127                | 0.24             |
|                      | -               | 729.13      |      |      |     |                |        |             |           |           |                       |                      |                  |
|                      | 728.16          | -           | 15.9 | 20.3 | 6.5 | 3.0            | 4.0    | 6.0         | M4        | M2.5      | 5                     | 0.127                | 0.35             |
|                      | -               | 729.16      |      |      |     |                |        |             |           |           |                       |                      |                  |
|                      | 728.19          | -           | 19.1 | 22.9 | 6.5 | 4.0            | 4.76   | 8.0         | M4        | M2.5      | 5                     | 0.127                | 0.64             |
|                      | -               | 729.19      |      |      |     |                |        |             |           |           |                       |                      |                  |
| 728.25               | -               | 25.4        | 31.8 | 9.0  | 5.0 | 6.0            | 10.0   | M5          | M3        | 5         | 0.127                 | 1.40                 |                  |
| -                    | 729.25          |             |      |      |     |                |        |             |           |           |                       |                      |                  |
| 728.32               | -               | 31.8        | 44.5 | 12.0 | 6.0 | 8.0            | 12.0   | M6          | M4        | 5         | 0.127                 | 2.50                 |                  |
| -                    | 729.32          |             |      |      |     |                |        |             |           |           |                       |                      |                  |

## Materials & Finishes

Couplings: Acetal (natural)

Fasteners: Stainless steel

## Temperature Range

-20°C to +60°C

All 3-beam couplings are in relieved form as standard. See above drawings.

## BORE SIZES 3-BEAM COUPLINGS

| Coupling Size | ØB1, ØB2 +0.03/-0mm |    |    |       |    |       |    |    |       |    |       |    |    |        |    |
|---------------|---------------------|----|----|-------|----|-------|----|----|-------|----|-------|----|----|--------|----|
|               | 1                   | 2  | 3  | 3.175 | 4  | 4.763 | 5  | 6  | 6.350 | 8  | 9.525 | 10 | 12 | 12.700 | 14 |
| 06            | ○                   | ●  | ●  |       |    |       |    |    |       |    |       |    |    |        |    |
| 09            |                     | ○  | ●  | ●     |    |       |    |    |       |    |       |    |    |        |    |
| 13            |                     |    | ○  | ○     | ●  | ●     | ●  |    |       |    |       |    |    |        |    |
| 16            |                     |    | ○  | ○     | ●  | ●     | ●  | ●  | ●     |    |       |    |    |        |    |
| 19            |                     |    |    |       | ○  | ●     | ●  | ●  | ●     | ●  |       |    |    |        |    |
| 25            |                     |    |    |       |    |       | ○  | ●  | ●     | ●  | ●     | ●  |    |        |    |
| 32            |                     |    |    |       |    |       |    | ○  | ○     | ●  | ●     | ●  | ●  | ●      | ●  |
| Bore ref.     | 08                  | 11 | 14 | 16    | 18 | 19    | 20 | 22 | 24    | 28 | 31    | 32 | 35 | 36     | 38 |

○ B1 only    ● B1 & B2

● Aluminium and Stainless Steel Only



+44 (0) 1992 501900

# Multi-Beam Acetal Multi-Helix Flexible Beam Couplings



## 6-BEAM COUPLINGS: DIMENSIONS & ORDER CODES

| Coupling Type & Size | Set Screw Style | Clamp Style | ØD | L    | ①    | Bore Diameters |        |             | Set Screw | Cap Screw | ② Angular Offset Deg. | ② Parallel Offset mm | ③ Peak Torque Nm |      |
|----------------------|-----------------|-------------|----|------|------|----------------|--------|-------------|-----------|-----------|-----------------------|----------------------|------------------|------|
|                      |                 |             |    |      |      | Min B1         | Min B2 | Max B1 & B2 |           |           |                       |                      |                  |      |
| Non-Relieved         | 13              | 710.13<br>- | -  | 12.7 | 22.9 | 6.5            | 3.0    | 5.0         | 6.0       | M3        | M2                    | 5                    | 0.17             | 0.51 |
|                      | 16              | 710.16<br>- | -  | 15.9 | 25.4 | 6.5            | 3.0    | 6.0         | 8.0       | M4        | M2.5                  | 5                    | 0.2              | 0.91 |
|                      | 19              | 710.19<br>- | -  | 19.1 | 26.5 | 6.5            | 4.0    | 6.35        | 9.53      | M4        | M2.5                  | 7                    | 0.25             | 1.3  |
|                      | 25              | 710.25<br>- | -  | 25.4 | 38.1 | 11.0           | 5.0    | 8.0         | 12.0      | M5        | M3                    | 7                    | 0.38             | 2.5  |
|                      | 32              | 710.32<br>- | -  | 31.8 | 57.2 | 16.0           | 8.0    | 10.0        | 16.0      | M6        | M4                    | 7                    | 0.5              | 4.0  |

## Materials & Finishes

Couplings: Acetal (natural)  
Fasteners: Stainless steel

## Temperature Range

-20°C to +60°C

- ① Length of supported bore.
- ② Max. compensation values are mutually exclusive.
- ③ Peak torque. Select a size where Peak Torque exceeds the application torque x service factor (see page 6).
- ④ 6-beam couplings only. If either shaft extends beneath the beams, the area shown in blue must be relieved to provide clearance under the flexure.

|          |    |             |   |      |      |      |     |      |      |    |      |   |      |      |
|----------|----|-------------|---|------|------|------|-----|------|------|----|------|---|------|------|
| Relieved | 13 | 730.13<br>- | - | 12.7 | 22.9 | 6.5  | 3.0 | 4.0  | 5.0  | M3 | M2   | 5 | 0.17 | 0.32 |
|          | 16 | 730.16<br>- | - | 15.9 | 25.4 | 6.5  | 3.0 | 4.0  | 6.35 | M4 | M2.5 | 5 | 0.2  | 0.61 |
|          | 19 | 730.19<br>- | - | 19.1 | 26.5 | 6.5  | 4.0 | 5.0  | 8.0  | M4 | M2.5 | 7 | 0.25 | 0.87 |
|          | 25 | 730.25<br>- | - | 25.4 | 38.1 | 11.0 | 5.0 | 6.0  | 10.0 | M5 | M3   | 7 | 0.38 | 1.67 |
|          | 32 | 730.32<br>- | - | 31.8 | 57.2 | 16.0 | 8.0 | 9.53 | 12.7 | M6 | M4   | 7 | 0.5  | 2.4  |

If either shaft extends beneath the beams, the area shown outlined in red must be relieved to provide clearance under the flexure.

## BORE SIZES 6-BEAM COUPLINGS

NON-RELIEVED

33

| Size      | ØB1, ØB2 +0.03/-0mm |    |       |    |       |    |    |      |    |       |    |    |      |    |       |    |    |    |       |    |    |    |      |    |    |       |    |  |
|-----------|---------------------|----|-------|----|-------|----|----|------|----|-------|----|----|------|----|-------|----|----|----|-------|----|----|----|------|----|----|-------|----|--|
|           | 2                   | 3  | 3.175 | 4  | 4.763 | 5  | 6  | 6.35 | 8  | 9.525 | 10 | 12 | 12.7 | 14 | 15.88 | 16 | 18 | 19 | 19.05 | 20 | 24 | 25 | 25.4 | 28 | 30 | 31.75 | 32 |  |
| 9         | ○                   | ○  | ○     | ●  | ●     |    |    |      |    |       |    |    |      |    |       |    |    |    |       |    |    |    |      |    |    |       |    |  |
| 13        |                     | ○  | ○     | ○  | ○     | ●  | ●  | ●    |    |       |    |    |      |    |       |    |    |    |       |    |    |    |      |    |    |       |    |  |
| 16        |                     | ○  | ○     | ○  | ○     | ○  | ●  | ●    | ●  |       |    |    |      |    |       |    |    |    |       |    |    |    |      |    |    |       |    |  |
| 19        |                     |    |       |    | ○     | ○  | ○  | ●    | ●  | ●     | ●  | ●  | ●    |    |       |    |    |    |       |    |    |    |      |    |    |       |    |  |
| 25        |                     |    |       |    |       | ○  | ○  | ○    | ○  | ●     | ●  | ●  | ●    | ●  | ●     | ●  | ●  | ●  | ●     | ●  |    |    |      |    |    |       |    |  |
| 32        |                     |    |       |    |       |    |    |      | ○  | ○     | ○  | ○  | ○    | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| 38        |                     |    |       |    |       |    |    |      | ○  | ○     | ○  | ○  | ○    | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| 44        |                     |    |       |    |       |    |    |      |    | ○     | ○  | ○  | ○    | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| 51        |                     |    |       |    |       |    |    |      |    |       | ○  | ○  | ○    | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| 57        |                     |    |       |    |       |    |    |      |    |       |    | ○  | ○    | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| 64        |                     |    |       |    |       |    |    |      |    |       |    |    | ○    | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| Bore ref. | 11                  | 14 | 16    | 18 | 19    | 20 | 22 | 24   | 28 | 31    | 32 | 35 | 36   | 38 | 41    | 42 | 45 | 46 | 47    | 48 | 51 | 52 | 53   | 54 | 56 | 57    | 58 |  |

## BORE SIZES 6-BEAM COUPLINGS

RELIEVED


| Size      | ØB1, ØB2 +0.03/-0mm |    |       |    |       |    |    |      |    |       |    |    |      |    |       |    |    |    |       |    |    |    |      |    |    |       |    |  |
|-----------|---------------------|----|-------|----|-------|----|----|------|----|-------|----|----|------|----|-------|----|----|----|-------|----|----|----|------|----|----|-------|----|--|
|           | 2                   | 3  | 3.175 | 4  | 4.763 | 5  | 6  | 6.35 | 8  | 9.525 | 10 | 12 | 12.7 | 14 | 15.88 | 16 | 18 | 19 | 19.05 | 20 | 24 | 25 | 25.4 | 28 | 30 | 31.75 | 32 |  |
| 9         | ○                   | ●  | ●     | ●  | ●     |    |    |      |    |       |    |    |      |    |       |    |    |    |       |    |    |    |      |    |    |       |    |  |
| 13        |                     | ○  | ○     | ○  | ○     | ○  | ●  | ●    | ●  |       |    |    |      |    |       |    |    |    |       |    |    |    |      |    |    |       |    |  |
| 16        |                     | ○  | ○     | ○  | ○     | ○  | ○  | ○    | ○  | ○     | ○  | ○  | ○    | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| 19        |                     |    |       |    | ○     | ○  | ○  | ○    | ○  | ○     | ○  | ○  | ○    | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| 25        |                     |    |       |    |       | ○  | ○  | ○    | ○  | ○     | ○  | ○  | ○    | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| 32        |                     |    |       |    |       |    |    |      | ○  | ○     | ○  | ○  | ○    | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| 38        |                     |    |       |    |       |    |    |      |    | ○     | ○  | ○  | ○    | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| 44        |                     |    |       |    |       |    |    |      |    |       | ○  | ○  | ○    | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| 51        |                     |    |       |    |       |    |    |      |    |       |    | ○  | ○    | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| 57        |                     |    |       |    |       |    |    |      |    |       |    |    | ○    | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| 64        |                     |    |       |    |       |    |    |      |    |       |    |    |      | ○  | ○     | ○  | ○  | ○  | ○     | ○  | ○  | ○  | ○    | ○  | ○  | ○     | ○  |  |
| Bore ref. | 11                  | 14 | 16    | 18 | 19    | 20 | 22 | 24   | 28 | 31    | 32 | 35 | 36   | 38 | 41    | 42 | 45 | 46 | 47    | 48 | 51 | 52 | 53   | 54 | 56 | 57    | 58 |  |

○ B1 only    ● B1 & B2    ● Aluminium and Stainless Steel Only


# S-Beam Single Helix Beam Couplings - Stainless Steel



Set Screw Hubs

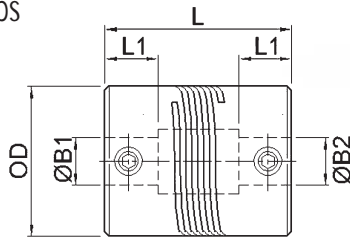

Clamp Hubs

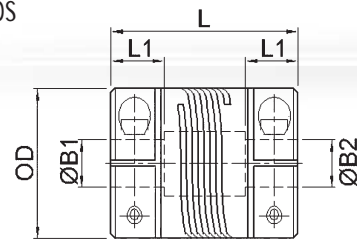

## DIMENSIONS & ORDER CODES

| Size | Set Screw Style | Clamp Style | Dimensions |      |              |               |        |        |             | Fasteners                  |           |           |             |
|------|-----------------|-------------|------------|------|--------------|---------------|--------|--------|-------------|----------------------------|-----------|-----------|-------------|
|      |                 |             | Order Code | O.D. | O/A Length L | Bore Depth L1 | Min B1 | Min B2 | Max B1 & B2 | Mass kg x 10 <sup>-3</sup> | Set Screw | Cap Screw | Torque (Nm) |
| 16   | 820.16          | -           | 15.9       | 20   | 6.0          | 3             | 4      | 6.35   | 25.6        | M4                         | -         | 1.05      | 2.0         |
|      | -               | 821.16      |            | 22   | 6.5          |               |        |        |             | 26.0                       | -         | M2.5      | 0.68        |
| 19   | 820.19          | -           | 19.1       | 20   | 6.0          | 4             | 4.76   | 8      | 35.8        | M4                         | -         | 1.05      | 2.0         |
|      | -               | 821.19      |            | 28   | 8.0          |               |        |        |             | 47.7                       | -         | M2.5      | 0.68        |
| 25   | 820.25          | -           | 25.4       | 24   | 7.5          | 5             | 6      | 10     | 78          | M5                         | -         | 2.10      | 2.5         |
|      | -               | 821.25      |            | 30   | 10.0         |               |        |        |             | 91                         | -         | M3        | 1.20        |
| 32   | 820.32          | -           | 31.8       | 30   | 10.0         | 6             | 8      | 16     | 152         | M6                         | -         | 3.75      | 3.0         |
|      | -               | 821.32      |            | 38   | 12.0         |               |        |        |             | 186                        | -         | M4        | 2.85        |
| 38   | 820.38          | -           | 38.1       | 50   | 16.0         | 8             | 12     | 19     | 365         | M6                         | -         | 3.75      | 3.0         |
|      | -               | 821.38      |            | 50   | 16.0         |               |        |        |             | 350                        | -         | M5        | 5.85        |
| 50   | 820.50          | -           | 50.8       | 54   | 18.0         | 10            | 16     | 26     | 680         | M8                         | -         | 9.00      | 4.0         |
|      | -               | 821.50      |            | 54   | 18.0         |               |        |        |             | 660                        | -         | M6        | 9.75        |

34

## PERFORMANCE

| Size | Peak Torque (Nm) | Max misalignment compensation |           |          | Nominal stiffness at std. bore size |                  |
|------|------------------|-------------------------------|-----------|----------|-------------------------------------|------------------|
|      |                  | Angular deg                   | Radial mm | Axial mm | Bore                                | Torsional Nm/rad |
| 16   | 1.2              | 5                             | 0.25      | 0.25     | 5                                   | 16               |
| 19   | 2.3              | 5                             | 0.25      | 0.25     | 6                                   | 33               |
| 25   | 4.3              | 5                             | 0.25      | 0.25     | 10                                  | 45               |
| 32   | 7.8              | 5                             | 0.25      | 0.25     | 12                                  | 84               |
| 38   | 20               | 5                             | 0.25      | 0.25     | 16                                  | 195              |
| 50   | 30               | 5                             | 0.25      | 0.25     | 20                                  | 320              |

## Materials & Finishes

Couplings: Stainless Steel 303 S31  
Fasteners: Stainless Steel

## Temperature Range

-40°C to +140°C

## AVAILABLE BORES

| Size     | +0.03/-0mm |       |    |       |    |    |       |       |    |    |       |    |    |        |    |    |        |    |        |    |    |    |   |
|----------|------------|-------|----|-------|----|----|-------|-------|----|----|-------|----|----|--------|----|----|--------|----|--------|----|----|----|---|
|          | 3          | 3.175 | 4  | 4.763 | 5  | 6  | 6.350 | 7.938 | 8  | 9  | 9.525 | 10 | 12 | 12.700 | 14 | 15 | 15.875 | 16 | 19.050 | 20 | 24 | 25 |   |
| 16       | ○          | ○     | ●  | ●     | ●  | ●  | ●     |       |    |    |       |    |    |        |    |    |        |    |        |    |    |    |   |
| 19       |            |       | ○  | ●     | ●  | ●  | ●     |       | ●  |    |       |    |    |        |    |    |        |    |        |    |    |    |   |
| 25       |            |       |    |       | ○  | ●  | ●     | ●     | ●  | ●  | ●     | ●  |    |        |    |    |        |    |        |    |    |    |   |
| 32       |            |       |    |       |    | ○  | ○     | ●     | ●  | ●  | ●     | ●  | ●  | ●      | ●  | ●  | ●      | ●  |        |    |    |    |   |
| 38       |            |       |    |       |    |    |       |       |    |    | ●     | ●  | ●  | ●      | ●  | ●  | ●      | ●  | ●      |    |    |    |   |
| 50       |            |       |    |       |    |    |       |       |    |    |       |    |    | ●      | ●  | ●  | ●      | ●  | ●      | ●  | ●  | ●  | ● |
| Bore Ref | 14         | 16    | 18 | 19    | 20 | 22 | 24    | 27    | 28 | 30 | 31    | 32 | 35 | 36     | 38 | 40 | 41     | 42 | 47     | 48 | 52 | 53 |   |

○ B1 only    ● B1 & B2




+44 (0) 1992 501900


# S-Beam Single Helix Beam Couplings - Aluminium



## Set Screw Hubs

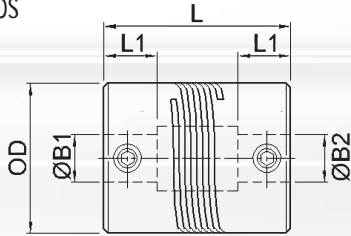

## Clamp Hubs

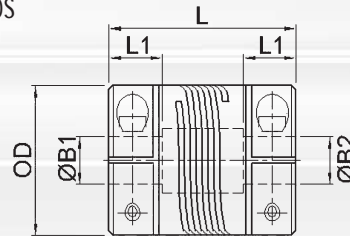

## DIMENSIONS & ORDER CODES

| Size | Set Screw Style | Clamp Style | Dimensions |      |              |               |        |        |             | Fasteners                  |           |           |             |
|------|-----------------|-------------|------------|------|--------------|---------------|--------|--------|-------------|----------------------------|-----------|-----------|-------------|
|      |                 |             | Order Code | O.D. | O/A Length L | Bore Depth L1 | Min B1 | Min B2 | Max B1 & B2 | Mass kg x 10 <sup>-3</sup> | Set Screw | Cap Screw | Torque (Nm) |
| 16   | 826.16          | -           | 15.9       | 20   | 6.0          | 3             | 4      | 6.35   | 8.8         | M4                         | -         | 2.27      | 2.0         |
|      | -               | 827.16      |            | 22   | 6.5          | 3             | 4      | 6.35   | 9.8         | -                          | M2.5      | 1.32      | 2.0         |
| 19   | 826.19          | -           | 19.1       | 20   | 6.0          | 4             | 4.76   | 8      | 13.1        | M4                         | -         | 2.27      | 2.0         |
|      | -               | 827.19      |            | 28   | 8.0          | 4             | 4.76   | 8      | 17.3        | -                          | M2.5      | 1.32      | 2.0         |
| 25   | 826.25          | -           | 25.4       | 24   | 7.5          | 5             | 6      | 10     | 28          | M5                         | -         | 4.62      | 2.5         |
|      | -               | 827.25      |            | 30   | 10.0         | 5             | 6      | 10     | 33          | -                          | M3        | 2.43      | 2.5         |
| 32   | 826.32          | -           | 31.8       | 30   | 10.0         | 6             | 8      | 16     | 55          | M6                         | -         | 7.61      | 3.0         |
|      | -               | 827.32      |            | 38   | 12.0         | 6             | 8      | 16     | 67          | -                          | M4        | 5.66      | 3.0         |
| 38   | 826.38          | -           | 38.1       | 50   | 16.0         | 8             | 12     | 19     | 127         | M6                         | -         | 7.61      | 3.0         |
|      | -               | 827.38      |            | 50   | 16.0         | 8             | 12     | 19     | 130         | -                          | M5        | 11.40     | 4.0         |
| 50   | 826.50          | -           | 50.8       | 54   | 18.0         | 10            | 16     | 26     | 241         | M8                         | -         | 18.36     | 4.0         |
|      | -               | 827.50      |            | 54   | 18.0         | 10            | 16     | 26     | 237         | -                          | M6        | 19.34     | 5.0         |

35

## PERFORMANCE

| Size | Peak Torque (Nm) | Max misalignment compensation |           |          | Nominal stiffness at std. bore size |                 |
|------|------------------|-------------------------------|-----------|----------|-------------------------------------|-----------------|
|      |                  | Angular deg                   | Radial mm | Axial mm | Bore                                | Torsional Nm/rd |
| 16   | 0.6              | 5                             | 0.25      | 0.25     | 5                                   | 6               |
| 19   | 1.1              | 5                             | 0.25      | 0.25     | 6                                   | 12              |
| 25   | 2.2              | 5                             | 0.25      | 0.25     | 10                                  | 17              |
| 32   | 4.1              | 5                             | 0.25      | 0.25     | 12                                  | 32              |
| 38   | 10               | 5                             | 0.25      | 0.25     | 16                                  | 70              |
| 50   | 15               | 5                             | 0.25      | 0.25     | 20                                  | 119             |

## Materials & Finishes

Couplings: Aluminium L 168 or better

Fasteners: Alloy steel, black oiled

## Temperature Range

-40°C to +120°C

## AVAILABLE BORES


| Size     | +0.03/-0mm |       |    |       |    |    |       |       |    |    |       |    |    |        |    |    |        |    |        |    |    |    |   |
|----------|------------|-------|----|-------|----|----|-------|-------|----|----|-------|----|----|--------|----|----|--------|----|--------|----|----|----|---|
|          | 3          | 3.175 | 4  | 4.763 | 5  | 6  | 6.350 | 7.938 | 8  | 9  | 9.525 | 10 | 12 | 12.700 | 14 | 15 | 15.875 | 16 | 19.050 | 20 | 24 | 25 |   |
| 16       | ○          | ○     | ●  | ●     | ●  | ●  | ●     |       |    |    |       |    |    |        |    |    |        |    |        |    |    |    |   |
| 19       |            |       | ○  | ●     | ●  | ●  | ●     |       | ●  |    |       |    |    |        |    |    |        |    |        |    |    |    |   |
| 25       |            |       |    |       | ○  | ●  | ●     | ●     | ●  | ●  | ●     | ●  |    |        |    |    |        |    |        |    |    |    |   |
| 32       |            |       |    |       |    | ○  | ○     | ●     | ●  | ●  | ●     | ●  | ●  | ●      | ●  | ●  | ●      |    |        |    |    |    |   |
| 38       |            |       |    |       |    |    |       |       |    |    | ●     | ●  | ●  | ●      | ●  | ●  | ●      | ●  |        |    |    |    |   |
| 50       |            |       |    |       |    |    |       |       |    |    |       |    |    | ●      | ●  | ●  | ●      | ●  | ●      | ●  | ●  | ●  | ● |
| Bore Ref | 14         | 16    | 18 | 19    | 20 | 22 | 24    | 27    | 28 | 30 | 31    | 32 | 35 | 36     | 38 | 40 | 41     | 42 | 47     | 48 | 52 | 53 |   |

○ B1 only    ● B1 & B2


# Step-Beam Step Beam Couplings - Nylon



Set Screw Hubs

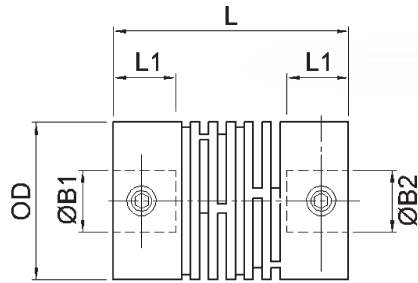

Clamp Hubs

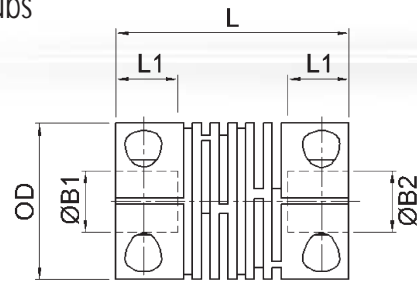

## DIMENSIONS & ORDER CODES

| Size | Set Screw Style | Clamp Style | Dimensions |              |                    |          |          |                | Fasteners |           |              |          |
|------|-----------------|-------------|------------|--------------|--------------------|----------|----------|----------------|-----------|-----------|--------------|----------|
|      | Order Code      |             | O.D.       | O/A Length L | Max Shaft Depth L1 | Min Bore | Max Bore | Mass kg x 10-3 | Set Screw | Cap Screw | Torque (Ncm) | A/F (mm) |
| 13   | 636.13          | -           | 13         | 18           | 5.0                | 3        | 6.35     | 3.0            | M2        | -         | 0.08         | 0.9      |
|      | -               | 637.13      |            |              |                    |          |          |                | -         | M2        | 0.23         | 1.5      |
| 19   | 636.19          | -           | 19         | 28           | 8.0                | 3        | 9.53     | 7.5            | M3        | -         | 0.32         | 1.5      |
|      | -               | 637.19      |            |              |                    |          |          |                | -         | M2.5      | 0.51         | 2.0      |
| 25   | 636.25          | -           | 25         | 36           | 10.0               | 6        | 12.7     | 17.4           | M4        | -         | 1.05         | 2.0      |
|      | -               | 637.25      |            |              |                    |          |          |                | -         | M3        | 0.90         | 2.5      |

36

## PERFORMANCE

| Size | Peak Torque (Nm) | Torsional Stiffness (Nm/rad) | Max misalignment / displacement |           |          |
|------|------------------|------------------------------|---------------------------------|-----------|----------|
|      |                  |                              | Angular deg                     | Radial mm | Axial mm |
| 13   | 0.25             | 5.5                          | 3                               | 0.15      | 0.2      |
| 19   | 0.8              | 12.0                         | 4                               | 0.15      | 0.2      |
| 25   | 2.5              | 18.0                         | 5                               | 0.3       | 0.3      |

## AVAILABLE BORES

| Size     | +0.05/-0mm |       |    |       |    |    |       |       |    |       |    |    |        |
|----------|------------|-------|----|-------|----|----|-------|-------|----|-------|----|----|--------|
|          | 3          | 3.175 | 4  | 4.763 | 5  | 6  | 6.350 | 7.938 | 8  | 9.525 | 10 | 12 | 12.700 |
| 13       | ●          | ●     | ●  | ●     | ●  | ●  | ●     |       |    |       |    |    |        |
| 19       |            |       | ●  | ●     | ●  | ●  | ●     | ●     | ●  | ●     |    |    |        |
| 25       |            |       |    |       |    | ●  |       | ●     | ●  | ●     | ●  | ●  | ●      |
| Bore Ref | 14         | 16    | 18 | 19    | 20 | 22 | 24    | 27    | 28 | 31    | 32 | 35 | 36     |

## Materials & Finishes

Couplings: Nylon type engineering polymer  
Fasteners: Stainless Steel




## Temperature Range

-20°C to +150°C

# drive couplings

- Flexible Double Loop
- Flexible Jaw (Spider)
- Magnetic


General purpose couplings for light power drives.




# Flex - G Flexible Jaw Coupling

Huco Flexible Jaw Couplings utilise the flexibility and resilience of a polyurethane element between aluminium hubs. This combination allows high torque to be transmitted with little or no back-lash, even where there is significant angular and/or parallel misalignment.



- Zero / Low backlash
- Rated up to 17Nm Torque
- Choice of 3 polyurethane elements

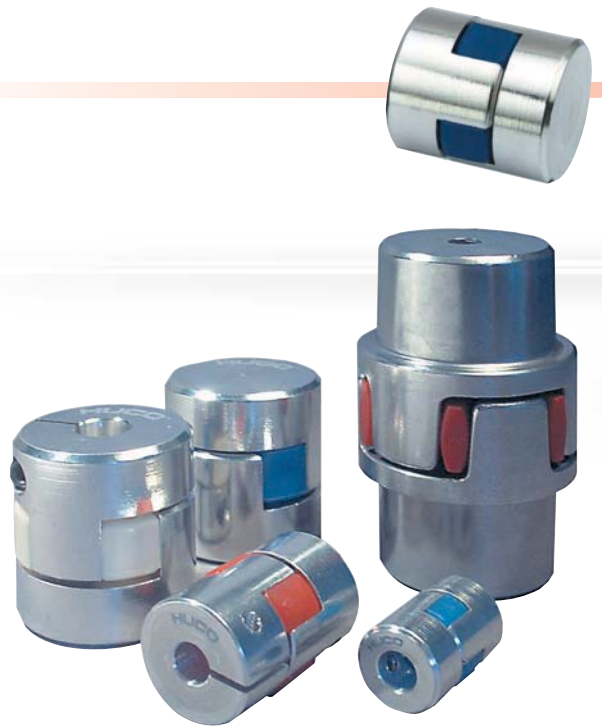



## Set Screw Hubs



## Thro' Clamp Hubs




## Pilot Hubs



User-adaptable for special needs e.g. fitting within tubes. Blank hubs are supplied centred with no provision for fastening. External dimensions identical with blind hubs. Except size 40 which has 6.35 pilot hole.

## Elements

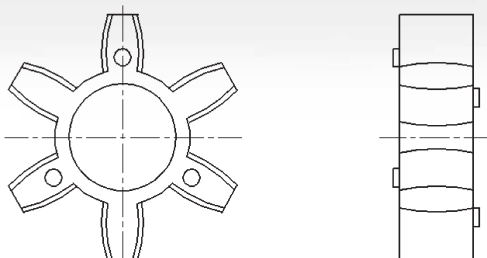

Polyurethane elements are available with three hardness levels; hard, standard and soft which exhibit different operating characteristics. Other features of polyurethane are:

- Resistance to oils, grease and many solvents
- Good atmospheric and chemical resistance
- Excellent shock and vibration damping

# Flex - G Flexible Jaw Coupling



## DIMENSIONS & ORDER CODES

| Coupling Size | Set Screw Style | Clamping Style | Pilot Hub | ØD   | L    | L1   | L2   | ØB1 max | Fasteners <sup>②</sup> |              |              | Moment of inertia<br>kgm <sup>2</sup><br>x 10 <sup>-3</sup> | Mass<br>kg<br>x 10 <sup>-3</sup> | Soft<br>(Blue) | Med<br>(White) | Hard<br>(Red) |
|---------------|-----------------|----------------|-----------|------|------|------|------|---------|------------------------|--------------|--------------|---|----------------------------------|----------------|----------------|---------------|
|               |                 |                |           |      |      |      |      |         | Screw                  | Torque<br>Nm | Wrench<br>mm |   |                                  |                |                |               |
|               |                 |                |           |      |      |      |      |         | HUB REF                |              |              |   |                                  |                |                |               |
| 14            | 802.14          | -              | -         | 14.0 | 22.0 | 7.0  | 8.0  | 6.35    | M3                     | 0.94         | 1.5          | 18.4  | 7.0                              | 804.14         | 805.14         | 806.14        |
|               | -               | 803.14         | -         |      |      |      |      |         | M2.5                   | 1.32         | 2.5          |   |                                  |                |                |               |
|               | -               | -              | 800.14    |      |      |      |      |         | -                      | -            | -            |   |                                  |                |                |               |
| 20            | 802.20          | -              | -         | 20.0 | 30.0 | 10.0 | 10.0 | 9.0     | M3                     | 0.94         | 1.5          | 106.0   | 17.0                             | 804.20         | 805.20         | 806.20        |
|               | -               | 803.20         | -         |      |      |      |      |         | M3                     | 2.43         | 2.5          |   |                                  |                |                |               |
|               | -               | -              | 800.20    |      |      |      |      |         | -                      | -            | -            |   |                                  |                |                |               |
| 30            | 802.30          | -              | -         | 30.0 | 35.0 | 11.0 | 13.0 | 14.0    | M4                     | 2.27         | 2.0          | 606.0   | 51.0                             | 804.30         | 805.30         | 806.30        |
|               | -               | 803.30         | -         |      |      |      |      |         | M3                     | 2.43         | 2.5          |   |                                  |                |                |               |
|               | -               | -              | 800.30    |      |      |      |      |         | -                      | -            | -            |   |                                  |                |                |               |
| 40            | 802.40          | -              | -         | 40.0 | 66.0 | 25.0 | 16.0 | 16.0    | M5                     | 4.62         | 2.5          | 4230.0  | 108.0                            | 804.40         | 805.40         | 806.40        |
|               | -               | 803.40         | -         |      |      |      |      |         | M4                     | 5.66         | 3.0          |   |                                  |                |                |               |
|               | -               | -              | 800.40    |      |      |      |      |         | -                      | -            | -            |   |                                  |                |                |               |

## PERFORMANCE (AT 20°C)

| Coupling Size | Spider Rigidity Duro <sup>⑦</sup> | Misalignment |                               | Speed R.P.M.<br>max | Torsional <sup>⑤</sup> |                   | Backlash Free Torque<br>Nm | Torque Nominal <sup>④</sup><br>Nm | Torque Max<br>Nm       |
|---------------|-----------------------------------|--------------|-------------------------------|---------------------|------------------------|-------------------|----------------------------|-----------------------------------|------------------------|
|               |                                   | Angular deg  | Radial mm                     |                     | Rate deg/Nm            | Stiffness Nm/rad  |                            |                                   |                        |
|               |                                   | 14           | 80 Blue<br>92 White<br>98 Red |                     | 2                      | 0.10              |                            |                                   |                        |
| 20            | 80 Blue<br>92 White<br>98 Red     | 2            | 0.15                          | 28000               | 3.37<br>2.05<br>1.22   | 17<br>28<br>47    | 0.45                       | 1.80<br>2.93<br>4.85              | 3.60<br>6.00<br>9.70   |
| 30            | 80 Blue<br>92 White<br>98 Red     | 2            | 0.20                          | 19000               | 1.24<br>0.40<br>0.25   | 71<br>143<br>228  | 1.00                       | 3.95<br>7.33<br>12.40             | 7.90<br>14.60<br>24.80 |
| 40            | 80 Blue<br>92 White<br>98 Red     | 2            | 0.38                          | 14000               | 0.34<br>0.17<br>0.10   | 170<br>344<br>573 | 2.40                       | 4.85<br>9.80<br>16.70             | 9.70<br>19.60<br>33.40 |

- ① Maximum permissible hub penetration
- ② Maximum recommended tightening torque
- ③ Values apply to complete couplings with max. bores
- ④ Nominal Torque. Select a size where Nominal Torque exceeds application torque x service factor (see page 6)
- ⑤ Values apply at 50% nominal torque, measured shaft to shaft with largest standard bores
- ⑥ Hubs can be provided with keyways or 'D' bores
- ⑦ Spider Durometer is shore 'A' hardness

## STANDARD BORES

| Coupling Size | +0.03/-0mm |       |    |       |    |    |       |    |       |    |    |        |    |    |        |    |
|---------------|------------|-------|----|-------|----|----|-------|----|-------|----|----|--------|----|----|--------|----|
|               | 3          | 3.175 | 4  | 4.763 | 5  | 6  | 6.350 | 8  | 9.525 | 10 | 12 | 12.700 | 14 | 15 | 15.875 | 16 |
| 14            | ●          | ●     | ●  | ●     | ●  | ●  | ●     |    |       |    |    |        |    |    |        |    |
| 20            |            |       | ●  | ●     | ●  | ●  | ●     |    |       |    |    |        |    |    |        |    |
| 30            |            |       |    |       |    | ●  | ●     | ●  | ●     | ●  | ●  | ●      | ●  |    |        |    |
| 40            |            |       |    |       |    |    |       | ●  | ●     | ●  | ●  | ●      | ●  | ●  | ●      | ●  |
| Bore ref.     | 14         | 16    | 18 | 19    | 20 | 22 | 24    | 28 | 31    | 32 | 35 | 36     | 38 | 40 | 41     | 42 |




## Materials & Finishes

Hub sizes 14 - 30: Al. Alloy 2024  
 Hub size 40: Cast Aluminium LM9  
 Membranes: Polyurethane  
 Fastener: Alloy steel, black oiled

## Temperature Range

-40°C to +80°C  
 For short durations up to 100°C

# Flex - P Double Loop Flexible Coupling



## DIMENSIONS & ORDER CODES

| Size | steel zinc plated hubs | stainless steel hubs | Dimensions   |                  |             |           |                            | Fasteners |             |          |
|------|------------------------|----------------------|--------------|------------------|-------------|-----------|----------------------------|-----------|-------------|----------|
|      | Order Code             |                      | Max Diameter | Length L +/- 1.0 | Bore length | Max Bores | Mass kg x 10 <sup>-3</sup> | Size      | Torque (Nm) | A/F (mm) |
| 10   | 047.10                 | -                    | 27           | 27               | 7.9         | 9.53      | 25                         | M3        | 0.94        | 1.5      |
|      | -                      | 049.10               |              |                  |             |           |                            |           | 0.32        |          |
| 20   | 047.20                 | -                    | 48           | 48               | 12.7        | 12.7      | 92                         | M4        | 2.27        | 2.0      |
|      | -                      | 049.20               |              |                  |             |           |                            |           | 2.0         |          |
| 30   | 047.30                 | -                    | 54           | 55               | 16.0        | 16.0      | 124                        | M5        | 4.62        | 2.5      |
|      | -                      | 049.30               |              |                  |             |           |                            |           | 2.1         |          |
| 40   | 047.40                 | -                    | 56           | 56               | 16.0        | 16.0      | 136                        | M6        | 7.61        | 3.0      |
|      | -                      | 049.40               |              |                  |             |           |                            |           | 3.75        |          |
| 40*  | -                      | 050.40               | 56           | 56               | 16.0        | 16.0      | 136                        | M6        | 7.61        | 3.0      |

40

## PERFORMANCE

| Size | Max Torque 1 (Nm) | Max Torque 2 (Nm) | max misalignment/displacement |           |              |
|------|-------------------|-------------------|-------------------------------|-----------|--------------|
|      |                   |                   | Angular deg                   | Radial mm | Axial +/- mm |
| 10   | 0.5               | 0.8               | 10                            | 2.6       | 4.5          |
| 20   | 1.8               | 3                 | 15                            | 3.2       | 7.5          |
| 30   | 5                 | 8                 | 15                            | 3.2       | 8.5          |
| 40   | 10                | 18                | 15                            | 3.2       | 11           |
| 40*  | 2.5               | 4.5               | 15                            | 3.2       | 11           |

Torque 1 = torque at maximum displacement  
 Torque 2 = torque at 1 deg. angular, 2mm axial and 0.5mm radial displacement

## Materials & Finishes

**Hubs:** Steel 230M07 pb Zn plated + clear passivate or  
 Stainless Steel 303 S31 natural finish  
**Flexing Element:** Hytrel  
**Fastener:** Steel Hub: Alloy steel, black oiled  
 Stainless Steel Hub: stainless steel

## Temperature Range

-40°C to +100°C


## Maximum Rotational Speed

3000 rev/min

## STANDARD BORES\*

| Size     | +0.05/-0mm |       |    |       |    |    |       |       |    |       |    |    |        |    |    |        |    |
|----------|------------|-------|----|-------|----|----|-------|-------|----|-------|----|----|--------|----|----|--------|----|
|          | 3          | 3.175 | 4  | 4.763 | 5  | 6  | 6.350 | 7.938 | 8  | 9.525 | 10 | 12 | 12.700 | 14 | 15 | 15.875 | 16 |
| 10       | ●          | ●     | ●  | ●     | ●  | ●  | ●     | ●     | ●  | ●     | ●  |    |        |    |    |        |    |
| 20       |            |       |    |       |    | ●  | ●     | ●     | ●  | ●     | ●  | ●  | ●      |    |    |        |    |
| 30       |            |       |    |       |    |    |       |       |    | ●     | ●  | ●  | ●      | ●  | ●  | ●      | ●  |
| 40       |            |       |    |       |    |    |       |       |    | ●     | ●  | ●  | ●      | ●  | ●  | ●      | ●  |
| Bore Ref | 14         | 16    | 18 | 19    | 20 | 22 | 24    | 27    | 28 | 31    | 32 | 35 | 36     | 38 | 40 | 41     | 42 |

\* Couplings with dissimilar bores are non-standard



- High Energy Rare Earth Magnets
- Smooth Running
- Overload protection to 110%
- Torsionally soft
- Electrical / Mechanical / Chemical isolation
- Stainless Steel Hubs Type 416

## DIMENSIONS & ORDER CODES


| Size | Stainless Steel Hub<br>Order Code | Dimensions |              |                     |               |           |          |                             | Fasteners          |              |               |
|------|-----------------------------------|------------|--------------|---------------------|---------------|-----------|----------|-----------------------------|--------------------|--------------|---------------|
|      |                                   | O.D.       | O/A Length L | Recommended Air Gap | Hub Length L1 | Hub Dia D | Max Bore | Mass* kg x 10 <sup>-3</sup> | Size Metric Inch** | Torque (Nm)  | A/F (mm) inch |
| 40   | MTD.40                            | 44         | 35           | 4.75                | 15.0          | 20.6      | 8        | 0.11                        | M4<br>#8-32        | 1.05<br>0.95 | 2.0<br>5/64   |
| 50   | MTD.50                            | 50         | 35           | 4.75                | 15.0          | 28.5      | 12.7     | 0.17                        | M5<br>#10-32       | 2.1<br>2     | 2.5<br>3/32   |
| 60   | MTD.60                            | 60         | 43           | 4.75                | 19.8          | 38.1      | 19.0     | 0.30                        | M5<br>#10-32       | 2.1<br>2     | 2.5<br>3/32   |
| 70   | MTD.70                            | 73         | 56           | 4.75                | 25.4          | 51.0      | 25.4     | 0.58                        | M5<br>#10-32       | 2.1<br>2     | 2.5<br>3/32   |

## PERFORMANCE

| Size | Max Running Torque (Nm) | Slip Torque (Nm) | max misalignment/displacement |           |
|------|-------------------------|------------------|-------------------------------|-----------|
|      |                         |                  | Angular deg                   | Radial mm |
| 40   | 0.34                    | 0.45             | 3                             | 6.35      |
| 50   | 0.68                    | 0.79             | 3                             | 6.35      |
| 60   | 1.02                    | 1.13             | 3                             | 6.35      |
| 70   | 1.81                    | 2.15             | 3                             | 6.35      |

\*half coupling \*\* metric bores supplied with metric screws

## TORQUE VS. AIR GAP

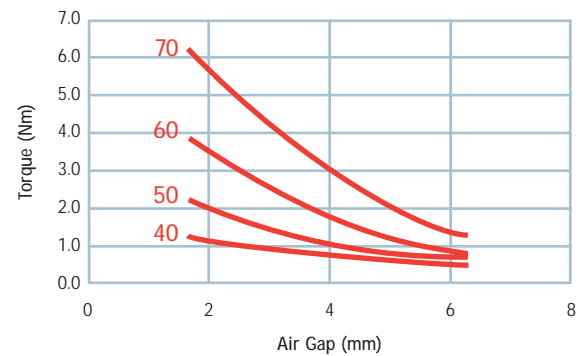

## STANDARD BORES

| Size     | +0.05/-0mm |    |     |      |       |    |    |      |    |        |    |       |        |      |
|----------|------------|----|-----|------|-------|----|----|------|----|--------|----|-------|--------|------|
|          | 3.175      | 5  | 6   | 6.35 | 7.938 | 10 | 11 | 12.7 | 14 | 15.875 | 19 | 19.05 | 22.225 | 25.4 |
| 40       | ●          | ●  | ●   | ●    | ●     |    |    |      |    |        |    |       |        |      |
| 50       |            |    | ●   | ●    | ●     | ●  | ●  | ●    |    |        |    |       |        |      |
| 60       |            |    |     |      |       |    | ●  | ●    | ●  | ●      | ●  | ●     |        |      |
| 70       |            |    |     |      |       |    |    | ●    | ●  | ●      | ●  | ●     | ●      | ●    |
| Bore Ref | 14         | 20 | 122 | 24   | 27    | 32 | 33 | 36   | 38 | 42     | 46 | 47    | 50     | 53   |

Also available unbored - use bore code 0000

---

## You can now...

Download or order catalogues

•  
Download our *Designer's Guide to Precision Shaft Couplings*

•  
Find a distributor in your area

•  
Read the latest product news

•  
Browse detailed information on all Huco products

•  
Search for products by order code or keyword



@

[www.huco.com](http://www.huco.com)

# plastic universal joints and teleshafts

- Backlash-free up to  $10^8$  turns
- Low mass
- Low inertia
- Corrosion resistant
- Electrically isolating
- No maintenance

Huco-Pol is a range of light duty, backlash-free universal joints and teleshafts manufactured of acetal and non-ferrous metals.

They are suitable for intermittent applications where low mass, corrosion resistance and electrical isolation are desirable.



Huco-Pol joints and teleshafts have only a fraction of the torque capability of steel joints and are not intended to substitute for these in the normal way.

Huco-Pols are used in business machines, food processing plant, laboratory equipment and electro-medical apparatus among others.

Alternative polymers are available for high temperature operation.



# Huco - Pol Plastic Universal Joints

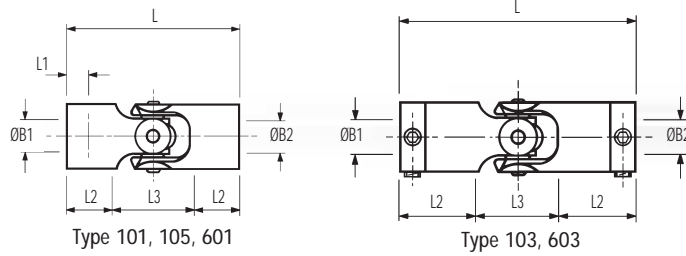

## SINGLE JOINTS - DIMENSIONS & ORDER CODES

| Size | ①<br>Brass<br>Cross-piece | ②<br>Plastic<br>Cross-piece | Dimensions |      |      |      |      |               |   |                               | Fasteners |                |             |
|------|---------------------------|-----------------------------|------------|------|------|------|------|---------------|---|-------------------------------|-----------|----------------|-------------|
|      |                           |                             | OD         | L    | L1   | L2   | L3   | B1, B2<br>Max | Moment of<br>inertia kgm <sup>2</sup><br>x 10 <sup>-8</sup> | Mass kg<br>x 10 <sup>-3</sup> | Size      | Torque<br>(Nm) | A/F<br>(mm) |
| 06   | 101.06                    | -                           | 7.1        | 19.1 | 3.3  | 5.3  | 8.6  | 4.76          | 0.3   | 0.7                           | -         | -              | -           |
|      | -                         | 601.06                      |            |      |      |      |      |               | 0.2   | 0.4                           | -         | -              | -           |
|      | 103.06                    | -                           |            | 27.2 | -    | 9.3  |      | 3.18          | 1.1   | 3.1                           | M3        | 0.94           | 1.5         |
|      | -                         | 603.06                      |            |      |      |      |      |               | 1.0   | 2.8                           | -         | -              | -           |
| 09   | 101.09                    | -                           | 11.1       | 28.5 | 4.3  | 8.6  | 11.4 | 6.35          | 4.0   | 2.7                           | -         | -              | -           |
|      | -                         | 601.09                      |            |      |      |      |      |               | 4.0   | 1.5                           | -         | -              | -           |
|      | 103.09                    | -                           |            | 37.6 | -    | 13.1 |      | 5.0           | 13.5  | 9.3                           | M3        | 0.94           | 1.5         |
|      | -                         | 603.09                      |            |      |      |      |      |               | 12.6  | 8.1                           | -         | -              | -           |
| 13   | 101.13                    | -                           | 14.3       | 35.6 | 5.6  | 10.4 | 14.8 | 8.0           | 14.3  | 5.7                           | -         | -              | -           |
|      | -                         | 601.13                      |            |      |      |      |      |               | 11.9  | 3.6                           | -         | -              | -           |
|      | 103.13                    | -                           |            | 46.2 | -    | 15.7 |      | 6.35          | 44.6  | 17.7                          | M3        | 0.94           | 1.5         |
|      | -                         | 603.13                      |            |      |      |      |      |               | 38.0  | 15.6                          | -         | -              | -           |
| 16   | 101.16                    | -                           | 17.5       | 53.3 | 8.9  | 15.2 | 23.0 | 11.0          | 32.3  | 12.2                          | -         | -              | -           |
|      | -                         | 601.16                      |            |      |      |      |      |               | 18.3  | 5.0                           | -         | -              | -           |
|      | 103.16                    | -                           |            | 67.6 | -    | 22.3 |      | 10.0          | 136   | 35.0                          | M4        | 2.27           | 2.0         |
|      | -                         | 603.16                      |            |      |      |      |      |               | 122   | 31.4                          | -         | -              | -           |
| 20   | 105.20                    | -                           | 23.0       | 62.0 | 8.0  | 17.0 | 28.0 | 12.7          | 147   | 25.7                          | -         | -              | -           |
| 25   | 105.25                    | -                           | 28.5       | 74.0 | 10.0 | 20.0 | 34.0 | 14            | 463   | 56                            | -         | -              | -           |
| 32   | 105.32                    | -                           | 36.5       | 86.0 | 10.0 | 21.0 | 44.0 | 20            | 1339  | 103                           | -         | -              | -           |

44

## SINGLE JOINTS - PERFORMANCE (at 20°C)

| Size | Brass Cross-piece 101, 103, 105 |                           |                          |                                  | Plastic Cross-piece 601, 603 |                           |                          |                                  | Max<br>angular<br>compensation<br>@<br>1000 rev/min | Max axial<br>loading N |
|------|---------------------------------|---------------------------|--------------------------|----------------------------------|------------------------------|---------------------------|--------------------------|----------------------------------|---|------------------------|
|      | Peak Torque<br>Nm               | Static Break<br>Torque Nm | Torsional Rate<br>deg/Nm | Torsional<br>Stiffness<br>Nm/Rad | Peak Torque<br>Nm            | Static Break<br>Torque Nm | Torsional Rate<br>deg/Nm | Torsional<br>Stiffness<br>Nm/Rad |   |                        |
| 06   | 0.11                            | 0.45                      | 19.7                     | 2.9                              | 0.09                         | 0.3                       | 22                       | 2.6                              | 45  | 18                     |
| 09   | 0.36                            | 1.9                       | 6.8                      | 8.4                              | 0.6                          | 1.5                       | 6.8                      | 8.4                              | 45  | 38                     |
| 13   | 0.85                            | 4.5                       | 3.2                      | 18                               | 0.7                          | 2.5                       | 3.6                      | 16.0                             | 45  | 67                     |
| 16   | 1.6                             | 6.8                       | 1.7                      | 34                               | 1.0                          | 5.0                       | 2.8                      | 20.0                             | 45  | 98                     |
| 20   | 2.8                             | 17                        | 0.94                     | 61                               | -                            | -                         | -                        | -                                | 40  | 138                    |
| 25   | 5.6                             | 34                        | 0.51                     | 112                              | -                            | -                         | -                        | -                                | 40  | 222                    |
| 32   | 10.7                            | 72                        | 0.25                     | 229                              | -                            | -                         | -                        | -                                | 40  | 334                    |

FOR STANDARD BORES SEE FACING PAGE

## Materials & Finishes

- Bodies: Acetal
- Cross-pieces: Brass BS 2874 CZ121 (101, 103, 109, 111)  
Nylon Glass filled (601, 603, 609, 611)
- Bore Inserts: Brass BS 2874 CZ121 (103, 111, 603, 611)  
Al. Alloy 2014A T6 or AIECO 62 Sn T9 (105)
- Fasteners: Alloy steel, black oiled


## Operating Temperature Range

- 20°C to +60°C

## Maximum Rotational Speed

1000 rev/min

# Huco - Pol Plastic Universal Joints

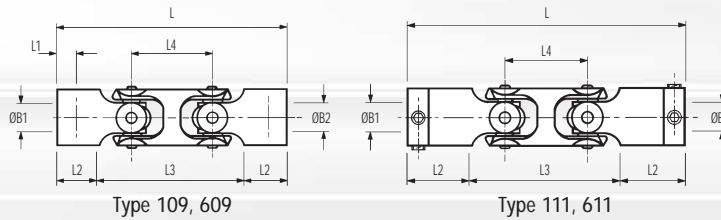

## DOUBLE JOINTS - DIMENSIONS & ORDER CODES

| Size | Cross-piece |           | Dimensions |      |     |      |      |      |            |   |                            | Fasteners |             |          |
|------|-------------|-----------|------------|------|-----|------|------|------|------------|---|----------------------------|-----------|-------------|----------|
|      | ① Brass     | ② Plastic | OD         | L    | L1  | L2   | L3   | L4   | B1, B2 Max | Moment of inertia kgm <sup>2</sup> x 10 <sup>-8</sup> | Mass kg x 10 <sup>-3</sup> | Size      | Torque (Nm) | A/F (mm) |
|      | Hub Ref     |           |            |      |     |      |      |      |            |   |                            |           |             |          |
| 06   | 109.06      | -         | 7.1        | 27.2 | 3.3 | 5.3  | 16.7 | 8.1  | 4.76       | 0.6   | 1.1                        | -         | -           | -        |
|      | -           | 609.06    |            |      |     |      |      |      |            | 0.4   | 0.6                        |           |             |          |
|      | 111.06      | -         |            | 35.3 | -   | 9.3  |      |      | 3.18       | 1.3   | 3.5                        | M3        | 0.94        | 1.5      |
|      | -           | 611.06    |            |      |     |      |      |      |            | 1.1   | 3.0                        |           |             |          |
| 09   | 109.09      | -         | 11.1       | 41.7 | 4.3 | 8.6  | 24.6 | 13.2 | 6.35       | 5.9   | 4.5                        | -         | -           | -        |
|      | -           | 609.09    |            |      |     |      |      |      |            | 5.8   | 2.0                        |           |             |          |
|      | 111.09      | -         |            | 50.8 | -   | 13.1 |      |      | 5.0        | 15.3  | 11.1                       | M3        | 0.94        | 1.5      |
|      | -           | 611.09    |            |      |     |      |      |      |            | 14.0  | 8.6                        |           |             |          |
| 13   | 109.13      | -         | 14.3       | 51.4 | 5.6 | 10.4 | 30.7 | 15.9 | 8.0        | 23.7  | 9.6                        | -         | -           | -        |
|      | -           | 609.13    |            |      |     |      |      |      |            | 21.5  | 7.5                        |           |             |          |
|      | 111.13      | -         |            | 62.1 | -   | 15.7 |      |      | 6.35       | 50.4  | 21.6                       | M3        | 0.94        | 1.5      |
|      | -           | 611.13    |            |      |     |      |      |      |            | 50.4  | 15.6                       |           |             |          |
| 16   | 109.16      | -         | 17.5       | 75.5 | 8.9 | 15.2 | 45.2 | 22.2 | 11.0       | 63.5  | 19.7                       | -         | -           | -        |
|      | -           | 609.16    |            |      |     |      |      |      |            | 35.5  | 12.5                       |           |             |          |
|      | 111.16      | -         |            | 89.8 | -   | 22.3 |      |      | 10.0       | 178.0   | 42.4                       | M4        | 2.27        | 2.0      |
|      | -           | 611.16    |            |      |     |      |      |      |            | 150.0   | 35.2                       |           |             |          |

## SINGLE JOINTS - PERFORMANCE (at 20°C)

| Size | Brass Cross-piece 109, 111 |                        |                       |                            | Plastic Cross-piece 609, 611 |                        |                       |                            | Max angular compensation @ 1000 rev/min | Max radial compensation mm |
|------|----------------------------|------------------------|-----------------------|----------------------------|------------------------------|------------------------|-----------------------|----------------------------|---|----------------------------|
|      | Peak Torque Nm             | Static Break Torque Nm | Torsional Rate deg/Nm | Torsional Stiffness Nm/Rad | Peak Torque Nm               | Static Break Torque Nm | Torsional Rate deg/Nm | Torsional Stiffness Nm/Rad |   |                            |
| 06   | 0.08                       | 0.34                   | 81.9                  | 0.7                        | 0.08                         | 0.3                    | 115                   | 0.5                        | 90                                      | 5.6                        |
| 09   | 0.16                       | 1.9                    | 13.3                  | 4.3                        | 0.16                         | 1.5                    | 17.3                  | 3.3                        | 90                                      | 9.1                        |
| 13   | 0.59                       | 3.4                    | 8.1                   | 7.1                        | 0.59                         | 2.5                    | 10.4                  | 5.5                        | 90                                      | 10.9                       |
| 16   | 1.3                        | 6.8                    | 4.5                   | 12.6                       | 1.0                          | 5.0                    | 7.5                   | 7.6                        | 90                                      | 15.5                       |

## STANDARD BORES

| Size     | Bore tolerances 101, 601, 109, 609 = +0.04/-0.0mm • 103, 603, 111, 611 = +0.03/-0.0mm |       |    |       |    |    |       |    |       |    |    |        |    |        |    |    |    |        |    |   |
|----------|---|-------|----|-------|----|----|-------|----|-------|----|----|--------|----|--------|----|----|----|--------|----|---|
|          | 3   | 3.175 | 4  | 4.763 | 5  | 6  | 6.350 | 8  | 9.525 | 10 | 12 | 12.700 | 14 | 15.875 | 16 | 18 | 19 | 19.050 | 20 |   |
| 06       | ●   | ●     | ●  | ●     |    |    |       |    |       |    |    |        |    |        |    |    |    |        |    |   |
| 09       | ○   | ○     | ●  | ●     | ●  | ●  | ●     |    |       |    |    |        |    |        |    |    |    |        |    |   |
| 13       |   |       | ○  | ○     | ○  | ●  | ●     | ●  |       |    |    |        |    |        |    |    |    |        |    |   |
| 16       |   |       |    |       |    | ○  | ○     | ●  | ●     | ●  |    |        |    |        |    |    |    |        |    |   |
| 20       |   |       |    |       |    |    |       | ○  | ○     | ○  |    | ○      |    |        |    |    |    |        |    |   |
| 25       |   |       |    |       |    |    |       |    |       | ○  | ○  | ○      |    |        |    |    |    |        |    |   |
| 32       |   |       |    |       |    |    |       |    |       |    |    |        | ○  | ○      | ○  | ○  | ○  | ○      | ○  | ○ |
| Bore Ref | 14  | 16    | 18 | 19    | 20 | 22 | 24    | 28 | 31    | 32 | 35 | 36     | 38 | 41     | 42 | 45 | 46 | 47     | 48 |   |

● Moulded bores only ○ Sleeved bores only ● Moulded or sleeved bores available



## Constant velocity


The velocity ratio of single universal joints is not constant when the working angle is greater than zero. Their geometry gives rise to sinusoidal fluctuations at the output that increase with the working angle and which vary between:

$$\omega \cos \beta \text{ and } \omega \sec \beta$$

where  $\omega$  = angular velocity  
and  $\beta$  = operating angle

For example, when the operating angle is 5°, the maximum error is  $\pm 0.4\%$ ; at 7° it is  $\pm 0.8\%$ , and at 10° it is  $\pm 1.5\%$ . A motor shaft turning at a constant 1000 rpm, driving through a single universal joint set at an operating angle of 5°, produces an output that fluctuates between 996 rpm and 1004 rpm twice each revolution.

The fluctuations are cancelled out when using a double joint or two single joints connected back to back.

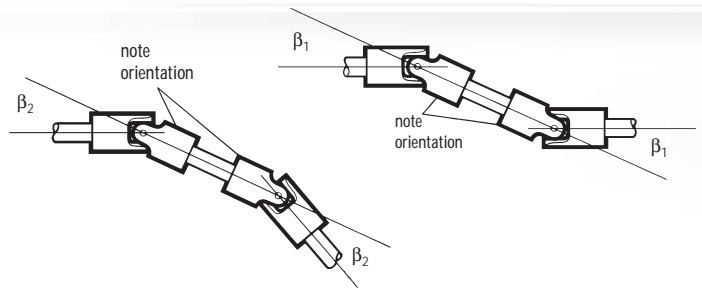

To maintain constant velocity ratio, ensure that:

- The orientation of two single joints is correct; the inboard forks should align as in double joints.
- The working angle of both joints, or both halves of a double joint, is the same.

## ADJUSTED TORQUE

Peak torque values apply when the working angle is zero. Adjusted torque takes account of dynamic loading at the bearings. To find adjusted torque, determine application speed, torque and operating angle,

Then:

- multiply speed x working angle
- subtract the result from 10000
- divide the answer into 10000
- apply the result to the application torque.



eg. speed = 400 rpm  
application torque = 0.1Nm  
working angle = 20°

Accordingly:

- 400 rpm x 20° = 8000
- 10000 - 8000 = 2000
- 10000 / 2000 = 5
- 5 x 0.1Nm = 0.5Nm

Select a joint where Peak Torque exceeds 0.5Nm, ie., size 13 or larger.

Note: To remain within the capacity of the joint, the result of speed x working angle must be less than 10000.

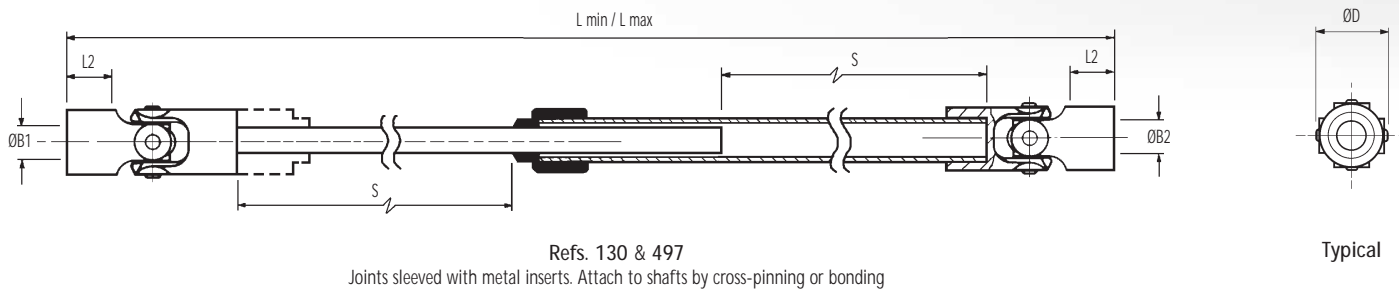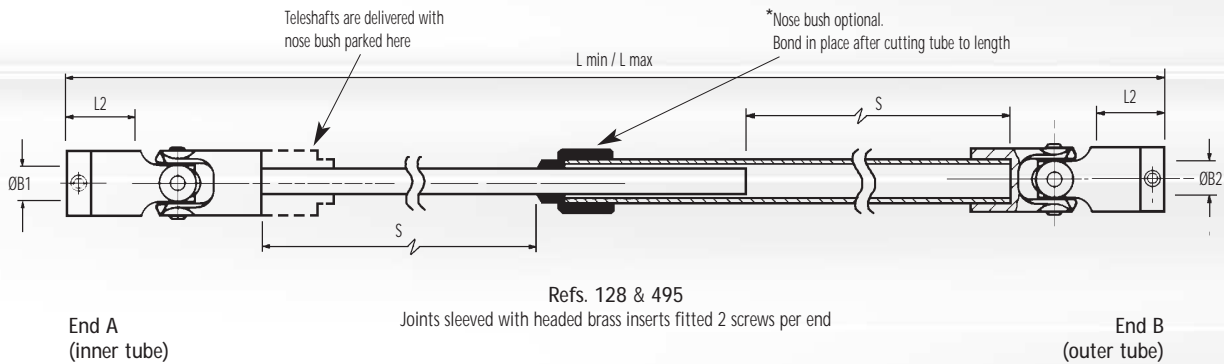

## DIMENSIONS & ORDER CODES

| Teleshafes size | Teleshafes options               |                                    | ØD   | L   | L   | Stroke | L2   | ØB1, ØB2 max | Mass kg x 10 <sup>-3</sup> | Corresponding joints. For dimensions see |
|-----------------|----------------------------------|------------------------------------|------|-----|-----|--------|------|--------------|----------------------------|--|
|                 | Standard tubes self-colour brass | Wear-resistant tubes Niflor coated |      |     |     |        |      |              |                            |  |
|                 | teleshafes REF                   |                                    |      |     |     |        |      |              |                            |  |
| 09              | 128.09.240                       | 495.09.240                         | 11.1 | 240 | 389 | 149    | 13.1 | 5            | 36                         | 103.09                                   |
| 13              | 128.13.300                       | 495.13.300                         | 14.3 | 300 | 484 | 184    | 15.7 | 6.35         | 58                         | 103.13                                   |
| 16              | 128.16.450                       | 495.16.450                         | 17.5 | 450 | 730 | 280    | 22.3 | 10           | 168                        | 103.16                                   |
| 20              | 130.20.464                       | 497.20.464                         | 23.0 | 464 | 745 | 281    | 17.0 | 12.70        | 241                        | 105.20                                   |
| 25              | 130.25.500                       | 497.25.500                         | 28.5 | 500 | 784 | 284    | 20.0 | 14           | 457                        | 105.25                                   |
| 32              | 130.32.564                       | 497.32.564                         | 36.5 | 564 | 868 | 304    | 21.0 | 20           | 827                        | 105.32                                   |

① Niflor is a proprietary PTFE impregnated electroless nickel plating process.

② Max shaft penetration

③ Values apply with max bores.

• A range of standard telescopes is available which can be shortened to achieve an infinite number of length/stroke requirements. The lengths L min shown in the table above are the longest of the standard range in each size. Specific lengths are produced by cutting an equal amount from both ends of the nearest standard size. See next page for recommended procedure.

• Custom Teleshafes assemblies can be factory made subject to minimum order quantities.


• \*The nose bush eliminates any torsional free play that may be apparent in the tubes due to working clearances.

• Full details of the standard range and product order codes are available on request. Please ask for a Huco Teleshafes data sheet.

## STANDARD BORES

| Teleshafes size            | ØB1, ØB2 +0.03 / -0mm |    |       |     |    |       |     |       |     |    |        |        |     |        |     |  |
|----------------------------|-----------------------|----|-------|-----|----|-------|-----|-------|-----|----|--------|--------|-----|--------|-----|--|
|                            | 3.175                 | 4  | 4.763 | 5   | 6  | 6.350 | 8   | 9.525 | 10  | 12 | 12.700 | 15.875 | 16  | 19.050 | 20  |  |
| 09                         | ●                     | ●  | ●     | ●   |    |       |     |       |     |    |        |        |     |        |     |  |
| 13                         |                       | ●  | ●     | ●   | ●  | ●     |     |       |     |    |        |        |     |        |     |  |
| 16                         |                       |    |       |     | ●  | ●     | ●   | ●     | ●   |    |        |        |     |        |     |  |
| 20                         |                       |    |       |     |    |       |     | ●     | ●   |    |        |        |     |        |     |  |
| 25                         |                       |    |       |     |    |       |     |       |     | ●  | ●      |        |     |        |     |  |
| 32                         |                       |    |       |     |    |       |     |       |     |    |        | ●      | ●   | ●      | ●   |  |
| Bore ref.                  | 16                    | 18 | 19    | 20  | 22 | 24    | 28  | 31    | 32  | 35 | 36     | 41     | 42  | 47     | 48  |  |
| Corresponding bore adaptor |                       |    |       | 251 |    | 253   | 255 |       | 257 |    | 259    |        | 260 |        | 261 |  |

Diameters for which a bore adaptor is shown can be adapted to smaller shaft sizes. See page 56 for details.




Extensible drive shafts (teleshfts), are useful when the distance between actuator and load varies during operation, or needs to accommodate component variances, or when a quick disconnect facility is needed in the drive line.

Huco teleshfts are in keeping with the light duty capabilities of plastics universal joints and employ precision drawn square brass tubes as the

telescoping medium. These can easily be cut by the user to provide an extensible drive shaft with customised dimensions.

There are 2 ways to arrive at a customised teleshft: empirically (shown below), or with tables that provide all necessary data on stroke and tube lengths for teleshfts with and without nose bushes up to 520mm retracted length.

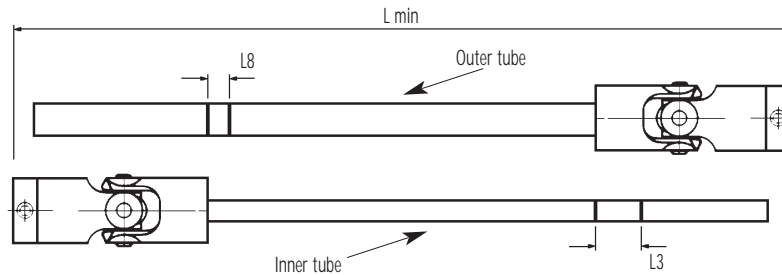

| Size | L3   | L8   |
|------|------|------|
| 09   | 8.6  | 3.2  |
| 13   | 10.4 | 4.3  |
| 16   | 15.2 | 6.1  |
| 20   | 17.0 | 8.2  |
| 25   | 20.0 | 10.3 |
| 32   | 21.0 | 18.0 |

## Empirical method (based on the retracted length).



- Disengage the teleshft, remove the nose bush parked on the inner tube and keep it in case you need to use it later. Then lay the 2 halves of the teleshft side by side.
- Slide one half alongside the other so that overall length  $L_{min}$  matches the intended length of the teleshft when *fully retracted*. With a felt tip pen, draw a line across the outer tube at the point where this is level with the inboard end of the universal joint.
- If you are sure that the teleshft will satisfactorily extend the required amount, cut the tube at the line.
- Mark the inner tube in the same way, then add an amount equivalent to dimension L3 for your teleshft size and draw a second line. Cut the tube at this second line.

- Now re-engage the tubes, taking care to orientate them correctly so that the inboard forks of the joints are in the same plane, and retract the teleshft. The overall length should be as intended, and both tubes should bottom out simultaneously.
- If required, the nose bush can now be fitted by bonding it to the outer tube with an instant adhesive, (factory fitted bushes are retained by a barbing technique). The bush will add an amount equivalent to dimension L8 to the retracted length. Cutting this amount from the outer tube will reinstate the intended retracted length.
- The purpose of the nose bush is to eliminate any torsional free play that may be apparent in the tubes due to working clearances.

48

## How to order customised teleshfts

Please specify your teleshft by completing the questionnaire.

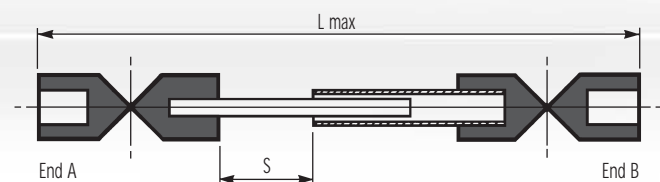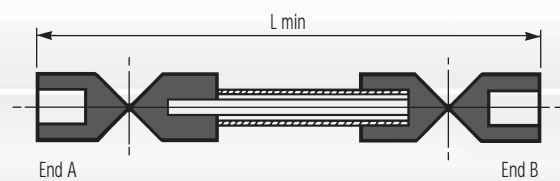

Teleshft size  09  13  16  20  25  32

Teleshft ref.  128  130  495  497

Bore diameter End A .....

Bore diameter End B .....

Fitted nose bush (end B only)

Speed of rotation  rpm

Please specify:

L min ..... and/or

L max ..... and/or

Stroke S .....

If more than one parameter is specified, which one is critical? .....

Please quote ..... pcs

Projected annual qtys ..... pcs

# adjustable friction clutches

Huco Vari-Tork are rotary friction devices with adjustable drag or slip torque. Controlled slip takes place between the hub and housing whenever the load exceeds the set torque.

- Three sizes - up to 3Nm torque capacity
- 4 interface styles
- Set screw or clamp connection
- Compact proportions
- Use as a torque limiter, tensioning, or overrun device

The construction is simple and robust and comprises a series of steel clutch plates engaging a hub and a series of friction rings engaging a housing. Pressure is brought to bear on the plates and friction rings by an adjuster acting through a spring and pressure plate. The load can be connected to either the steel inner hub or the aluminium alloy housing.

As a torque limiter, Vari-Tork interrupts continuity between power source and load when this reaches a pre-determined level.


As a tensioning device, Vari-Tork typically maintains tension in a filament or tape winding operation by exerting drag on the feed spool.

As an overrun device, Vari-Tork absorbs residual inertia of a motor when the load is braked or reaches a terminal stop.







## Size 16 Set Screw Shaft Fixing




## Size 25 Set Screw Shaft Fixing




Ref. 271 (2 plate)  
279 (6 plate)  
Basic clutch (thro' bore)



Ref. 273 (2 plate)  
281 (6 plate)  
Basic clutch + sleeve adaptor




Ref. 277 (2 plate)  
285 (6 plate)  
Basic clutch + Oldham (set screw) coupling




Ref. 267 (2 plate)  
269 (6 plate)  
Basic clutch + Oldham (clamp) coupling


## Size 25 Clamp Shaft Fixing




Ref. 401 (2 plate)  
409 (6 plate)  
Basic clutch (thro' bore)



Ref. 403 (2 plate)  
411 (6 plate)  
Basic clutch + sleeve adaptor




Ref. 407 (2 plate)  
415 (6 plate)  
Basic clutch + Oldham (set screw) coupling




Ref. 397 (2 plate)  
399 (6 plate)  
Basic clutch + Oldham (clamp) coupling


## Size 48 Set Screw Shaft Fixing




Ref. 279  
Basic Clutch (thro' bore)



Ref. 281  
Basic Clutch + sleeve adaptor

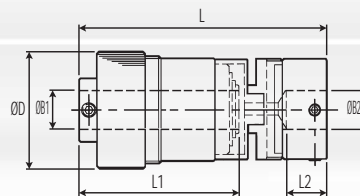

Ref. 285  
Basic Clutch + Oldham (set screw) coupling

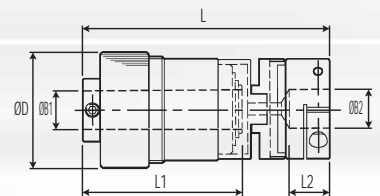

Ref. 269  
Basic Clutch + Oldham (clamp) coupling

## Materials & Finishes

Housing, adjuster ring, adaptors: Al. Alloy AEICO 62Sn T9  
Irridite NCP finish

Hub: Steel, heat treated

Clutch plates: Size 25 Steel, heat treated  
Size 48 Brass

Bearings: Sintered bronze

Fasteners: Alloy steel, black oiled

# Vari-Tork Adjustable Friction Clutches



## DIMENSIONS & ORDER CODES

| Size & Model  | Set Screw Hub | Clamp Hub | ØD   | L     | L1    | L2   | ØB1 max | Fasteners at B1 end |           |           | ØB2 max | Fasteners at B2 end |           |           | Max drag torque Ncm | Moment of inertia kgm <sup>2</sup> x 10 <sup>-8</sup> | Mass kg x 10 <sup>-3</sup> |
|---------------|---------------|-----------|------|-------|-------|------|---------|---------------------|-----------|-----------|---------|---------------------|-----------|-----------|---------------------|---|----------------------------|
|               |               |           |      |       |       |      |         | Screw               | Torque Nm | Wrench mm |         | Screw               | Torque Nm | Wrench mm |                     |   |                            |
|               |               |           |      |       |       |      |         |                     |           |           |         |                     |           |           |                     |   |                            |
| 16            | 311.16        | -         | 16.0 | 26.0  | 5.0   | 7.0  | 4       | M3                  | 0.94      | 1.5       | 4       | M3                  | 0.94      | 1.5       | 0.5                 | 30  | 14                         |
| 25<br>2-PLATE | 267.25        | -         | 25.8 | 46.5  | 25.0  | 8.6  | 8       | M3                  | 0.94      | 1.5       | 12      | M3                  | 2.43      | 2.5       | 53                  | 416   | 58                         |
|               | 271.25        | -         |      | 26.4  | thro' | -    |         |                     |           |           | -       | -                   | -         | -         |                     | 242   | 37                         |
|               | 273.25        | -         |      | 36.0  | 25.0  | 9.0  |         |                     |           |           | 12      | M4                  | 2.27      | 2         |                     | 382   | 50                         |
|               | 277.25        | -         |      | 46.5  | 25.0  | 8.6  |         |                     |           |           | 12      | M4                  | 2.27      | 2         |                     | 425   | 58                         |
|               | -             | 397.25    | 25.8 | 54.5  | 33.0  | 8.6  | 12      | M3                  | 2.43      | 2.5       | 12      | M3                  | 2.43      | 2.5       | 53                  | 508   | 68                         |
|               | -             | 401.25    |      | 34.4  | thro' | -    | -       | -                   | -         | -         | 317     | 47                  |           |           |                     |   |                            |
|               | -             | 403.25    |      | 44.0  | 33.0  | 9.0  | 12      | M4                  | 2.27      | 2         | 441     | 60                  |           |           |                     |   |                            |
|               | -             | 407.25    |      | 54.5  | 33.0  | 8.6  | 12      | M4                  | 2.27      | 2         | 511     | 69                  |           |           |                     |   |                            |
| 25<br>6-PLATE | 269.25        | -         | 25.8 | 53.4  | 31.0  | 8.6  | 8       | M3                  | 0.94      | 1.5       | 12      | M3                  | 2.43      | 2.5       | 132                 | 529   | 68                         |
|               | 279.25        | -         |      | 32.4  | thro' | -    |         |                     |           |           | -       | -                   | -         | 312       |                     | 48  |                            |
|               | 281.25        | -         |      | 42.5  | 31.0  | 9.0  |         |                     |           |           | 12      | M4                  | 2.27      | 2         |                     | 451   | 60                         |
|               | 285.25        | -         |      | 53.4  | 31.0  | 8.6  |         |                     |           |           | 12      | M4                  | 2.27      | 2         |                     | 516   | 69                         |
|               | -             | 399.25    | 25.8 | 60.8  | 39.0  | 8.6  | 12      | M3                  | 2.43      | 2.5       | 12      | M3                  | 2.43      | 2.5       | 132                 | 617   | 79                         |
|               | -             | 409.25    |      | 40.7  | thro' | -    | -       | -                   | -         | 381       | 58      |                     |           |           |                     |   |                            |
|               | -             | 411.25    |      | 50.3  | 39.0  | 9.0  | 12      | M4                  | 2.27      | 2         | 530     | 71                  |           |           |                     |   |                            |
|               | -             | 415.25    |      | 60.8  | 39.0  | 8.6  | 12      | M4                  | 2.27      | 2         | 590     | 80                  |           |           |                     |   |                            |
| 48<br>6-PLATE | 269.48        | -         | 48.0 | 102.0 | 65.0  | 16.7 | 16      | M6                  | 7.60      | 3.0       | 20      | M4                  | 5.66      | 3         | 300                 | 8037  | 390                        |
|               | 279.48        | -         |      | 65.0  | thro' | -    |         |                     |           |           | -       | -                   | -         | 5548      |                     | 278   |                            |
|               | 281.48        | -         |      | 83.0  | 65.0  | 16.0 |         |                     |           |           | 20      | M5                  | 4.62      | 2.5       |                     | 7135  | 350                        |
|               | 285.48        | -         |      | 102.0 | 65.0  | 16.7 |         |                     |           |           | 20      | M5                  | 4.62      | 2.5       |                     | 8037  | 390                        |

## PERFORMANCE DATA

| Size  | Size 16  | Size 25              | Size 48  |
|---|----------|----------------------|----------|
| Power dissipation at 20°C<br>2-PLATE<br>6-PLATE | 0.5 watt | 7 watts<br>8.6 watts | 14 watts |
| Backlash  | 0° max   | 2° max               | 2° max   |
| Max surface temperature                         | 80° C    | 80° C                | 80° C    |
| Max speed continuous slip                       | 1000 rpm | 1000 rpm             | 600 rpm  |

## STANDARD BORES


|         |                            | ØB1, ØB2 + 0.03/-0mm |    |       |       |     |       |     |    |        |    |        |     |    |    |        |     |
|---------|----------------------------|----------------------|----|-------|-------|-----|-------|-----|----|--------|----|--------|-----|----|----|--------|-----|
|         |                            | 4                    | 6  | 6.350 | 7.938 | 8   | 9.525 | 10  | 12 | 12.700 | 14 | 15.875 | 16  | 18 | 19 | 19.050 | 20  |
| Size 16 | At B1 end                  | ●                    |    |       |       |     |       |     |    |        |    |        |     |    |    |        |     |
|         | At B1 end                  | ●                    |    |       |       |     |       |     |    |        |    |        |     |    |    |        |     |
| Size 25 | At B1 end                  |                      | ●  | ●     | ●     | ●   |       |     |    |        |    |        |     |    |    |        |     |
|         | At B2 end                  |                      | ●  | ●     | ●     | ●   | ●     | ●   | ●  |        |    |        |     |    |    |        |     |
| Size 48 | At B1 end                  |                      |    |       |       | ●   | ●     | ●   | ●  | ●      | ●  | ●      | ●   |    |    |        |     |
|         | At B1 end                  |                      |    |       |       |     | ●     | ●   | ●  | ●      | ●  | ●      | ●   | ●  | ●  | ●      | ●   |
|         | Bore ref.                  | 22                   | 22 | 24    | 27    | 28  | 31    | 32  | 35 | 36     | 38 | 41     | 42  | 45 | 46 | 47     | 48  |
|         | Corresponding bore adaptor |                      |    | 253   |       | 255 |       | 257 |    | 259    |    |        | 260 |    |    |        | 261 |

Diameters for which a bore adaptor is shown can be adapted to smaller shaft sizes. See page 56 for details




## How to install Vari-Tork


**BASIC CLUTCH – REFS. 271, 279, 401 & 409**  
Controlled slip occurs between pulley and shaft.

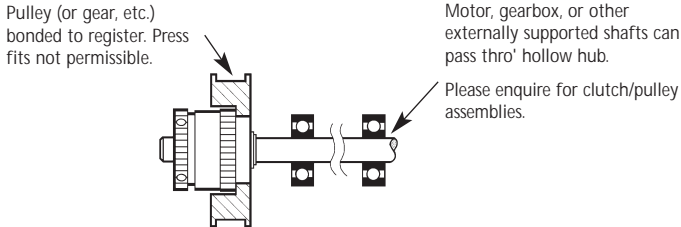

**BASIC CLUTCH + SLEEVE ADAPTOR – REFS. 273, 281, 403 & 411**  
Controlled slip occurs between LH & RH shafts. Clutch orientation not important, supported shaft may be entered either end.

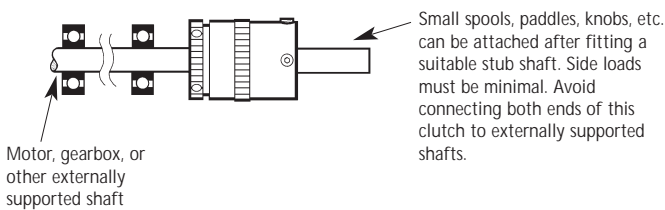


**BASIC CLUTCH + FLEXIBLE COUPLING - REFS. 267, 269, 277, 285, 397, 399, 407 & 415** Controlled slip occurs between LH & RH shafts.

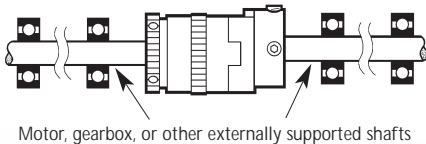


52

## Locking ring

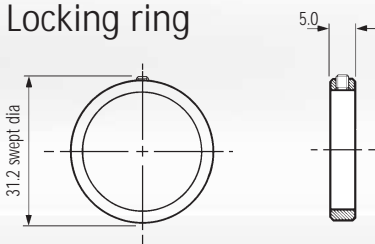


order ref.

294.25



Fit locking ring flush with end of housing as shown. Lightly tension locking screw to secure the adjuster.  
Wrench size 1.5

## Construction - Size 25 Vari-Tork

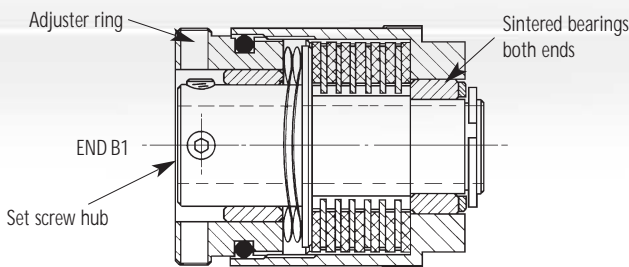

Sectional view of 6-plate Vari-Tork Ref. 279.25 Shafts are secured by set screws accessed through radial holes in the adjuster ring.

## Vari-Tork characteristics

The characteristics of dry plate clutches favour those applications which can tolerate relatively imprecise drag torques. Three tendencies should be noted:

### BREAKAWAY TORQUE

After a period during which no slipping has taken place, the breakaway torque can be up to 2<sup>1/2</sup> times the set value.

### TORQUE DECAY

There is an inverse relationship between clutch temperature and slipping torque. The slipping torque reduces from the set value as the power being dissipated causes the clutch temperature to rise. When slipping continuously, torque settles at approximately 70% of the value set on a new clutch and at approximately 80% of the value set on a used clutch. This characteristic is not speed-dependent.

### SPEED RELATED TORQUE FLUCTUATIONS

Variations in slipping speed cause a momentary increase in the prevailing output torque. The clutches behave more consistently at high speed/low torque than at low speed/high torque. High speed in this instance starts at approximately 500 rpm.

Where applications call for sustained slipping, the housing temperature should be maintained below 80°C. Clutches mounted concentrically within pulleys, gear wheels, etc. will be more effective at dissipating heat generated during slipping.

### CALCULATING FOR POWER DISSIPATION

Given the slipping speed in rpm and the drag torque in Nm, the following equation can be used for calculating the power dissipation in watts (W).

$$W = \frac{Nm \cdot rpm}{9.55}$$

## Locking ring


In some circumstances it is possible for the adjuster ring to unscrew during operation. The adjuster ring can be secured by fitting locking ring ref. 294.25.

## Removing the adjuster ring

- 1) If this should be necessary, be sure to replace the pressure plate first, then the spring washers. Ensure that the topmost friction ring is fully engaged with the splines. *A disengaged friction ring will cause the clutch to malfunction.*
- 2) To remove the adjuster ring, first remove the clamp. With set screw hubs the adjuster ring cannot be removed if the set screws protrude above the hub diameter. Flattening or dimpling of shafts is recommended and may be necessary with shafts larger than Ø6.35 to avoid the screws fouling the adjuster ring.

## Waved washers

Two waved washers are fitted to these clutches. In some instances, better torque control may result from removing one of them, particularly when working in the lower torque ranges.

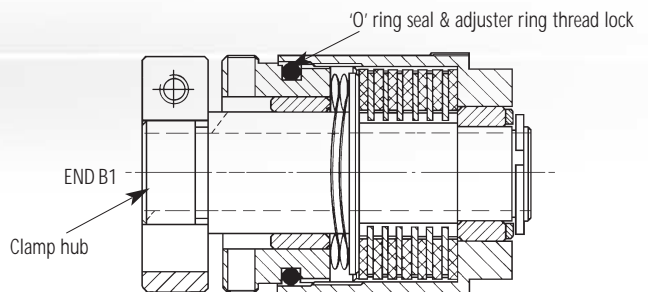

Sectional view of 6-plate Vari-Tork Ref. 409.25 Shafts are secured by a split hub and ring clamp method which does not score the shafts.

# bevel gearboxes

Huco L-Box miniaturised right-angle drives offer 2 alternative specifications to meet the need for a standard component with differing levels of application and economy.

Both models feature two counterbored clearance holes for conventional chassis mounting and a tapped insert below each shaft for vertical mounting. Both models have a 1:1 ratio. Max backlash 2°.

Gear cases are injection moulded in filled Nylon 6.6 for low moisture take-up, low thermal expansion and rigidity.

Huco T-Box miniaturised right-angle drives offer 2 ratios and 3 shaft configurations. Features include:

Straight cut bevel gears, case hardened and cross-pinned to shafts.

Double shielded carbon steel deep groove input bearings.

Aluminium carriers precisely size the sintered output bearings and maximise heat dissipation.

Gear case injection moulded in filled Nylon 6.6 for low moisture take up, low thermal expansion and rigidity.

Ground steel shafts throughout, treated for hardness, strength and corrosion resistance.


Lifetime lubrication enhanced by grease control ribs.



# Bevel Gearboxes



## Huco L-Box

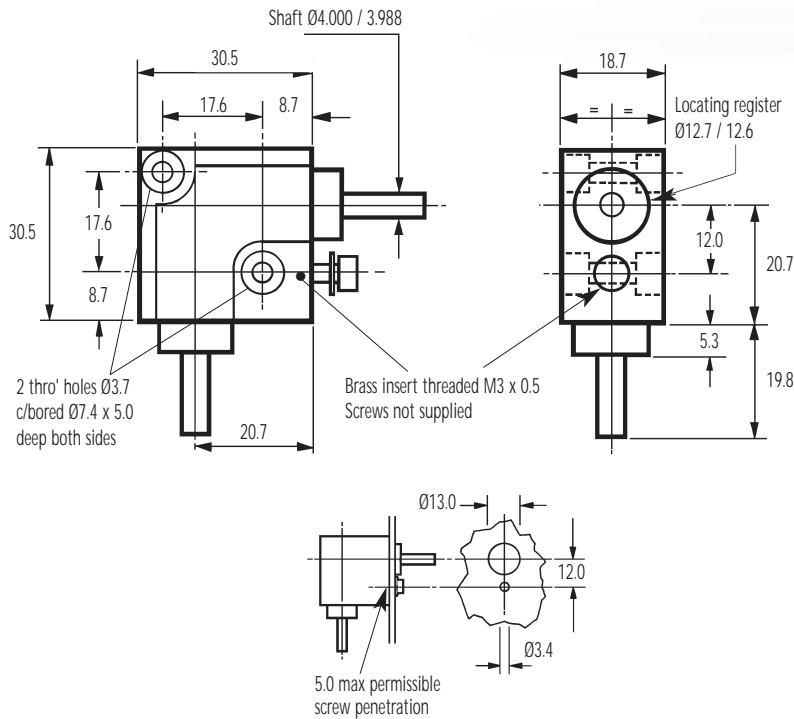

### HUCO L-BOX REF. 332.31.2

Hardened steel gears bonded to ground and hardened steel shafts. Sintered bronze bearing system. Gearbox and bearings lubricated for life.

Electrical isolation between shafts and housing.

Suitable for manual, and short term drive applications.

Max torque 0.68 Nm.

Mass 41 g.

### HUCO L-BOX REF. 333.31.3

Acetal gears moulded onto ground and hardened steel shafts. Sintered bronze bearing system. Gearbox and bearings lubricated for life.


Electrical isolation between input/output shafts and between shafts and housing.

Suitable for manual, and short term drive applications.

Max torque 0.11 Nm.

Mass 37 g.

## Huco T-Box

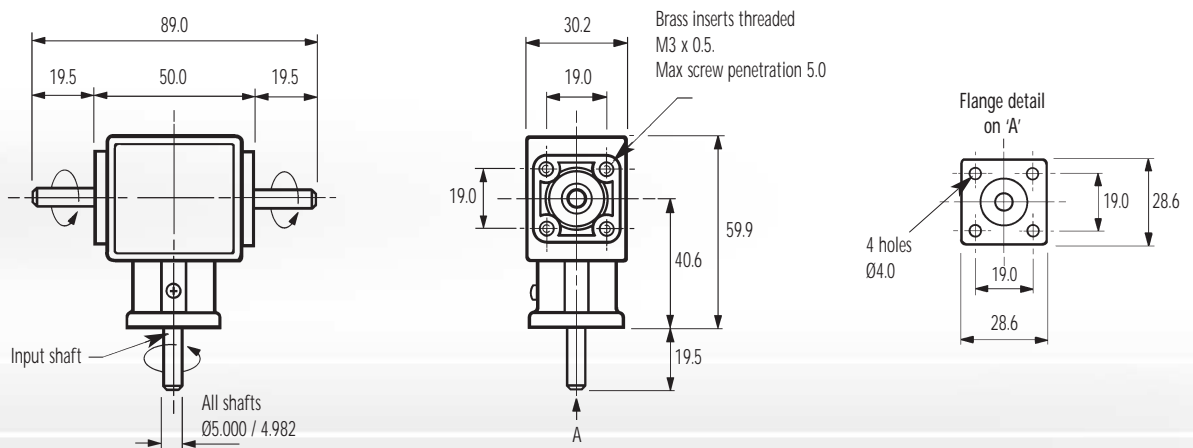

Alternative face mounting available (not shown). Please enquire for details

| Configuration | Total nr. of shafts | Max input speed | Max power kW | Max backlash | Output torque Nm | Ratio | Mass g | T-Box ref. |
|---------------|---------------------|-----------------|--------------|--------------|------------------|-------|--------|------------|
|               | 3                   | 1500 rpm        | 0.053        | 2°           | 0.34             | 1:1   | 115    | 335.50.11  |
|               |                     |                 |              |              | 0.68             | 2:1   | 130    | 335.50.12  |
|               | 2                   | 1500 rpm        | 0.053        | 2°           | 0.34             | 1:1   | 115    | 336.50.11  |
|               |                     |                 |              |              | 0.68             | 2:1   | 130    | 336.50.12  |
|               | 2                   | 1500 rpm        | 0.053        | 2°           | 0.34             | 1:1   | 115    | 337.50.11  |
|               |                     |                 |              |              | 0.68             | 2:1   | 130    | 337.50.12  |

To adapt shafts for larger bores, specify Huco-Lok adaptor 253.20 for Ø6.35 bores or 254.20 for Ø8 bores.

### CAUTION


Gears may bind if gearbox is dropped on either of its shafts. Avoid endwise blows to shafts.

# bore adaptors



Bore adaptors offer a convenient way of adapting a coupling to a variety of shaft diameters, typically at the R & D stage. A range of motor options, for example, can be accommodated with one coupling and a selection of Huco-Loks.

When fitted to set screw hubs, adaptors prevent the screws from scoring the shafts and permit repeated re-positioning and easy removal of the coupling.

The adaptors feature a feathered head which sits in the chamfer at the bore entry and prevents over-insertion.



# Huco-Lok Metallic (non insulating) & glass fibre (insulating) bore adaptors



Bore For optimum fastening, install HUCO-LOK bore adaptors as shown.

'S' represents screws in set screw hub.

'T' represents tangential screw in clamp hub.

'F' shows recommended orientation of flatted shaft in set screw hub.

56


Note that both traction and concentricity may be affected when using an adaptor. For best results shafts with h6 tolerance or better, are recommended. Undersized shafts become progressively less effective. For similar reasons, flatted shafts with more than 1/4 of their diameter removed are not recommended.

| Cat ref.           | 251          | 253    | *254   | 255    | 257             | 259    | 260    | 261    | 262    | 263    |
|--------------------|--------------|--------|--------|--------|-----------------|--------|--------|--------|--------|--------|
| ØD                 | 5            | 6.35   | 8      | 8      | 10              | 12.7   | 16     | 20     | 25.4   | 28     |
| L                  | 4.3          | 6.6    | 5.8    | 8.1    | 8.1             | 10.7   | 13.2   | 20     | 20     | 25     |
| to fit bores coded | 20           | 24     | 28     | 28     | 32              | 36     | 42     | 48     | 53     | 54     |
| minor ØB           | Adaptor ref. |        |        |        |                 |        |        |        |        |        |
| 2                  | 251.11       | 253.11 |        |        |                 |        |        |        |        |        |
| 3                  | 251.14       | 253.14 | 254.14 | 255.14 |                 |        |        |        |        |        |
| 3.048              | 251.15       | 253.15 | 254.15 | 255.15 |                 |        |        |        |        |        |
| 3.175              | 251.16       | 253.16 | 254.16 | 255.16 |                 |        |        |        |        |        |
| 4                  | 251.18       | 253.18 | 254.18 | 255.18 | 257.18          |        |        |        |        |        |
| 4.763              |              | 253.19 | 254.19 | 255.19 | 257.19          |        |        |        |        |        |
| 5                  |              | 253.20 | 254.20 | 255.20 | 257.20          | 259.20 |        |        |        |        |
| 6                  |              |        | 254.22 | 255.22 | 257.22          | 259.22 | 260.22 |        |        |        |
| 6.350              |              |        |        |        | 257.24          | 259.24 | 260.24 |        |        |        |
| 7                  |              |        |        |        | 257.25          | 259.25 | 260.25 |        |        |        |
| 7.938              |              |        |        |        | 257.27          | 259.27 | 260.27 | 261.27 |        |        |
| 8                  |              |        |        |        | 257.28          | 259.28 | 260.28 | 261.28 |        |        |
| 9                  |              |        |        |        |                 | 259.30 | 260.30 | 261.30 |        |        |
| 9.525              |              |        |        |        |                 | 259.31 | 260.31 | 261.31 | 262.31 |        |
| 10                 |              |        |        |        |                 | 259.32 | 260.32 | 261.32 | 262.32 |        |
| 11                 |              |        |        |        |                 |        | 260.33 | 261.33 | 262.33 |        |
| 12                 |              |        |        |        |                 |        | 260.35 | 261.35 | 262.35 | 263.35 |
| 12.700             |              |        |        |        |                 |        | 260.36 | 261.36 | 262.36 | 263.36 |
| 14                 |              |        |        |        |                 |        | 260.38 | 261.38 | 262.38 | 263.38 |
| 15                 |              |        |        |        |                 |        |        | 261.40 | 262.40 | 263.40 |
| 15.875             |              |        |        |        |                 |        |        | 261.41 | 262.41 | 263.41 |
| 16                 |              |        |        |        |                 |        |        | 261.42 | 262.42 | 263.42 |
| 18                 |              |        |        |        |                 |        |        | 261.45 | 262.45 | 263.45 |
| 19                 |              |        |        |        |                 |        |        |        | 262.46 | 263.46 |
| 19.050             |              |        |        |        |                 |        |        |        | 262.47 | 263.47 |
| 20                 |              |        |        |        |                 |        |        |        | 262.48 | 263.48 |
| 22                 |              |        |        |        |                 |        |        |        | 262.49 | 263.49 |
| 22.225             |              |        |        |        |                 |        |        |        | 262.50 | 263.50 |
| 24                 |              |        |        |        |                 |        |        |        |        | 263.51 |
| 25                 |              |        |        |        |                 |        |        |        |        | 263.52 |
| 25.400             |              |        |        |        |                 |        |        |        |        | 263.53 |
| material           | brass        |        |        |        | aluminium alloy |        |        |        |        |        |

Major diameter D is toleranced  $-0.013 / -0.050\text{mm}$   
 Minor diameter B is toleranced  $+0.03 / -0\text{mm}$

\* Short adaptor 254 is used with couplings as indicated in the standard bores tables. Use 255 for all other 8mm bores.

# Formulae and Conversion Factors for Motion Transfer



# Formulae and Conversion Factors

## SI base units

| Quantity                  | Unit Symbol | Name     |
|---------------------------|-------------|----------|
| length                    | m           | metre    |
| mass                      | kg          | kilogram |
| time                      | s           | second   |
| electric current          | A           | ampere   |
| Thermodynamic temperature | K           | kelvin   |
| luminous intensity        | cd          | candela  |

## letter symbols and SI units in power transmission engineering

| Symbol           | Quantity                                | SI Unit Symbol    | Name                   |
|------------------|---|-------------------|------------------------|
| <b>Mechanics</b> |   |                   |                        |
| E                | modulus of elasticity (Young's modulus) | Pa                | pascal                 |
| F                | force                                   | N                 | Newton                 |
| G (W)            | weight                                  | N                 | Newton                 |
| J                | moment of inertia                       | kgm <sup>2</sup>  | kilogram metre squared |
| M (T)            | torque                                  | Nm                | Newton metre           |
| m                | mass                                    | kg                | kilogram               |
| P                | power                                   | W                 | watt                   |
| p                | pressure                                | Pa                | pascal                 |
| ρ                | density (mass density)                  | kg/m <sup>3</sup> | -                      |
| σ                | stress                                  | Pa                | pascal                 |
| W (E)            | work (energy)                           | J                 | joule                  |
| η                | efficiency                              | 1                 | -                      |
| μ                | coefficient of friction                 | 1                 | -                      |

58

## Formulae

International System(SI)

Imperial System (FPS)

### power

| International System(SI)   | Imperial System (FPS)   |
|--|---|
| <b>Lifting motion</b><br>$P = \frac{m \cdot g \cdot v}{\eta \cdot 1000}$ | <b>Lifting motion</b><br>$P = \frac{W \cdot v}{\eta \cdot 33000}$ |
| <b>Linear motion</b><br>$P = \frac{F_r \cdot v}{1000}$                   | <b>Linear motion</b><br>$P = \frac{F_r \cdot v}{33000}$           |
| $F_r = \mu \cdot m \cdot g$  | $F_r = \mu \cdot W$   |
| <b>Rotary motion</b><br>$P = \frac{M \cdot n}{9550}$                     | <b>Rotary motion</b><br>$P = \frac{M \cdot n}{5250}$              |
| P - Power in kW  | P - Power in hp   |
| F <sub>r</sub> - Frictional resistance in N                              | F <sub>r</sub> - Frictional resistance in lbf                     |
| m - Mass in kg   | W - Weight in lb  |
| g - Acceleration of free fall (9.81) in m/s <sup>2</sup>                 | v - Velocity in ft/min  |
| v - Velocity in m/s  | η - Efficiency in decimals  |
| η - Efficiency in decimals   | μ - Coefficient of friction                                       |
| μ - Coefficient of friction  | M - Torque in lbf . ft  |
| M - Torque in Nm   | n - Rotational speed in rpm                                       |
| n - Rotational speed in 1/min or r/min                                   |   |

International System(SI)

Imperial System (FPS)

### torque

| International System(SI)               | Imperial System (FPS)        |
|--|------------------------------|
| $P = \frac{9550 \cdot P}{n}$           | $P = \frac{5250 \cdot P}{n}$ |
| M - Torque in Nm                       | M - Torque in lbf . ft       |
| F - Force in N                         | F - Force in lbf             |
| r - Radius of lever in m               | r - Radius of lever in ft    |
| P - Power in kW                        | P - Power in hp              |
| n - Rotational speed in 1/min or r/min | n - Rotational speed in rpm  |

### work

| International System(SI)                                 | Imperial System (FPS)                                 |
|--|---|
| $W = \frac{j \cdot n^2}{182.5}$                          | $W = \frac{WK^2 \cdot n^2}{5880}$                     |
| W - Work (energy) in Nm = Ws = J                         | W - Work (energy) in lb . ft                          |
| F - Force in N   | F - Force in lbf                                      |
| s - Length of path in m                                  | s - Length of path in ft                              |
| m - Mass in kg   |   |
| g - Acceleration of free fall (9.81) in m/s <sup>2</sup> |   |
| J - Moment of inertia in kgm <sup>2</sup>                | WK <sup>2</sup> -Flywheel effect lb . ft <sup>2</sup> |
| n - Rotational speed in 1/min or r/min                   | n - Rotational speed in rpm                           |

### acceleration or braking time

| International System(SI)                              | Imperial System (FPS)                                      |
|---|--|
| $t_a = \frac{J \cdot n}{9.55 \cdot M_a}$              | $t_a = \frac{WK^2 \cdot n}{308 \cdot M_a}$                 |
| t <sub>a</sub> - Acceleration or braking time in s    | t <sub>a</sub> - Acceleration or braking time in s         |
| J - Moment of inertia in kgm <sup>2</sup>             | WK <sup>2</sup> -Flywheel effect in kgm <sup>2</sup>       |
| n - Rotational speed in 1/min or r/min                | n - Rotational speed in rpm                                |
| M <sub>a</sub> - Acceleration or braking torque in Nm | M <sub>a</sub> - Acceleration or braking torque in lb . ft |

### moment of inertia

| International System(SI)   | Imperial System (FPS)   |
|--|---|
| <b>Solid Cylinder</b><br>$J = \frac{1}{2} \cdot m \cdot r_{ext}^2$<br>$= \frac{1}{32} \cdot 1000 \cdot \pi \cdot \rho \cdot l \cdot d_{ext}^4$<br>$= 98 \cdot \rho \cdot l \cdot d_{ext}^4$  | <b>Solid Cylinder</b><br>$WK^2 = \frac{1}{2} \cdot W \cdot r_{ext}^2$<br>$= \frac{\pi}{32} \cdot \rho \cdot l \cdot d_{ext}^4$<br>$= 0.1 \cdot \rho \cdot l \cdot d_{ext}^4$  |
| <b>Hollow Cylinder</b><br>$J = \frac{1}{2} \cdot m \cdot (r_{ext}^2 + r_{int}^2)$<br>$= \frac{1}{32} \cdot 1000 \cdot \pi \cdot \rho \cdot l \cdot (d_{ext}^4 - d_{int}^4)$<br>$= 98 \cdot \rho \cdot l \cdot (d_{ext}^4 - d_{int}^4)$ | <b>Hollow Cylinder</b><br>$WK^2 = \frac{1}{2} \cdot W \cdot (r_{ext}^2 + r_{int}^2)$<br>$= \frac{\pi}{32} \cdot \rho \cdot l \cdot (d_{ext}^4 - d_{int}^4)$<br>$= 0.1 \cdot \rho \cdot l \cdot (d_{ext}^4 - d_{int}^4)$ |

### torsional stiffness and resonant frequency

$$C_T \leq \frac{(F_R \times 2 \pi)^2}{\left(\frac{1}{J_M} + \frac{1}{J_L}\right)} \quad FR \leq \frac{1}{2 \pi} \times \sqrt{\left(\frac{1}{J_M} + \frac{1}{J_L}\right)} \times C_T$$

Where  
 C<sub>T</sub> = torsional stiffness (Nm/rad);  
 J<sub>M</sub> = motor inertia (kgm<sup>2</sup>)  
 F<sub>R</sub> = resonant frequency (Hz)  
 J<sub>L</sub> = load inertia (kgm<sup>2</sup>)

# Formulae and Conversion Factors

## force

|            |   | N                     | kp                    | p                  | tonf (UK)              | lbf                   | ozf                   |
|------------|---|-----------------------|-----------------------|--------------------|------------------------|-----------------------|-----------------------|
| 1N         | = | 1                     | 0.1020                | 102.0              | $100.4 \times 10^{-6}$ | 0.2248                | 3.597                 |
| 1kp        | = | 9.807                 | 1                     | 1000               | $0.984 \times 10^{-3}$ | 2.205                 | 35.27                 |
| 1p         | = | $9.81 \times 10^{-3}$ | $1 \times 10^{-3}$    | 1                  | $0.984 \times 10^{-6}$ | $2.2 \times 10^{-3}$  | $35.3 \times 10^{-3}$ |
| 1tonf (UK) | = | 9964                  | 1016                  | $1.02 \times 10^6$ | 1                      | 2240                  | $35.8 \times 10^3$    |
| 1lbf       | = | 4.448                 | 0.4536                | 453.6              | $0.5 \times 10^{-6}$   | 1                     | 16                    |
| 1ozf       | = | -                     | $28.4 \times 10^{-3}$ | 28.35              | $27.9 \times 10^{-6}$  | $62.5 \times 10^{-3}$ | 1                     |

## velocity

|         |   | km/h                  | m/min  | m/s                   | mile/h                | ft/min | ft/s                  | in/s   |
|---------|---|-----------------------|--------|-----------------------|-----------------------|--------|-----------------------|--------|
| 1km/h   | = | 1                     | 16.667 | 0.2778                | 0.6214                | 54.68  | 0.9113                | 10.936 |
| m/min   | = | 0.06                  | 1      | $16.7 \times 10^{-3}$ | $37.3 \times 10^{-3}$ | 3.281  | $54.7 \times 10^{-3}$ | 0.656  |
| 1m/s    | = | 3.6                   | 60     | 1                     | 2.237                 | 196.85 | 3.281                 | 39.37  |
| 1mile/h | = | 1.609                 | 26.82  | 0.4470                | 1                     | 88     | 1.467                 | 17.6   |
| 1ft/min | = | $18.3 \times 10^{-3}$ | 0.3048 | $5.08 \times 10^{-3}$ | $11.4 \times 10^{-3}$ | 1      | $16.7 \times 10^{-3}$ | 0.2    |
| 1ft/s   | = | 1.097                 | 18.288 | 0.3048                | 0.6818                | 60     | 1                     | 12     |
| 1in/s   | = | $91 \times 10^{-3}$   | 1.524  | $25.4 \times 10^{-3}$ | $56.8 \times 10^{-3}$ | 5      | $83.3 \times 10^{-3}$ | 1      |

## torque

|         |   | Nm                     | Ncm    | kgfm                  | lbf.ft                 | lbf.in                | ozf.in |
|---------|---|------------------------|--------|-----------------------|------------------------|-----------------------|--------|
| 1Nm     | = | 1                      | 100    | 0.10197               | 0.73756                | 8.8507                | 141.61 |
| Ncm     | = | 0.01                   | 1      | $1.02 \times 10^{-3}$ | $7.376 \times 10^{-3}$ | $88.5 \times 10^{-3}$ | 1.4161 |
| 1kgfm   | = | 9.8067                 | 980.67 | 1                     | 7.233                  | 86.796                | 1389   |
| 1lbf.ft | = | 1.356                  | 135.6  | 0.1383                | 1                      | 12                    | 192    |
| 1lbf.in | = | 0.1129                 | 11.29  | $11.5 \times 10^{-3}$ | $83.3 \times 10^{-3}$  | 1                     | 16     |
| 1ozf.in | = | $7.062 \times 10^{-3}$ | 0.7062 | $0.72 \times 10^{-3}$ | $5.21 \times 10^{-3}$  | $62.5 \times 10^{-3}$ | 1      |

## power

|           |   | kW                    | PS                     | hp                     | kgfm/s | ft.lbf/s |
|-----------|---|-----------------------|------------------------|------------------------|--------|----------|
| 1kW       | = | 1                     | 1.360                  | 1.341                  | 102.0  | 737.6    |
| 1PS       | = | 0.7355                | 1                      | 0.9863                 | 75     | 542.5    |
| 1hp       | = | 0.7457                | 1.014                  | 1                      | 76.04  | 550      |
| 1kgfm/s   | = | $9.81 \times 10^{-3}$ | $13.33 \times 10^{-3}$ | $13.15 \times 10^{-3}$ | 1      | 7.233    |
| 1ft.lbf/s | = | $1.36 \times 10^{-3}$ | $1.84 \times 10^{-3}$  | $1.82 \times 10^{-3}$  | 0.1383 | 1        |

## moment of inertia and other flywheel effects

|  |   | kgm <sup>2</sup> (mr <sup>2</sup> ) | kgfm <sup>2</sup> (GD <sup>2</sup> ) | lb.ft <sup>2</sup> (WK <sup>2</sup> ) | kpms <sup>2</sup>     | ft lbf s <sup>2</sup> |
|--|---|-------------------------------------|--------------------------------------|---------------------------------------|-----------------------|-----------------------|
| 1kgm <sup>2</sup> (mr <sup>2</sup> )   | = | 1                                   | 4                                    | 23.73                                 | 0.102                 | 0.7376                |
| 1kgfm <sup>2</sup> (GD <sup>2</sup> )  | = | 0.25                                | 1                                    | 5.933                                 | $25 \times 10^{-3}$   | 0.1844                |
| 1lb.ft <sup>2</sup> (WK <sup>2</sup> ) | = | $42.1 \times 10^{-3}$               | 0.1686                               | 1                                     | $4.30 \times 10^{-3}$ | $31.1 \times 10^{-3}$ |
| 1kpms <sup>2</sup>                     | = | 9.807                               | 39.23                                | 232.7                                 | 1                     | 7.233                 |
| 1ft lbf s <sup>2</sup>                 | = | 1.356                               | 5.423                                | 32.17                                 | 0.1383                | 1                     |

## length

|       | mm    | m      | in        | ft       | yds       | km        | miles     |
|-------|-------|--------|-----------|----------|-----------|-----------|-----------|
| 1mm   | 1     | 0.001  | 0.3937    | 0.0033   | 0.00109   | -         | -         |
| 1m    | 1000  | 1      | 39.370    | 3.2808   | 1.0936    | 0.001     | 0.0006215 |
| 1in   | 25.4  | 0.0254 | 1         | 0.0833   | 0.0277    | 0.0000254 | 0.0000158 |
| 1ft   | 304.8 | 0.3048 | 12        | 1        | 0.3333    | 0.000304  | 0.0001894 |
| 1yd   | 914.4 | 0.9144 | 36        | 3        | 1         | 0.000914  | 0.000568  |
| 1km   | -     | 1000   | 39,370.07 | 3,280.83 | 1,093.613 | 1         | 0.6215    |
| 1mile | -     | 1,609  | 63,346.45 | 5,278.87 | 1,759.623 | 1.609     | 1         |



Huco Engineering Industries Ltd  
Merchant Drive  
Hertford  
Hertfordshire SG13 7BL  
T: +44 (0)1992 501900  
F: +44 (0)1992 500035  
E: [sales@huco.com](mailto:sales@huco.com)  
W: [www.huco.com](http://www.huco.com)